


NOTES:

1. FOR WAVESOLDERING (SOLDER BATH TEMPERATURE 260°C FOR 5 SEC. AND SOLDER PREHEAT 100°C FOR 30 SEC.)
2. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
3. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
4. CONTACTS: COPPER ALLOY, PLATING (SEE PART-NO.):
 - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 - PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
 - PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
- CONTACT TAILS PRETINNED
5. MOUNTING BRACKET: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
6. RIVETED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. GROUNDING BRACKETS: COPPER ALLOY; TIN PLATED
8. P.C.B. HOLE DRILLINGS ON SHEET 2
9. CAPACITANCE: 830pF ± 20%
10. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
11. CONNECTOR IS PART MARKED: 241□11070X CONEC ABC (see note 3)

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm	scale: 2:1 (5:1)		
				material: SEE NOTES		
	drawn	12.09.14	Henneboel	title: D-SUB C- FILTER MALE 90° 25pos. SOLDER PIN ANGLED 0.370inch through hole,mounting bracket,grounding bracket		
	appd.	12.09.14	Lehmenkühler			
	norm					
rev.	a	Original			dwg no: 24K1A1550 DIN-A3 sh: 1/2	
description	date	name			part no: 241□11070X (see note 3)	

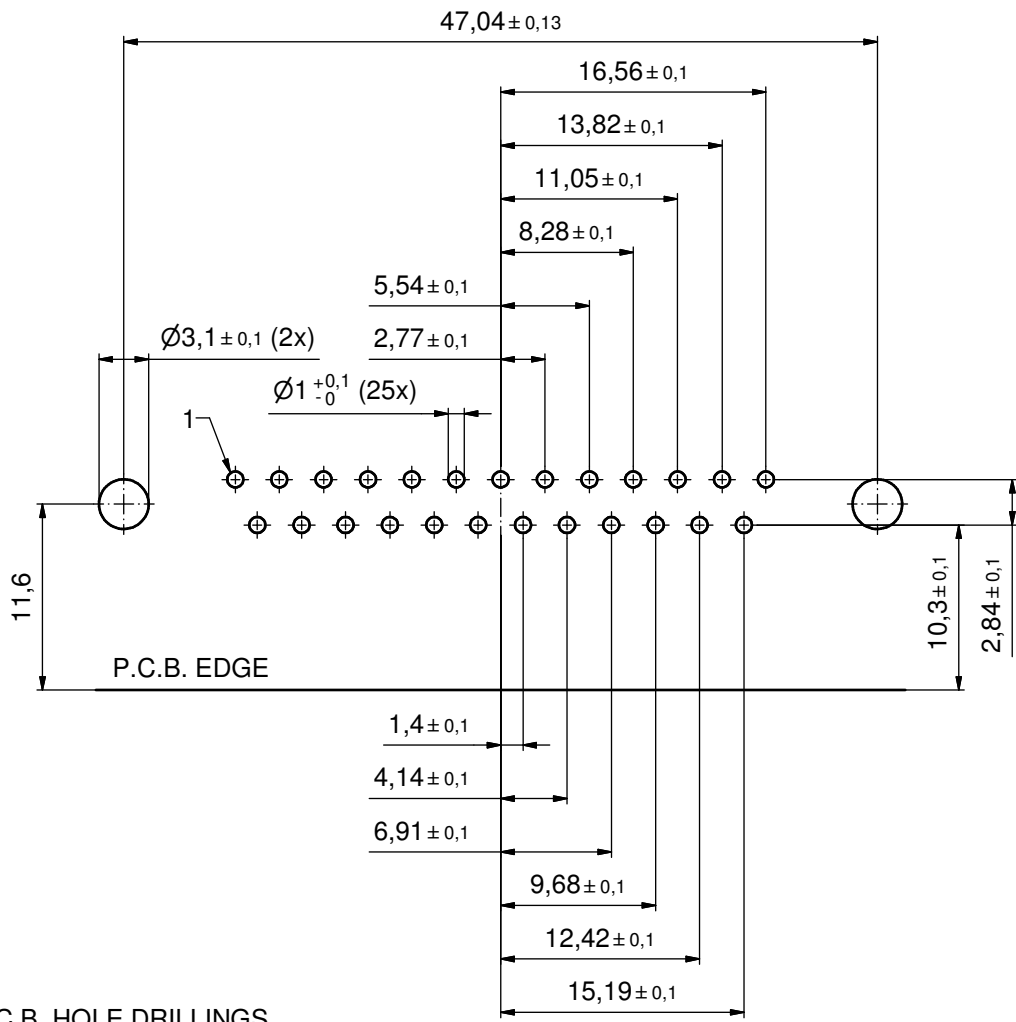

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance	dim. in mm	scale: 3:1		
					date		name	material: SEE SHEET 1	
					drawn	12.09.14	Henneboel	title: P.C.B. HOLE DRILLINGS D-SUB C- Filter Male 90°, 25pos. through hole, mounting bracket, grounding bracket	
					appd.	12.09.14	Lehmenkühler		
					norm				
					d-old				
		a	Original					dwg no: 24K1A1550	DIN-A3
	rev.	description	date	name				part no: SEE SHEET 1	sh: 2/2