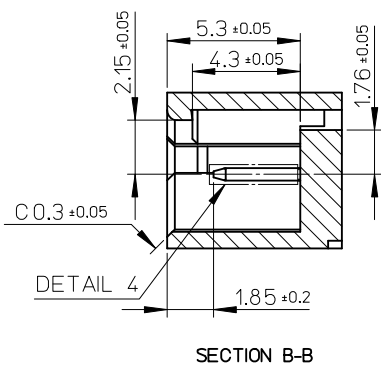
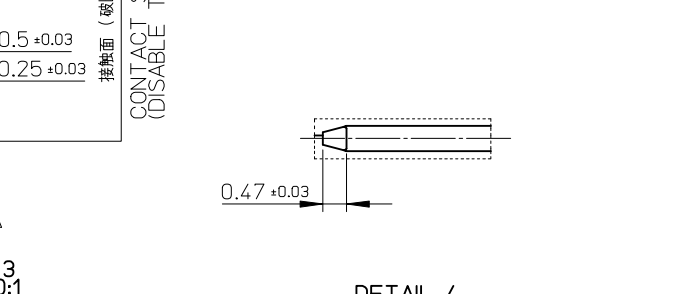
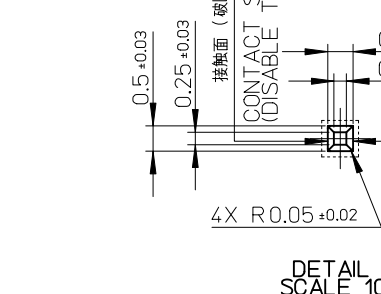
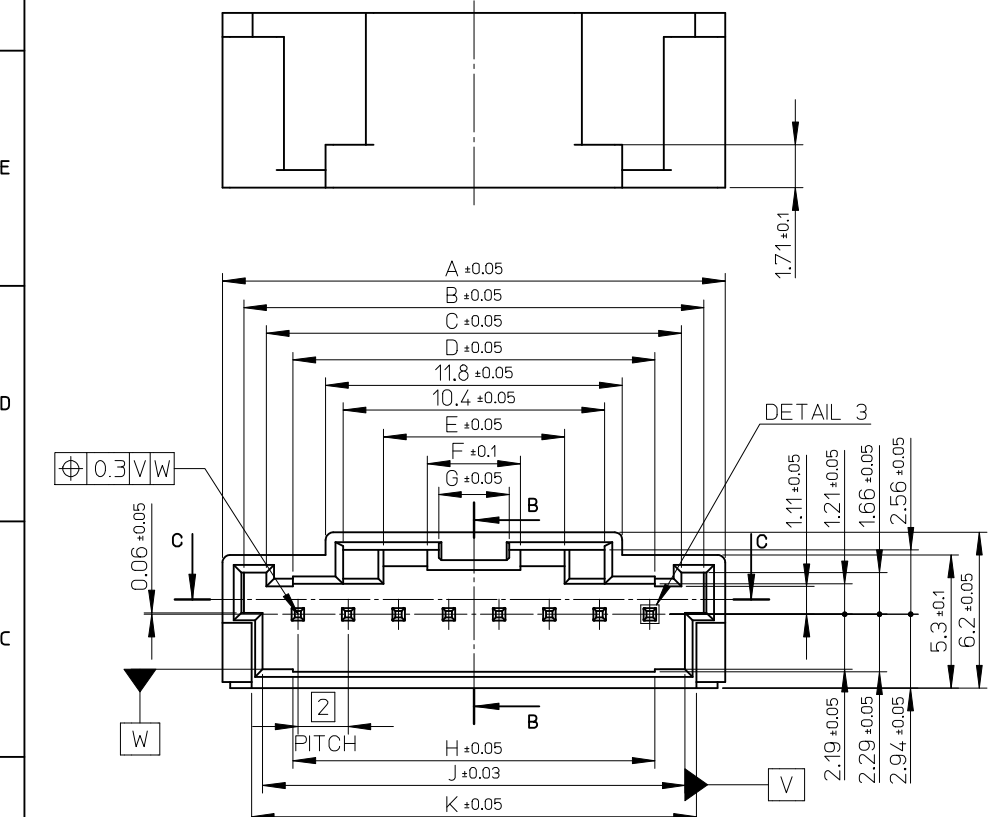


31.7	30.8	28.4	2.8	3.7	7.2	28.4	30.5	32.3	34	15
29.7	28.8	26.4	2.8	3.7	7.2	26.4	28.5	30.3	32	14
27.7	26.8	24.4	2.8	3.7	7.2	24.4	26.5	28.3	30	13
25.7	24.8	22.4	2.8	3.7	7.2	22.4	24.5	26.3	28	12
23.7	22.8	20.4	2.8	3.7	7.2	20.4	22.5	24.3	26	11
21.7	20.8	18.4	2.8	3.7	7.2	18.4	20.5	22.3	24	10
19.7	18.8	16.4	2.8	3.7	7.2	16.4	18.5	20.3	22	9
17.7	16.8	14.4	2.8	3.7	7.2	14.4	16.5	18.3	20	8
15.7	14.8	12.4	2.8	3.7	7.2	12.4	14.5	16.3	18	7
13.7	12.8	10.4	2.8	3.7	7.2	10.4	12.5	14.3	16	6
11.7	10.8	8.4	2.8	3.7	7.2			12.3	14	5
9.7	8.8	6.4	2.8	3.7	7.1			10.3	12	4
7.7	6.8	4.4	2	2.9	5.1			8.3	10	3
										2
K	J	H	G	F	E	D	C	B	A	CKT

注記
NOTES

1. 弊社製品寸法を保証するものではありません。
THIS DRAWING IS NOT GUARANTY DIMENSIONS FOR MOLEX PRODUCT.

2. 嵌合相手
MATES WITH
502351-**0*: DuraClik
505151-**00: DuraClik TPA
560123-**0*: DuraClik ISL

3. メッキ仕様
ピン: 銅合金、ニッケル下地(1μm以上)、錫メッキ(1μm以上)
PLATING SPEC
PIN: COPPER ALLOY, TIN(1μm MIN.) OVER NICKEL(1μm MIN.) PLATE.

4. 参照図面
REFERENCE DRAWING
SD-502352-001

RECOMMENDED DIMENSIONS
FOR CONNECTOR INTERFACE

RELEASED EC NO: JTR2016-0011 DRWN: YAMAKI CHKD: HKOMATSU APPR: MAYAMAMOTO	QUALITY SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- 0 PLACE ± --- ± --- ANGULAR ± - ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY		SCALE 5:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
			DRAWN BY YAMAKI		DATE 2015/03/25		TITLE 2.0MM PITCH W/B CONN. INTERFACE DRAWING			
			CHECKED BY HKOMATSU		DATE 2015/07/24		molex			
			APPROVED BY MAYAMAMOTO		DATE 2015/07/24					
0	REV		MATERIAL NO. ---		DOCUMENT NO. SD-502352-003-JP		SHEET NO. 1 OF 2			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

