
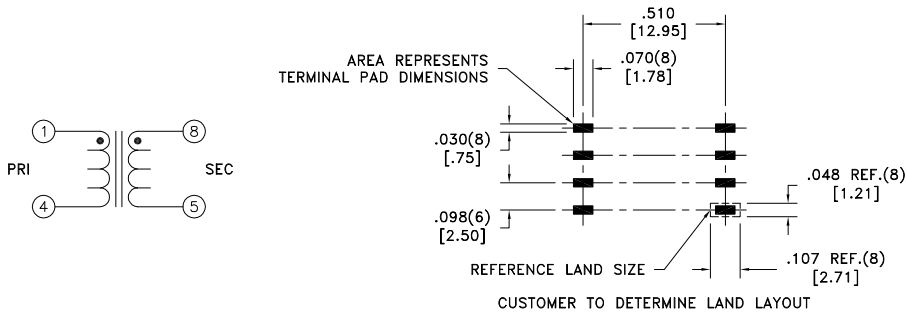


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

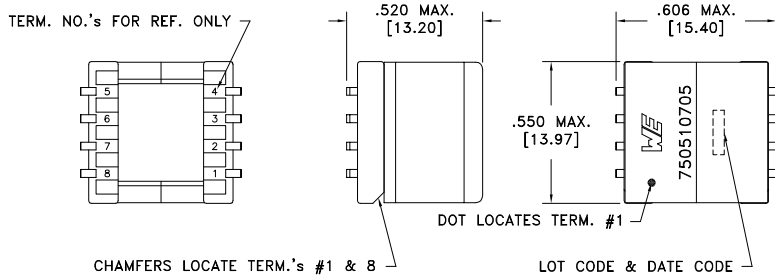

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.200 ohms max.
D.C. RESISTANCE	8-5 @20°C	0.200 ohms max.
INDUCTANCE	1-4 100kHz, 1.0VAC, Ls	500uH ±30%
INDUCTANCE	1-4 100kHz, 1.0VAC, 15mADC, Ls	500uH ±30%
LEAKAGE INDUCTANCE	1-4 tie(5+8), 75kHz, 50mVAC, Ls	1.6uH max.
INTERWINDING CAPACITANCE	1-8 tie(1+4, 5+8), 75kHz, 1.0VAC, Cs	40pF max.
DIELECTRIC	1-8 2000VAC, 1 second	1500VAC, 1 minute
TURNS RATIO	(1-4):(8-5)	1:1, ±1%

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -20°C to +80°C.

Safety standard undefined.

VOLT-TIME PRODUCT: 635Vusec max.,\* 1-4. (\*-Based on sine wave voltage, 3000 Gauss and minimum cross sectional core area.)

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-1079 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750510705</b>
6A	9/16	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750510705	SPECIFICATION SHEET 1 OF 1