


| LOC | DIST | REVISIONS   |               |          |        |
|-----|------|-------------|---------------|----------|--------|
| P   | LTR  | DESCRIPTION | DATE          | DWN      | APVD   |
| B   | E    | B           | ECR-11-018638 | 08/09/11 | MJG JA |
|     |      |             |               |          |        |
|     |      |             |               |          |        |

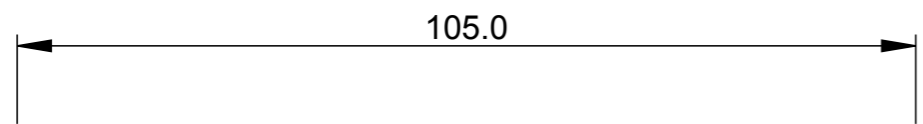

Use two halves of strain relief attach the strain relief around the outer cable jacket. Different sizes of the strain relief can be mixed together to give the best fit. For cable diameters exceeding 9mm, assy without the strain relief or with just one strain relief half is applicable

Strip the cable outer jacket 18mm


Shape the braided shield to two pigtails

Bend cable shield back on the outside of strain relief. If not using any strain relief from the supplied set, use same procedure around the cable outer jacket

Mount connector and cable into the backshell

Assemble the other half screwing force: 100-120 Ncm.

**SIDE 1**

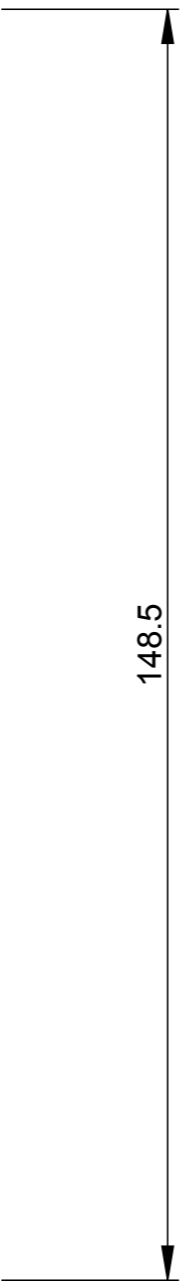

Use two halves of strain relief attach the strain relief around the outer cable jacket. Different sizes of the strain relief can be mixed together to give the best fit. For cable diameters exceeding 9mm, assy without the strain relief or with just one strain relief half is applicable

Strip the cable outer jacket 18mm

Shape the braided shield to two pigtails

Bend cable shield back on the outside of strain relief. If not using any strain relief from the supplied set, use same procedure around the cable outer jacket

Mount connector and cable into the backshell.

Assemble the other half screwing force: 100-120 Ncm.

**SIDE 2**

|  |  |                        |          |               |  |
|--|--|------------------------|----------|---------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN<br><b>AJ BEKEN</b> | 07/03/02 |               | <b>LEAFLET</b><br><b>ASSEMBLY INSTRUCTIONS</b><br><b>ADK BACKSHELL</b> |
| DIMENSIONS:<br>mm                      |  | CHK<br><b>C NEALE</b>  | 07/03/02 |               |  |
|  |  | APVD<br><b>F W K</b>   | 07/03/02 |               |  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | PRODUCT SPEC           |          | NAME          |  |
| 0 PLC ±-                               |  | -                      |          | -             |  |
| 1 PLC ±-                               |  | -                      |          | -             |  |
| 2 PLC ±-                               |  | -                      |          | -             |  |
| 3 PLC ±-                               |  | -                      |          | -             |  |
| 4 PLC ±-                               |  | -                      |          | -             |  |
| ANGLES ±0.5                            |  | APPLICATION SPEC       |          | SIZE          |  |
| MATERIAL                               |  | WEIGHT                 |          | CAGE CODE     |  |
| FINISH                                 |  | -                      |          | DRAWING NO    |  |
|  |  | CUSTOMER DRAWING       |          | A300779       |  |
|  |  |                        |          | RESTRICTED TO |  |
|  |  |                        |          | -             |  |
|  |  |                        |          | SCALE         |  |
|  |  |                        |          | NTS           |  |
|  |  |                        |          | SHEET         |  |
|  |  |                        |          | 1 OF 1        |  |
|  |  |                        |          | REV           |  |
|  |  |                        |          | B             |  |