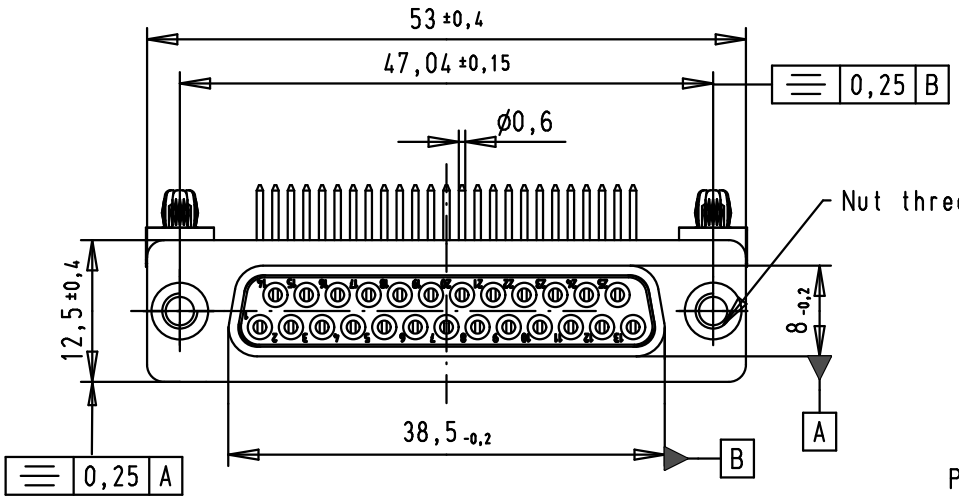

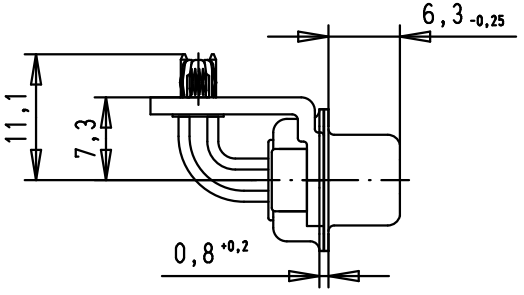

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

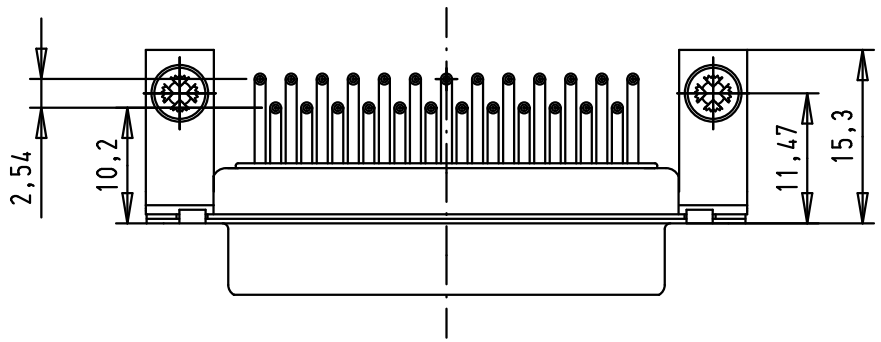

PCB Layout, Component side, thickness 1,6 mm

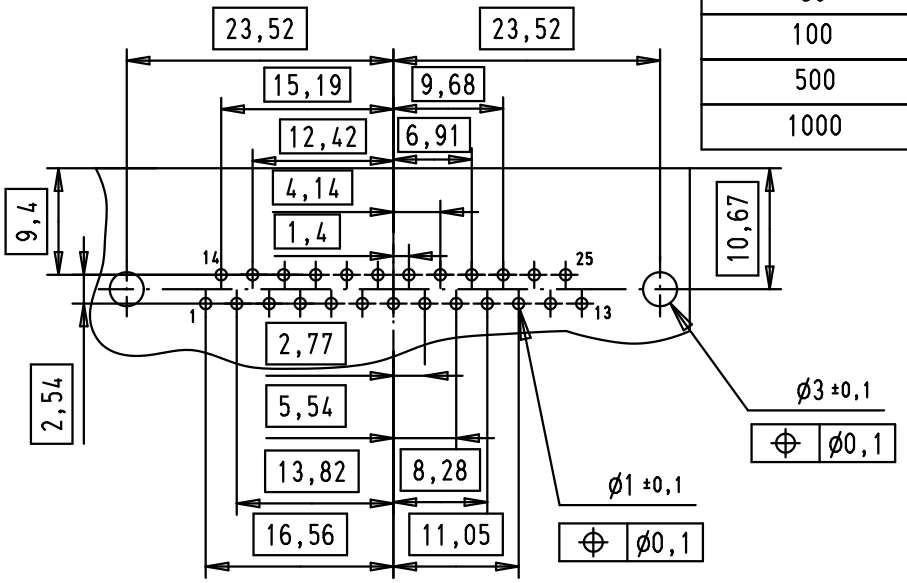

							Dat.	Name	All Dim. in mm Orig. Size DIN A 4	D-Sub, female, angled, 25 Poles, turned solder pins, board-locks and clinch nuts
						Detail.	8-JUL-02	CV		Ma?Mstab/ Scale 1.5:1
						Insp.	12/01/12	JB		
			36283	12/01/12	SD	Stand.				
09643147243	M3		33416	19/01/06	JMDR	HARTING EURL F-95972 Paris				TB 0964314724x
09643147242	UNC 4-40		31058	8-JUL-02	CV					Sub.
Part number	Nut thread		Mod.	Dat.	Name					Blatt/ Page 1/4