
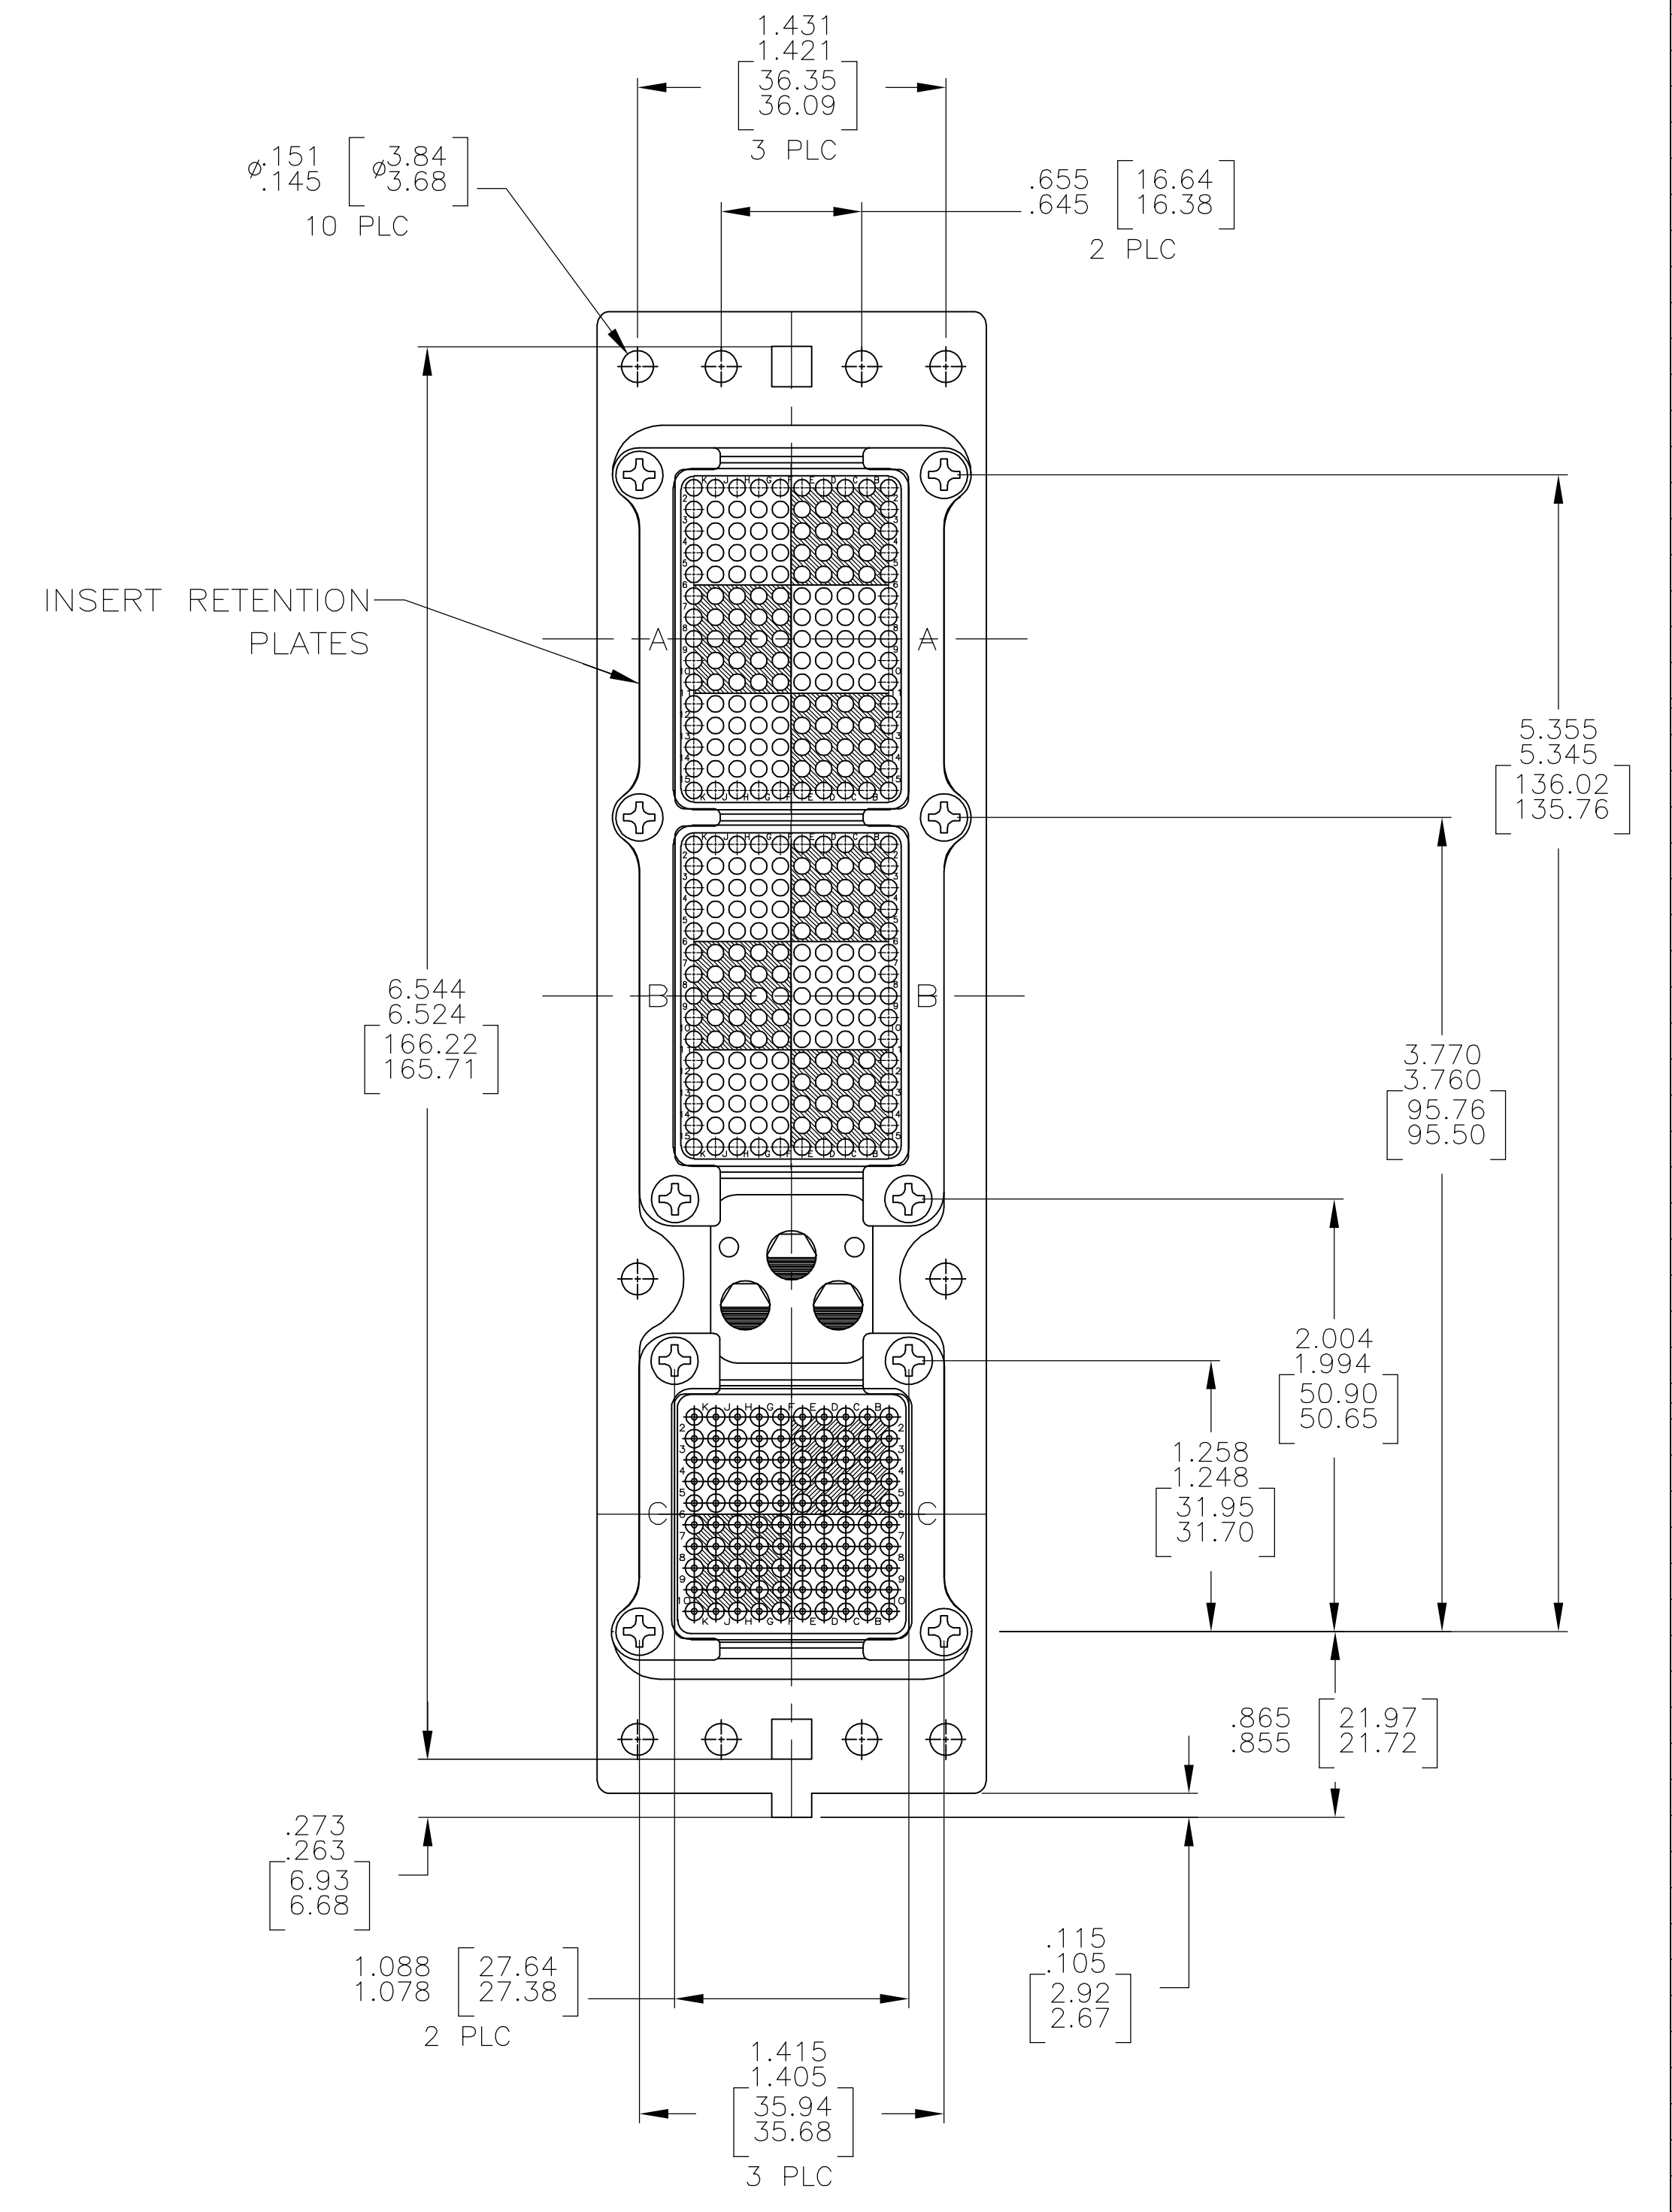
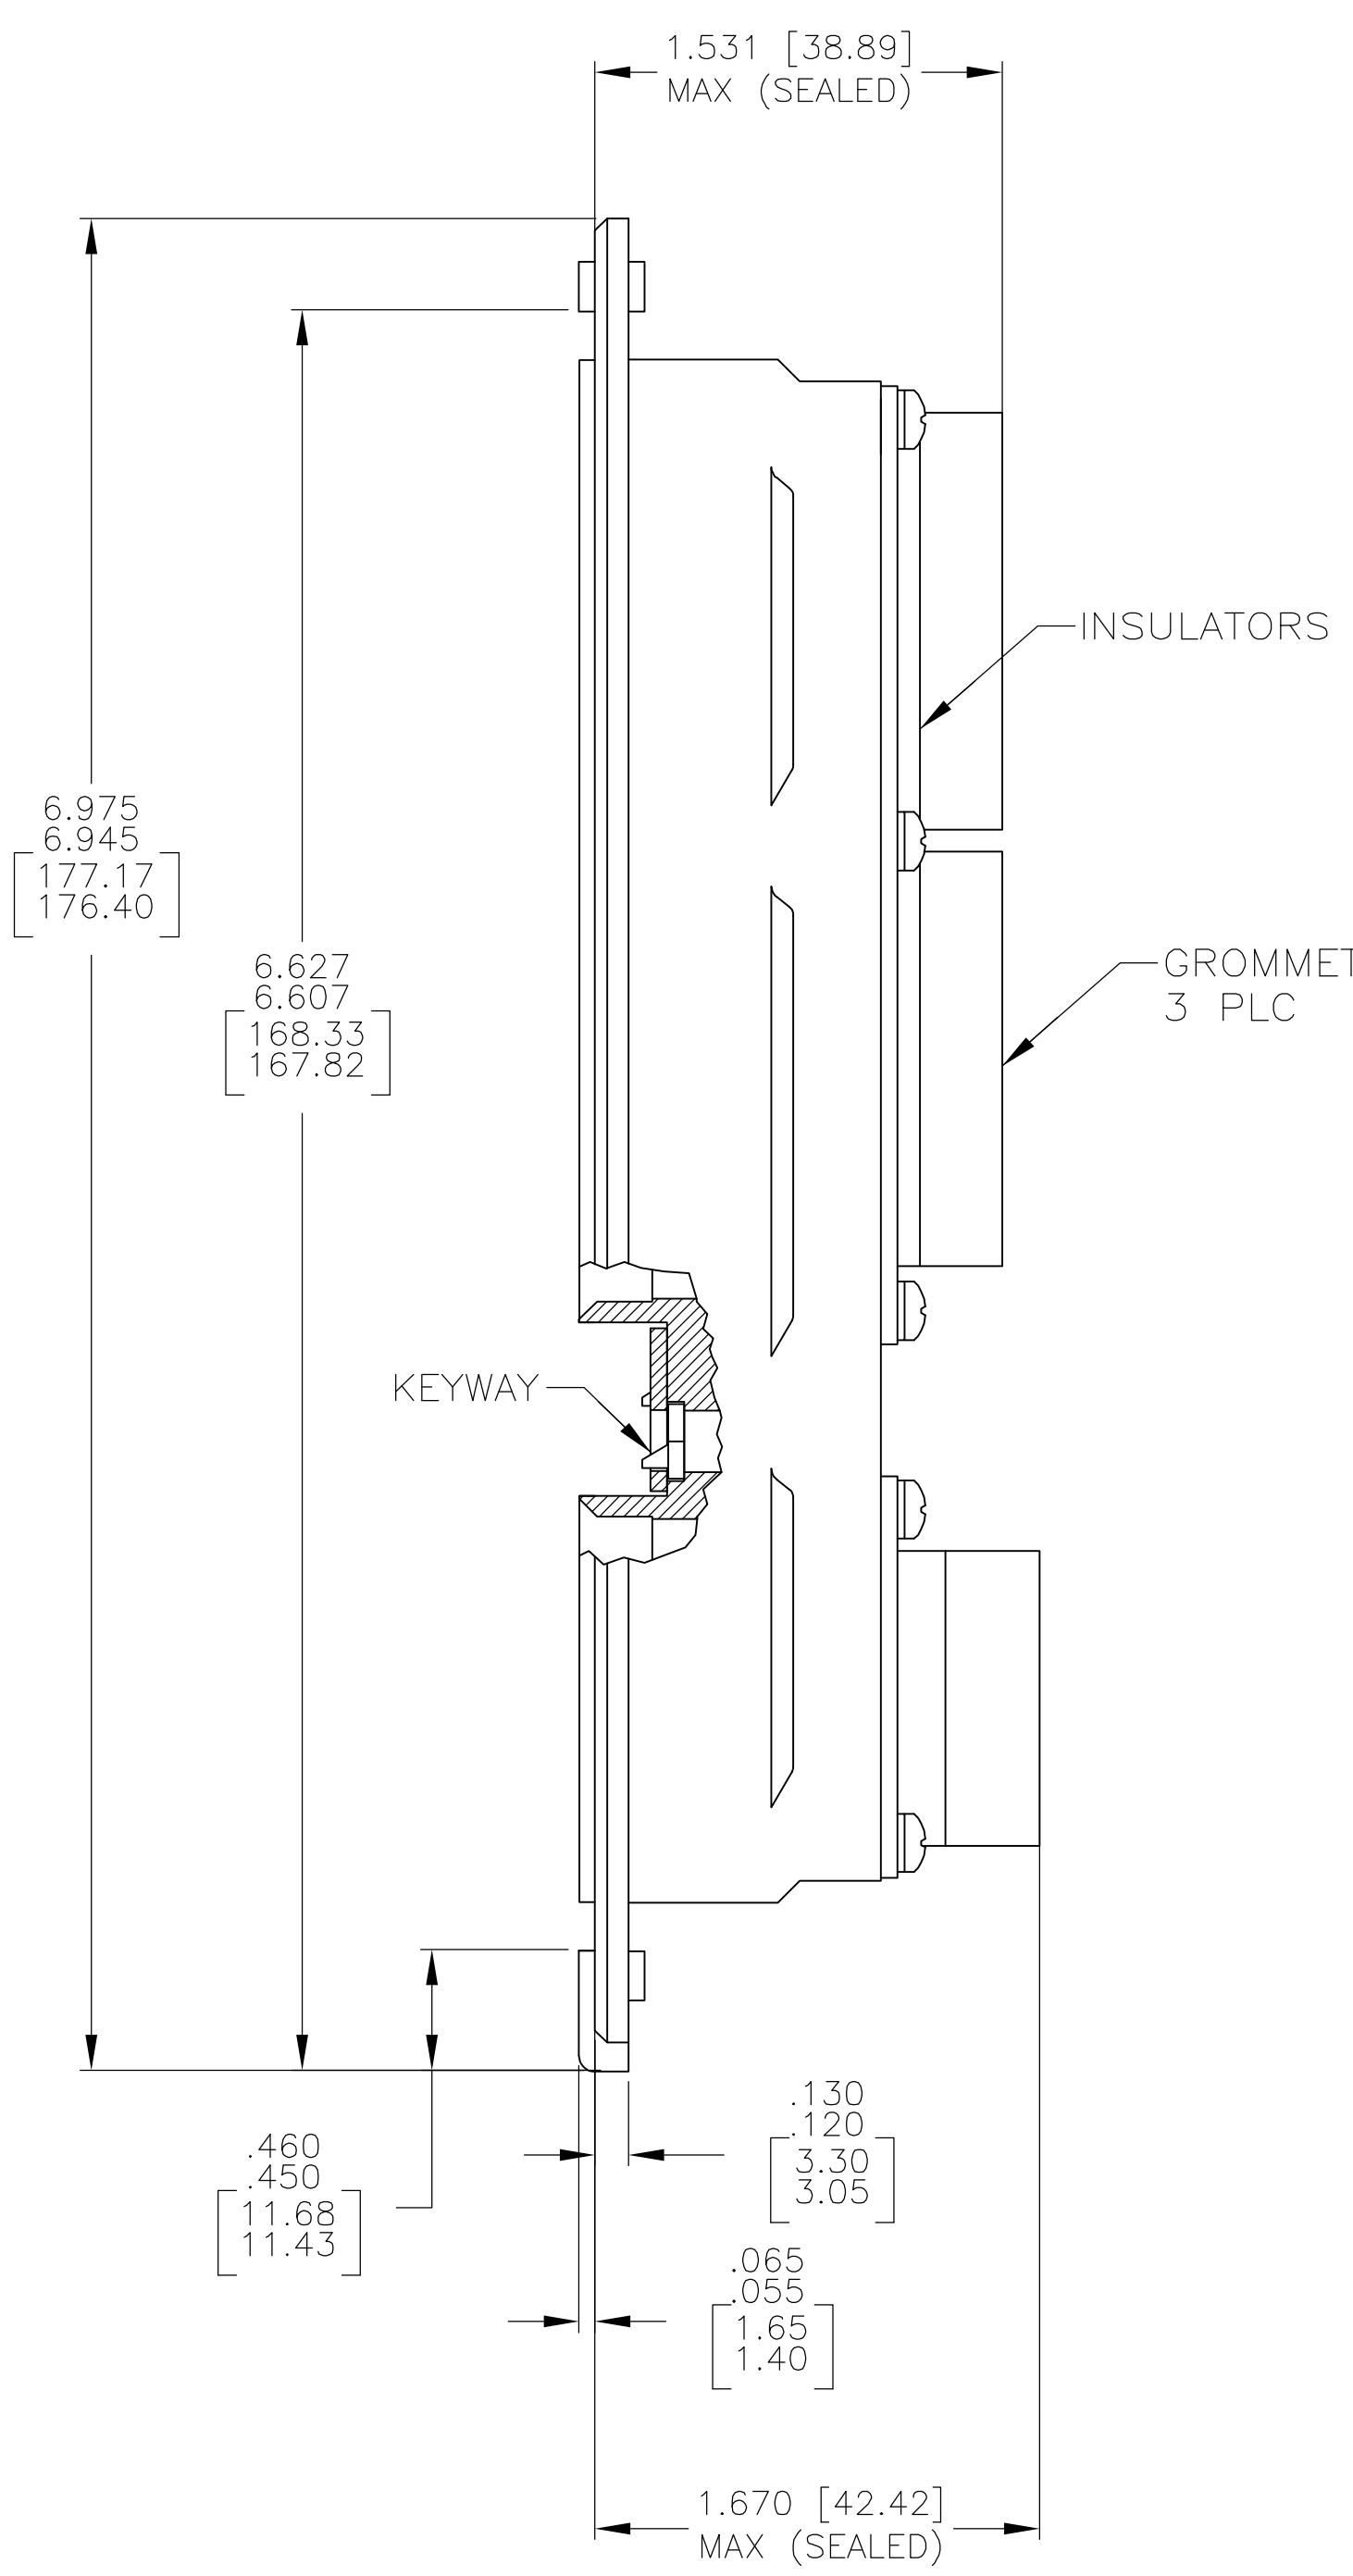


LOC		DIST		REVISIONS			
DF	AO	REV	DATE	BY	CHK	APPV	
		0	RELEASED	10-3-05	CT	KH	

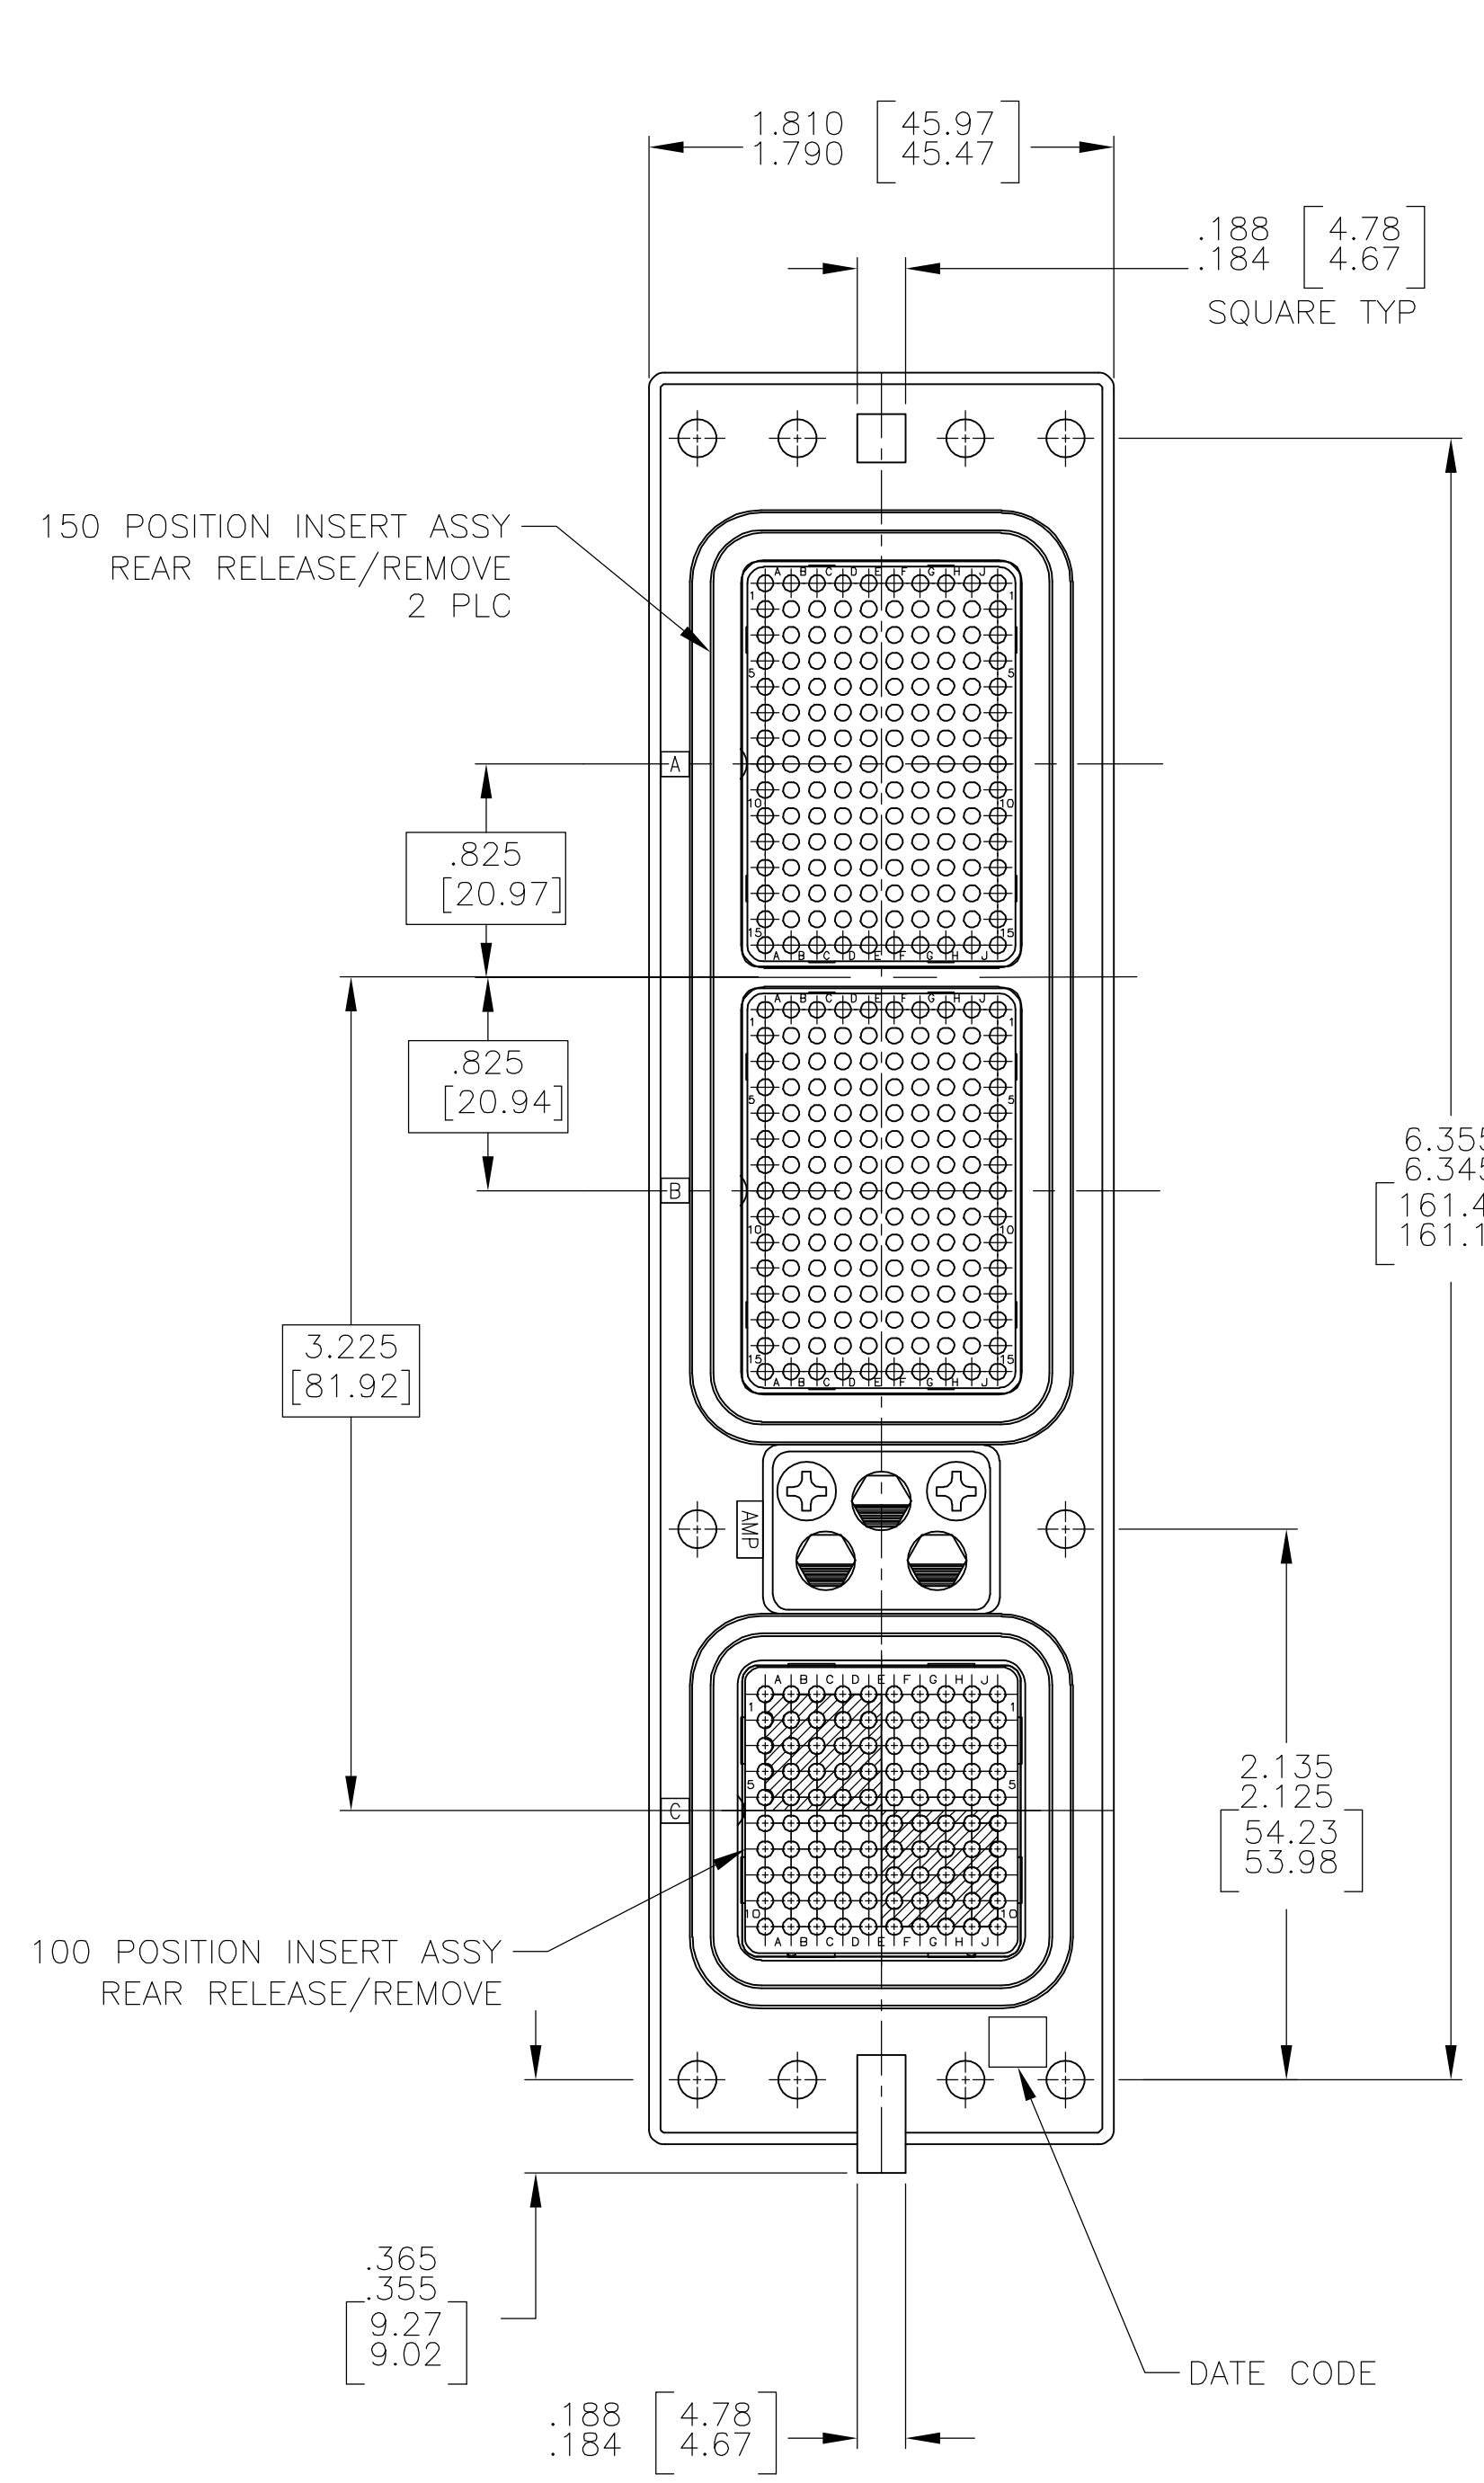

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
 - FOLLOWING CONTACTS ARE INCLUDED AND NOT LOADED:
 SIZE 22 SOCKET CONTACT: AMP P/N 208264-2; QTY: 400
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A
INSERT RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING KEYS	ZINC ALLOY PER ASTM-B-86	-
INSERTS	THERMOSET OR THERMOPLASTIC PPS PER MIL-M-24519	-
POLARIZING KEY RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
-	-	-

NIC66G26B01AA0	01	1883070-1
DESCRIPTIVE NUMBER	KEYING POSITION	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: C.C. THOMAS 9-30-05, CHK: K. HOGAN 10-3-05, APPV: K. HOGAN 10-3-05 Tyco Electronics Corporation, Harrisburg, PA 17105-3608 RCPT ASSY, SIZE 2, SEALED, ARINC 600 (150/150/100) SIZE: A1, CAGE CODE: 00779, DRAWING NO: 1883070, RESTRICTED TO: - CUSTOMER DRAWING, SCALE: 1.5:1, SHEET: 1 OF 1, REV: 0		