



**S22K0C-PD8PJG0-700S**  
**series\_k, type\_s2**

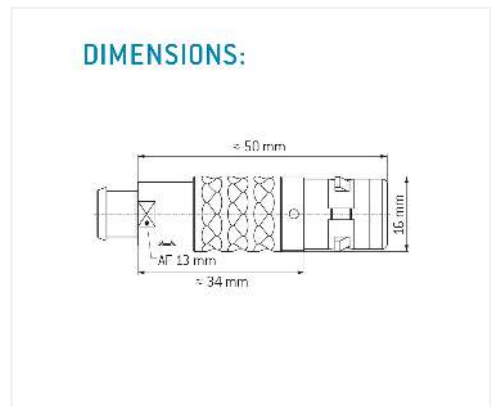

**General information**

<b>Part number</b>	S22K0C-PD8PJG0-700S
<b>Termination</b>	crimp
<b>Size</b>	2
<b>Locking principle</b>	push
<b>Coding</b>	0_key
<b>Cable Diameter</b>	cable_mini_70
<b>Cable outlet</b>	bend_relief

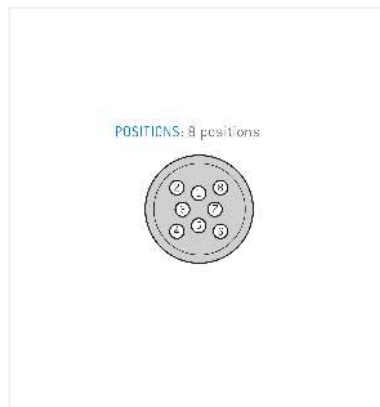

**Contact insert description**

<b>Number of contacts</b>	8
<b>Contact type</b>	pins
<b>Contact diameter</b>	09mm
<b>Insulator material</b>	peek
<b>Wire cross section</b>	22-26_awg
<b>Termination</b>	crimp
<b>Data transmission</b>	ethernet_10

reverse\_gender\_on\_request

**Connection diagram**

con\_ethernet\_10

**Technical information**

<b>Max. creepage and air clearance distance</b>	12_mm	08_mm
<b>Nominal current single contact</b>	075_a	iec_60512_5_2
<b>Nominal current insert</b>	4,875 A	vde_0298_4
<b>Test voltage</b>	15_kv_ac	sae_13441

safety\_text

## Mechanical and environmental data

Degree of protection*	ip68
Operating temperature	40_120_c
Mating cycles	5000

mated

## Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

data\_text

safety\_text\_2

data\_text

ul\_text

illustrative\_text