


DASH NO	CABLES ACCOMODATED	A HEX	ASSEMBLE PER
-003	RG-174, 316	.178	TAI-221
-004	RG-179, 187		
-005	NORTHERN ELECTRIC DBL-SHLD RG-187	.197	
-006	GC875GPI, GRUMMAN DBL-SHLD RG-188		
-007	275-3991, MICRODOT		
-008	RG-195, -180 421-111, ESSEX	.178	
-009	8218, BELDEN 21-597, ESSEX YR23023, BELDEN		
-011	RG-58, RG-141, RG-303	.213	
-013	RG-59		
-013A	TCC-75-2	.255	TAI-C118
-013B	RG-62		TAI-221
-014	8212, BELDEN		
-015	730A, LUCENT	.290	TAI-C118
-015A	RG-71		TAI-221
-016	724, LUCENT 8281, BELDEN	.324	
-017	RG-6	.344	
-018	9268, BELDEN	.255	
-019	8279, BELDEN	.290	TAI-C118
-020	9248, BELDEN		TAI-221
-022	88241, 88269, BELDEN	.255	TAI-243
-023	89108, BELDEN	.290	
-024	89120, BELDEN	.255	TAI-221
-025	734A, LUCENT		
-026	735A, LUCENT	.178	TAI-221
-026-X			
-027	KS19224L2, LUCENT	.324	TAI-231
-030	32448A, DRAKA		
-054	1725A/B AVAYA	.344	

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
P	REVISED PER ECO 16946	8/5/09	WMCX

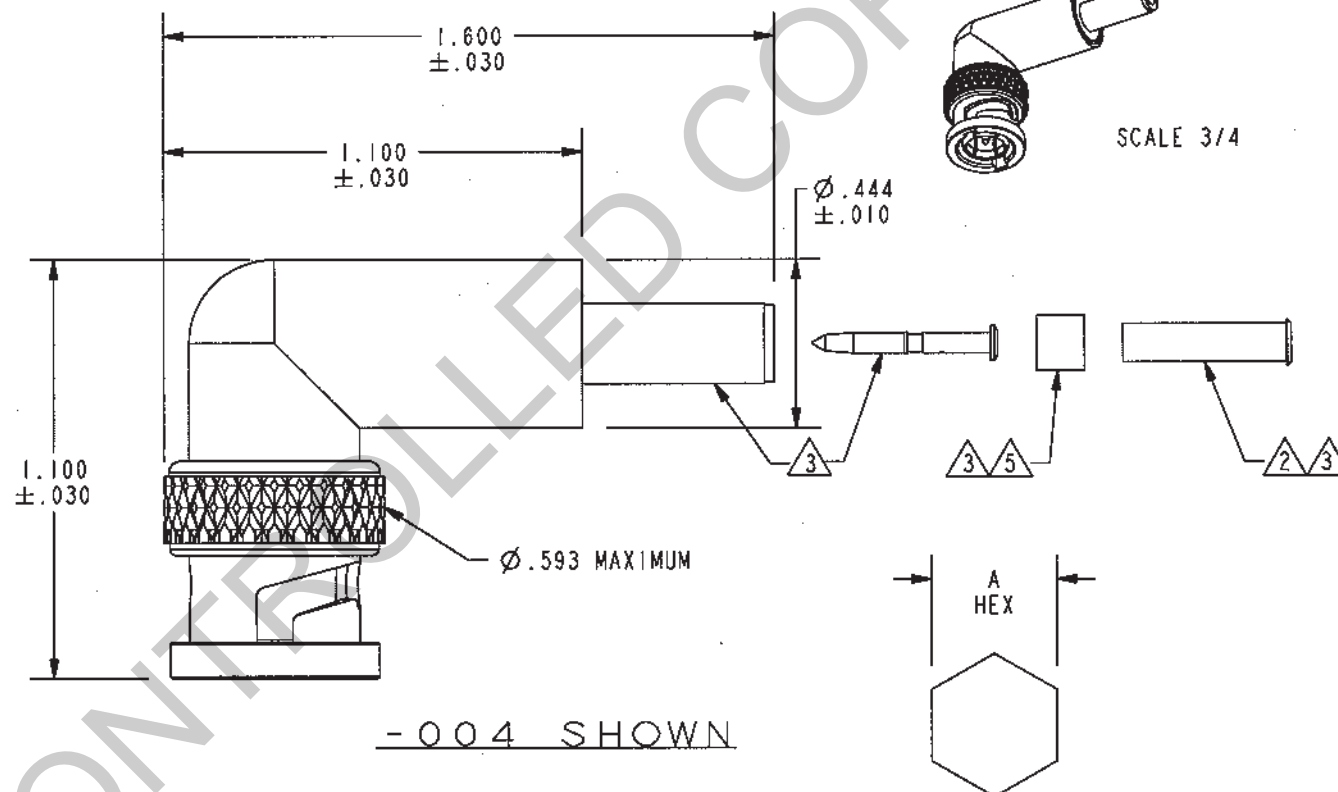

6. EXAMPLE OF COMPLETE MODEL NUMBER:

UPLR220 - 025

BASIC MODEL NUMBER

DASH NUMBER (CABLE GROUP)

- 5 CONTACT SUPPORT BUSHING REQUIRED -013B, -015A & -022 ONLY

4. RF COAXIAL 75Ω BNC FULL CRIMP RIGHT ANGLE CABLE PLUG

- 3 PIN, SLEEVE, CRIMP SLEEVE & CONTACT SUPPORT BUSHING ARE SUPPLIED LOOSE

- 2 SLEEVE REQUIRED ON -003 THRU -007 & -027 ONLY

1. FINISH TFS-1A (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

RED INDICATES ORIGINAL

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .02 .XXX ± .010 ANGLE ± 1°		 a cinch connectivity solutions brand	
DRN	L.M. 8-5-09	MATERIAL:	TITLE:		
CHK	m.J. 8-5-09	FINISH:	UPLR220		
QUALITY			SIZE	CAGE CODE	DRAWING NO.
MANUF			A	14949	1-0504
APPROVED	8-5-09	DO NOT SCALE DWG	SCALE	2/1	DATE 3-11-94
PROJ FILE NO.	1-0504				SHEET 1C

NEXT ASSY