
1-532436-2 - ACTIVE

AMP-HDI

TE Internal #: 1-532436-2 PCB Mount Header, Vertical, Board-to-Board, 300 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal, Black

View on TE.com >



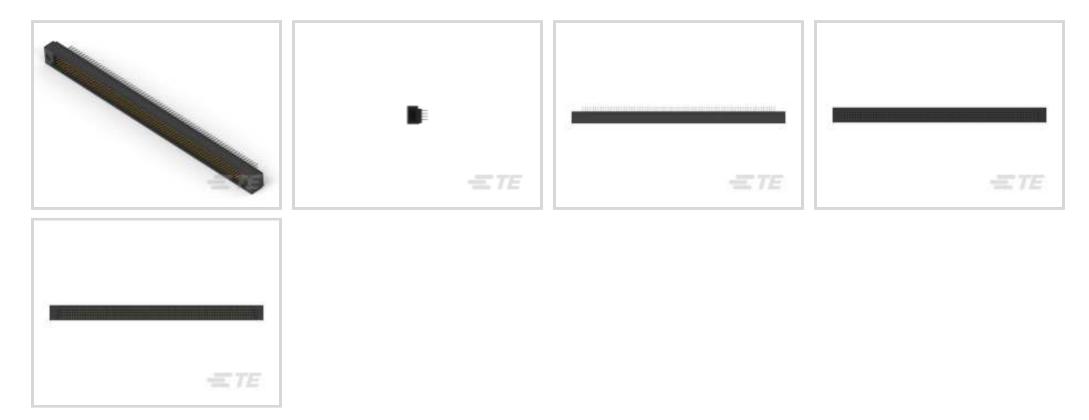

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 300

Number of Rows: 4

Features



Product Type Features

PCB Connector Assembly Type	PCB Mount Header	
Connector System	Board-to-Board	
Header Type	Fully Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Stackable	No	
PCB Mount Orientation	Vertical	
Number of Positions	300	
Number of Rows	4	
Electrical Characteristics		
Insulation Resistance	4 MΩ	
Body Features		
Primary Product Color	Black	

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 300 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal, Black



Contact Features

	.21 in			
Mating Square Post Dimension	.64 mm[.025 in]			
Contact Layout	Matrix			
Contact Shape & Form	Four Beam			
PCB Contact Termination Area Plating Material	Tin			
Contact Base Material	Phosphor Bronze			
Contact Mating Area Plating Material	Gold			
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]			
Contact Type	Pin			
Contact Current Rating (Max)	3 A			
Termination Features				
Square Termination Post & Tail Dimension	.64 mm[.025 in]			
Termination Post & Tail Length	4.83 mm[.19 in]			
Termination Method to Printed Circuit Board	Through Hole - Solder			
Mechanical Attachment				

Mating Alignment	Without	
Mating Alignment Type	Keyed	
PCB Mount Retention	Without	
PCB Mount Alignment	Without	
Connector Mounting Type	Board Mount	
Housing Features		
Centerline (Pitch)	2.54 mm[.1 in]	
Housing Material	Thermoplastic	
Dimensions		
Connector Height	11.73 mm[.462 in]	
PCB Thickness (Recommended)	4.69 mm[.2 in]	
Usage Conditions		
Housing Temperature Rating	High	
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]	
Operation/Application		

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 300 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal, Black



Solder Process Feature	
	Board Standoff
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	2
Packaging Type	Tube
Product Compliance	
For compliance documentation, visit the product page on TE.com>	Not Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant Compliant with Exemptions
For compliance documentation, visit the product page on TE.com>	Not Compliant Compliant with Exemptions Restricted Materials Above Threshold

Halogen Content

Solder Process Capability

, a libre bare beage blaterineriter

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

PCB Mount Header, Vertical, Board-to-Board, 300 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal, Black





Customers Also Bought

	E TE	ининининининининининин Талааттататататататата Талааттатататататата	
TE Part #YDTS20F25-35ABV001 RECP ASSY	TE Part #532903-8 HDI RECP ASSY 4 ROW 220 POS	TE Part #532448-2 HDI PIN ASSY 4 ROW 120 POS	TE Part #2169662-9 A/L UNIV HDR 40P VERT SHT LAT
TE Part #2169663-7 A/L UNIV HDR 30P VERT	TE Part #3-100161-0 Z-PACK/C F-HDR 55P		

Documents

Product Drawings HDI PIN ASSY 4 ROW 300 POS

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-532436-2_T.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-532436-2_T.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-532436-2_T.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

S For support call+1 800 522 6752

07/27/2023 06:17AM | Page 4

PCB Mount Header, Vertical, Board-to-Board, 300 Position, 2.54 mm [.1 in] Centerline, Fully Shrouded, Gold, Through Hole - Solder, Signal, Black



Datasheets & Catalog Pages

1-1773957-5_AMP_HDI_BTB_CONNECTORS_EN

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals Agency Approval Document

English