

10135271-10XLF

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

SEE NOTE 2

LETTER DESIGNATION REPRESENTED IN DASH NUMBER

MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 3)	N	J (NO KEY)	A	B	C	D	E	F	G	H	
	NO KEY NO GUIDE PIN										
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 2)	Z	Y (NO KEY)	P	Q	R	S	T	U	V	W	
	NO KEY NO GUIDE PIN										





Amphenol
FCi

© 2016 AFci

NOT TOOLED
PRELIMINARY

spec ref	-	dr	Jeny Ren	20150529	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	20160314			ecn no	-	rel level	Preliminary
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	product family			AIRMAX VS2			
surface	-	appr	-	Amphenol FCi	title	AIRMAX VSE VERTICAL HEADER	dwg no	10135271	rev	1
ASME Y14.5	linear	0.X	±0.3	0.XX	±0.15	0.XXX	±0.050	angular	0°	±2°
		cat. no.	-	Product - Customer Drw		sheet 1 of 4				

RIGHT POLARIZING WITH GUIDE

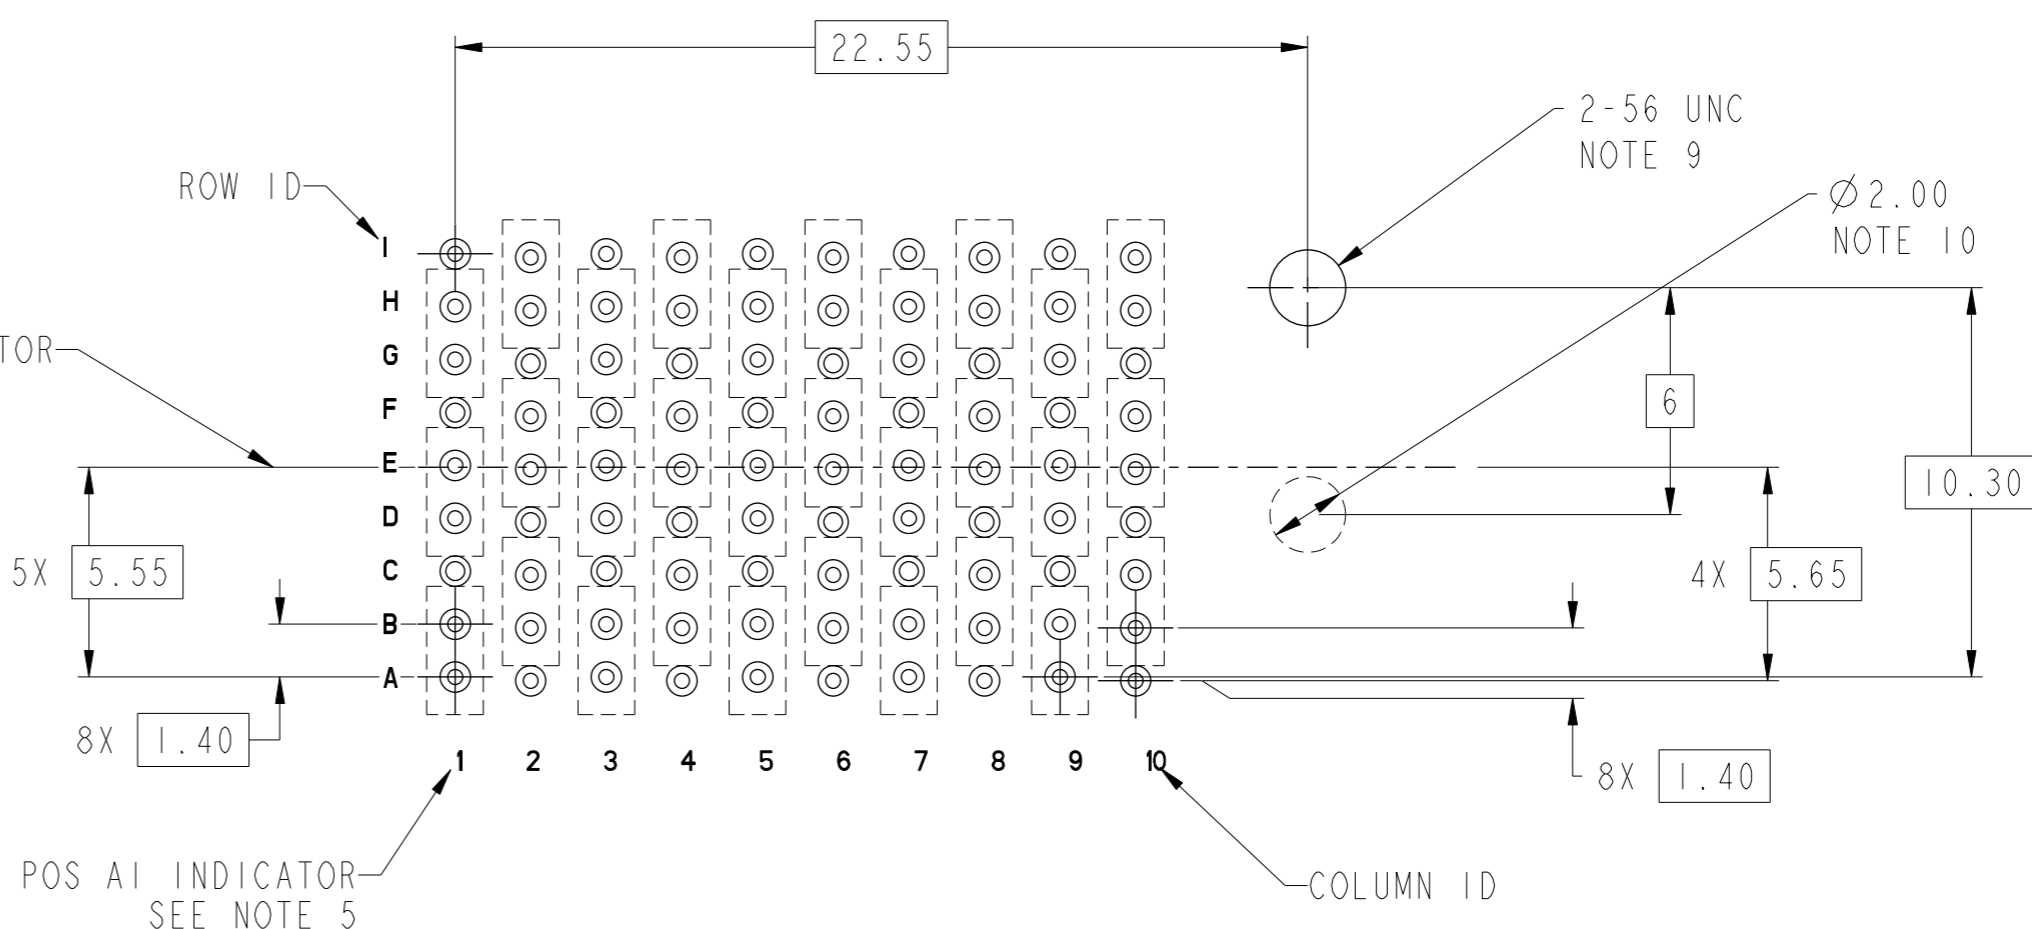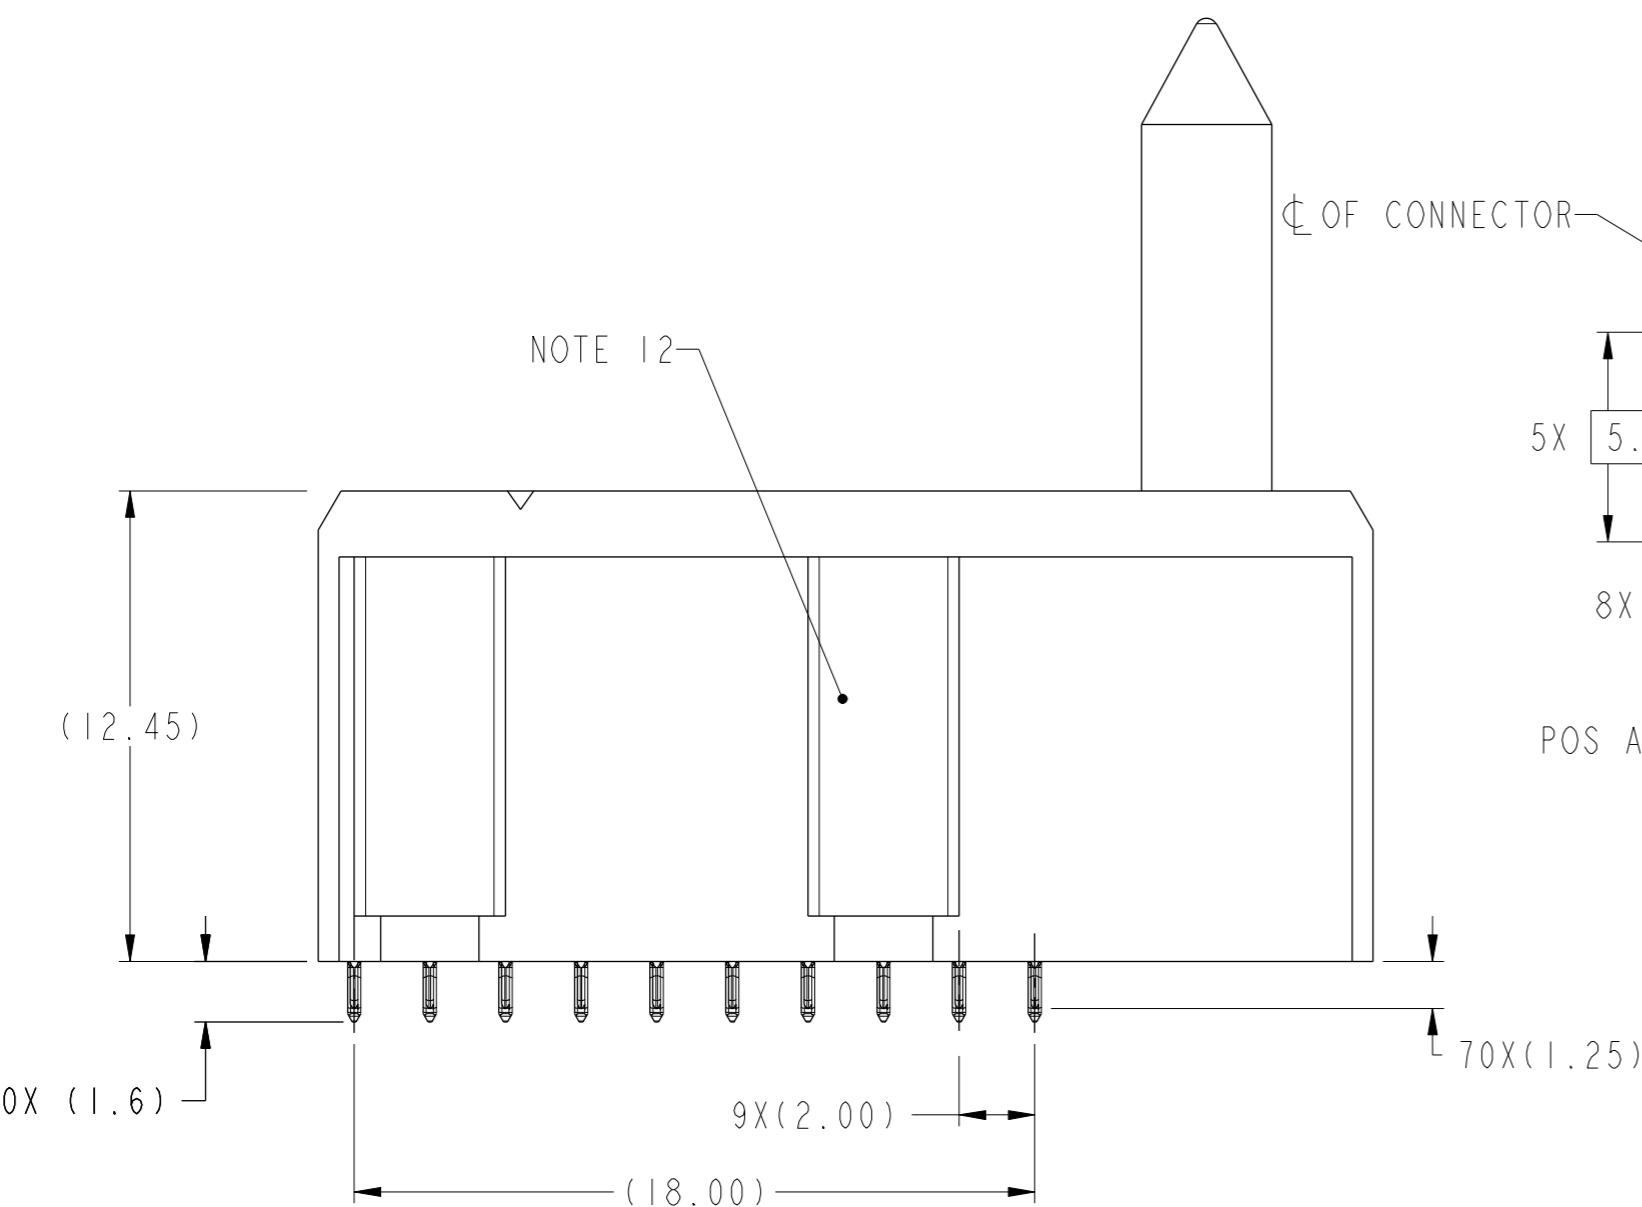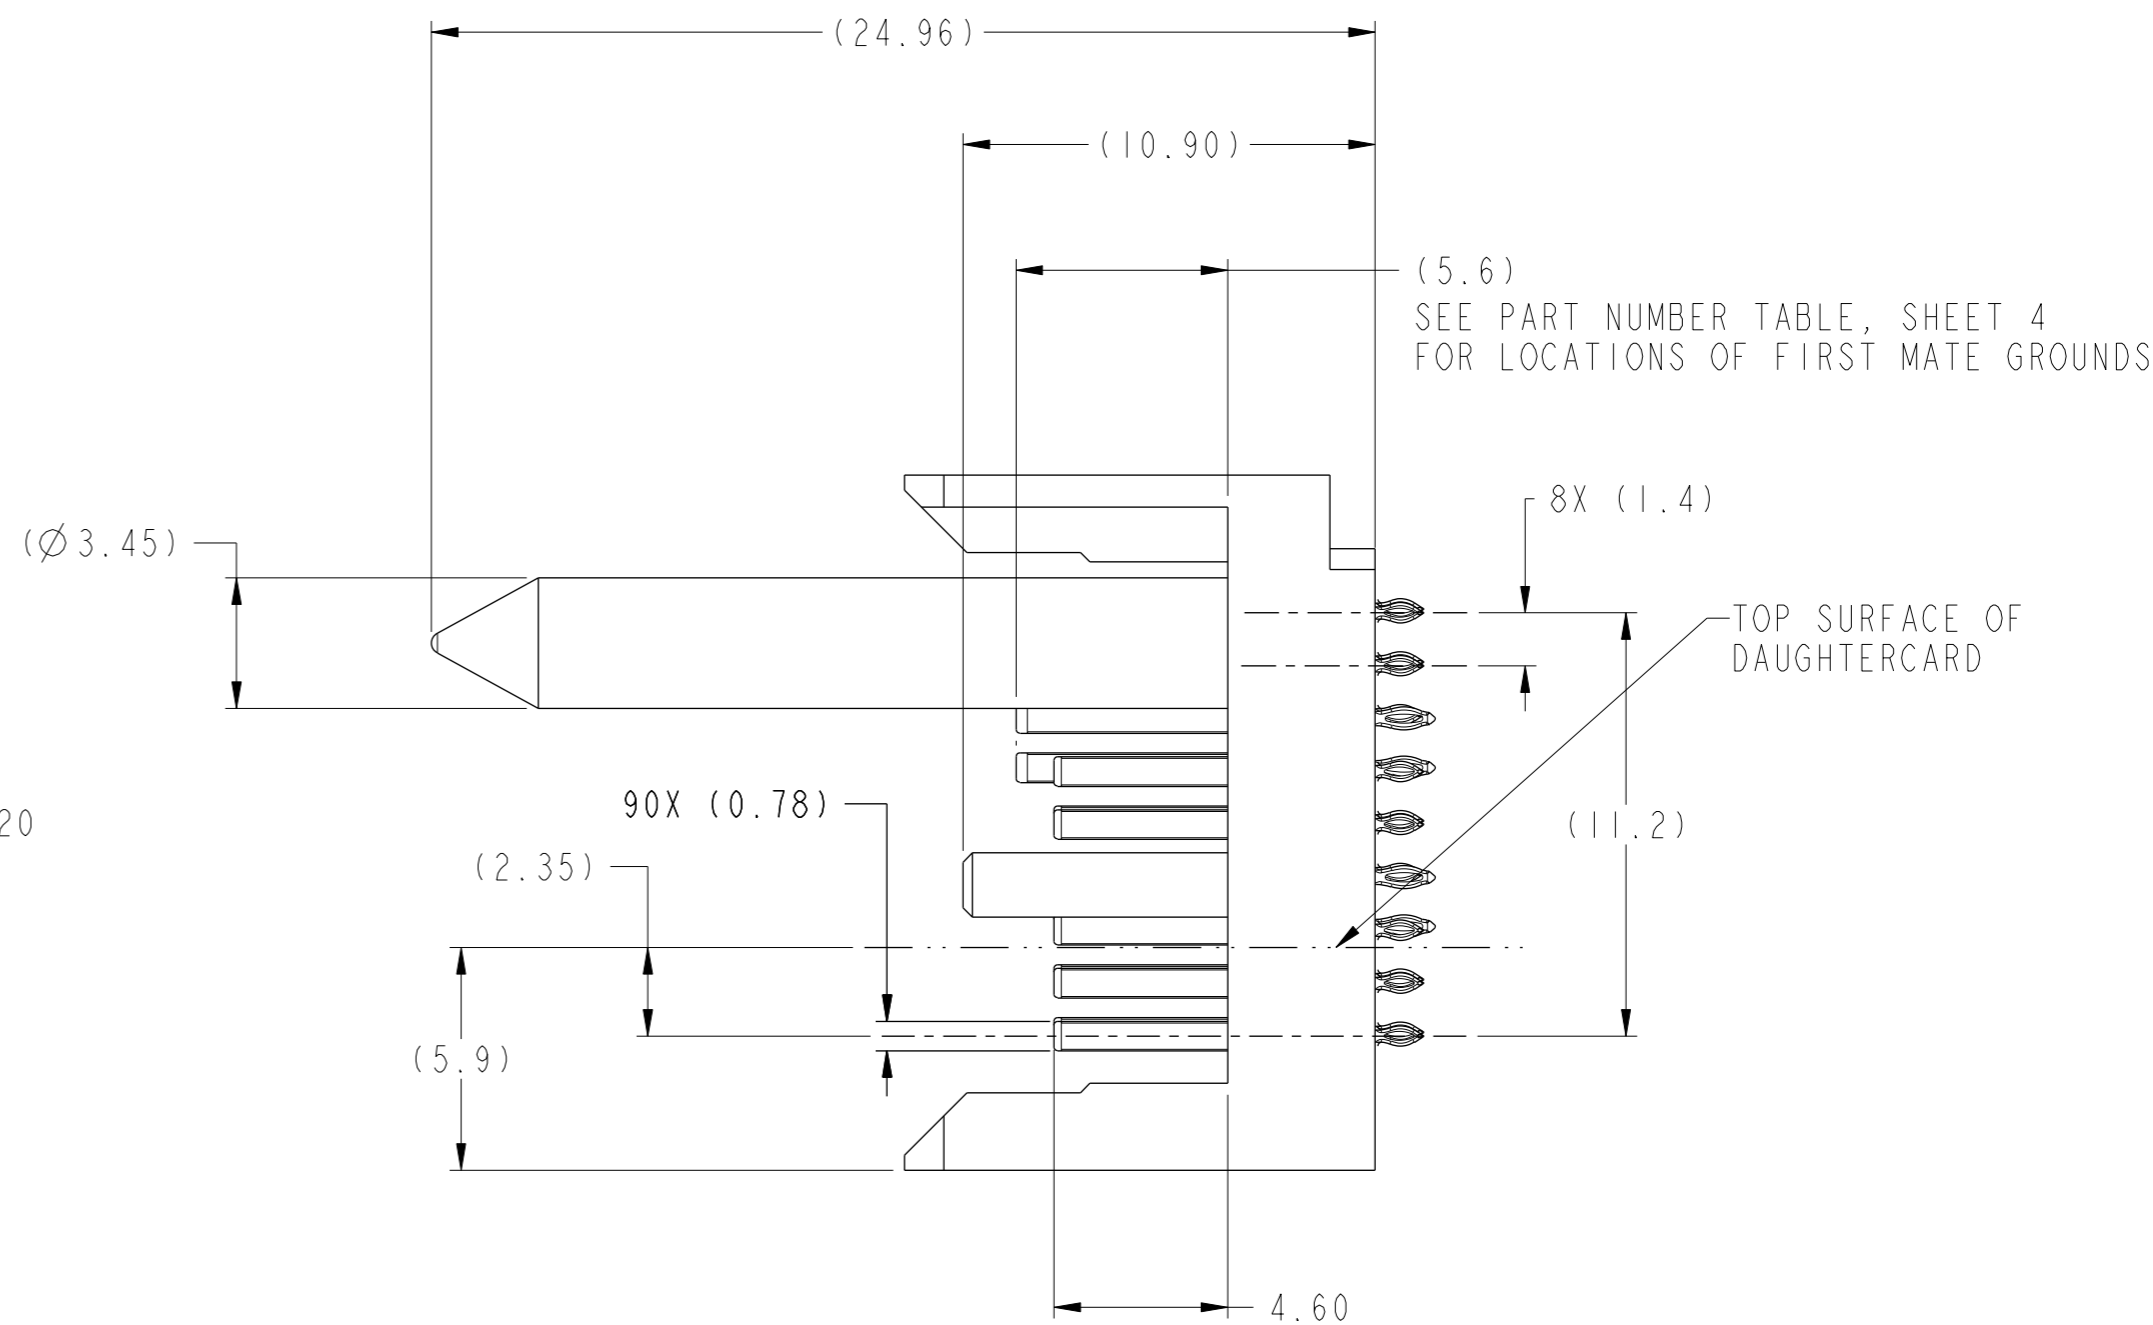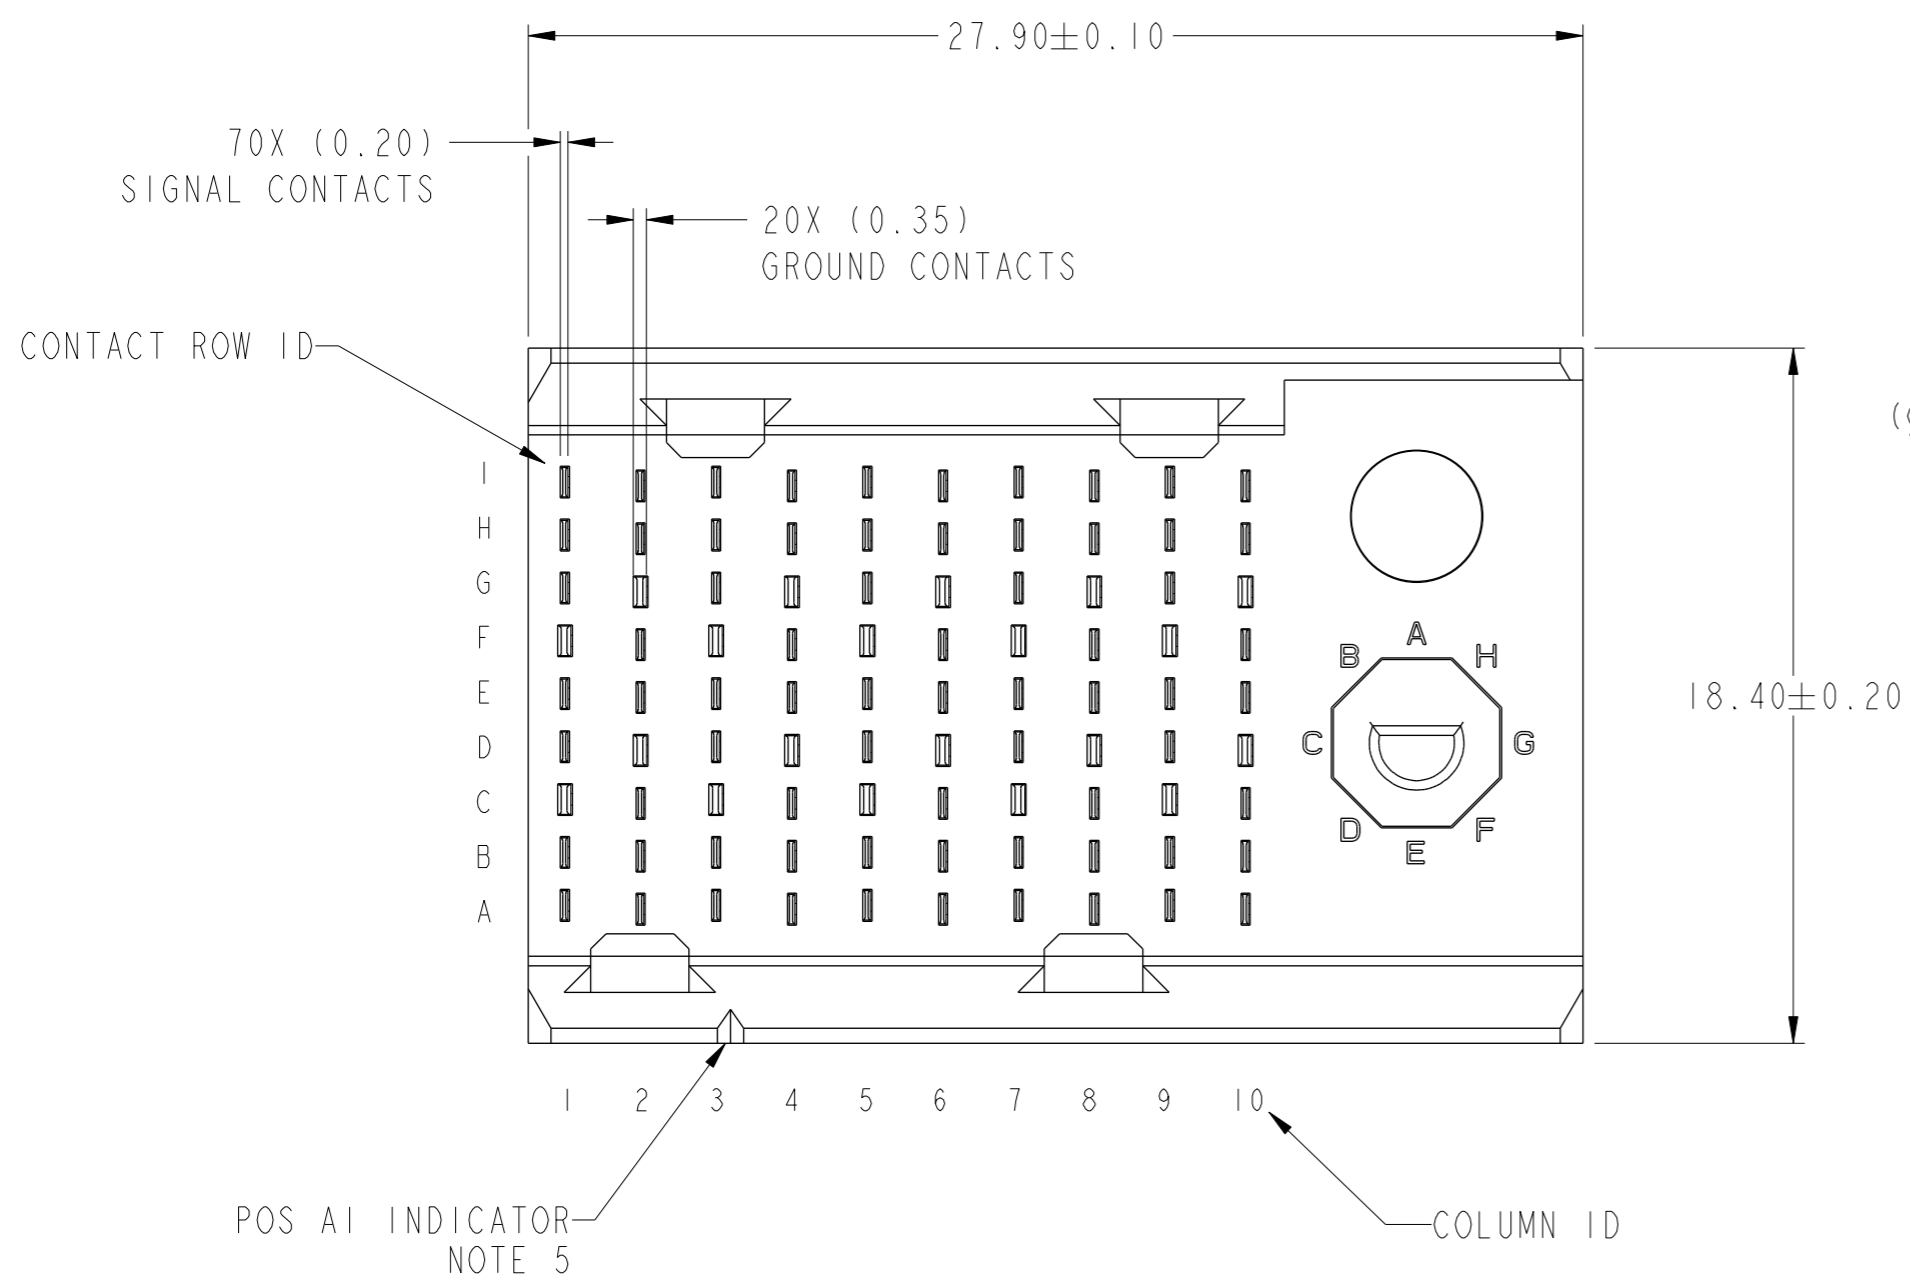

RECOMMENDED PCB DETAILS
SCALE 5:1





spec ref	-	dr	Jeny Ren	2015/05/29	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	2016/03/14	chr	-	ecn no	-	rel level	Preliminary
surface	-	appr	-	-	product family	AIRMAX VS2	part no	10135271	rev	1
ASME Y14.5	linear	0.X	±0.3	Amphenol FCI	title	AIRMAX VSE VERTICAL HEADER	cat. no.	-	Product - Customer Drw	sheet 2 of 4
	angular	0°	±2°			PRESS-FIT, 3-PAIR, 90POS, W/G				

PRELIMINARY

Amphenol FCI

© 2016 AFCI

LEFT POLARIZING WITH GUIDE

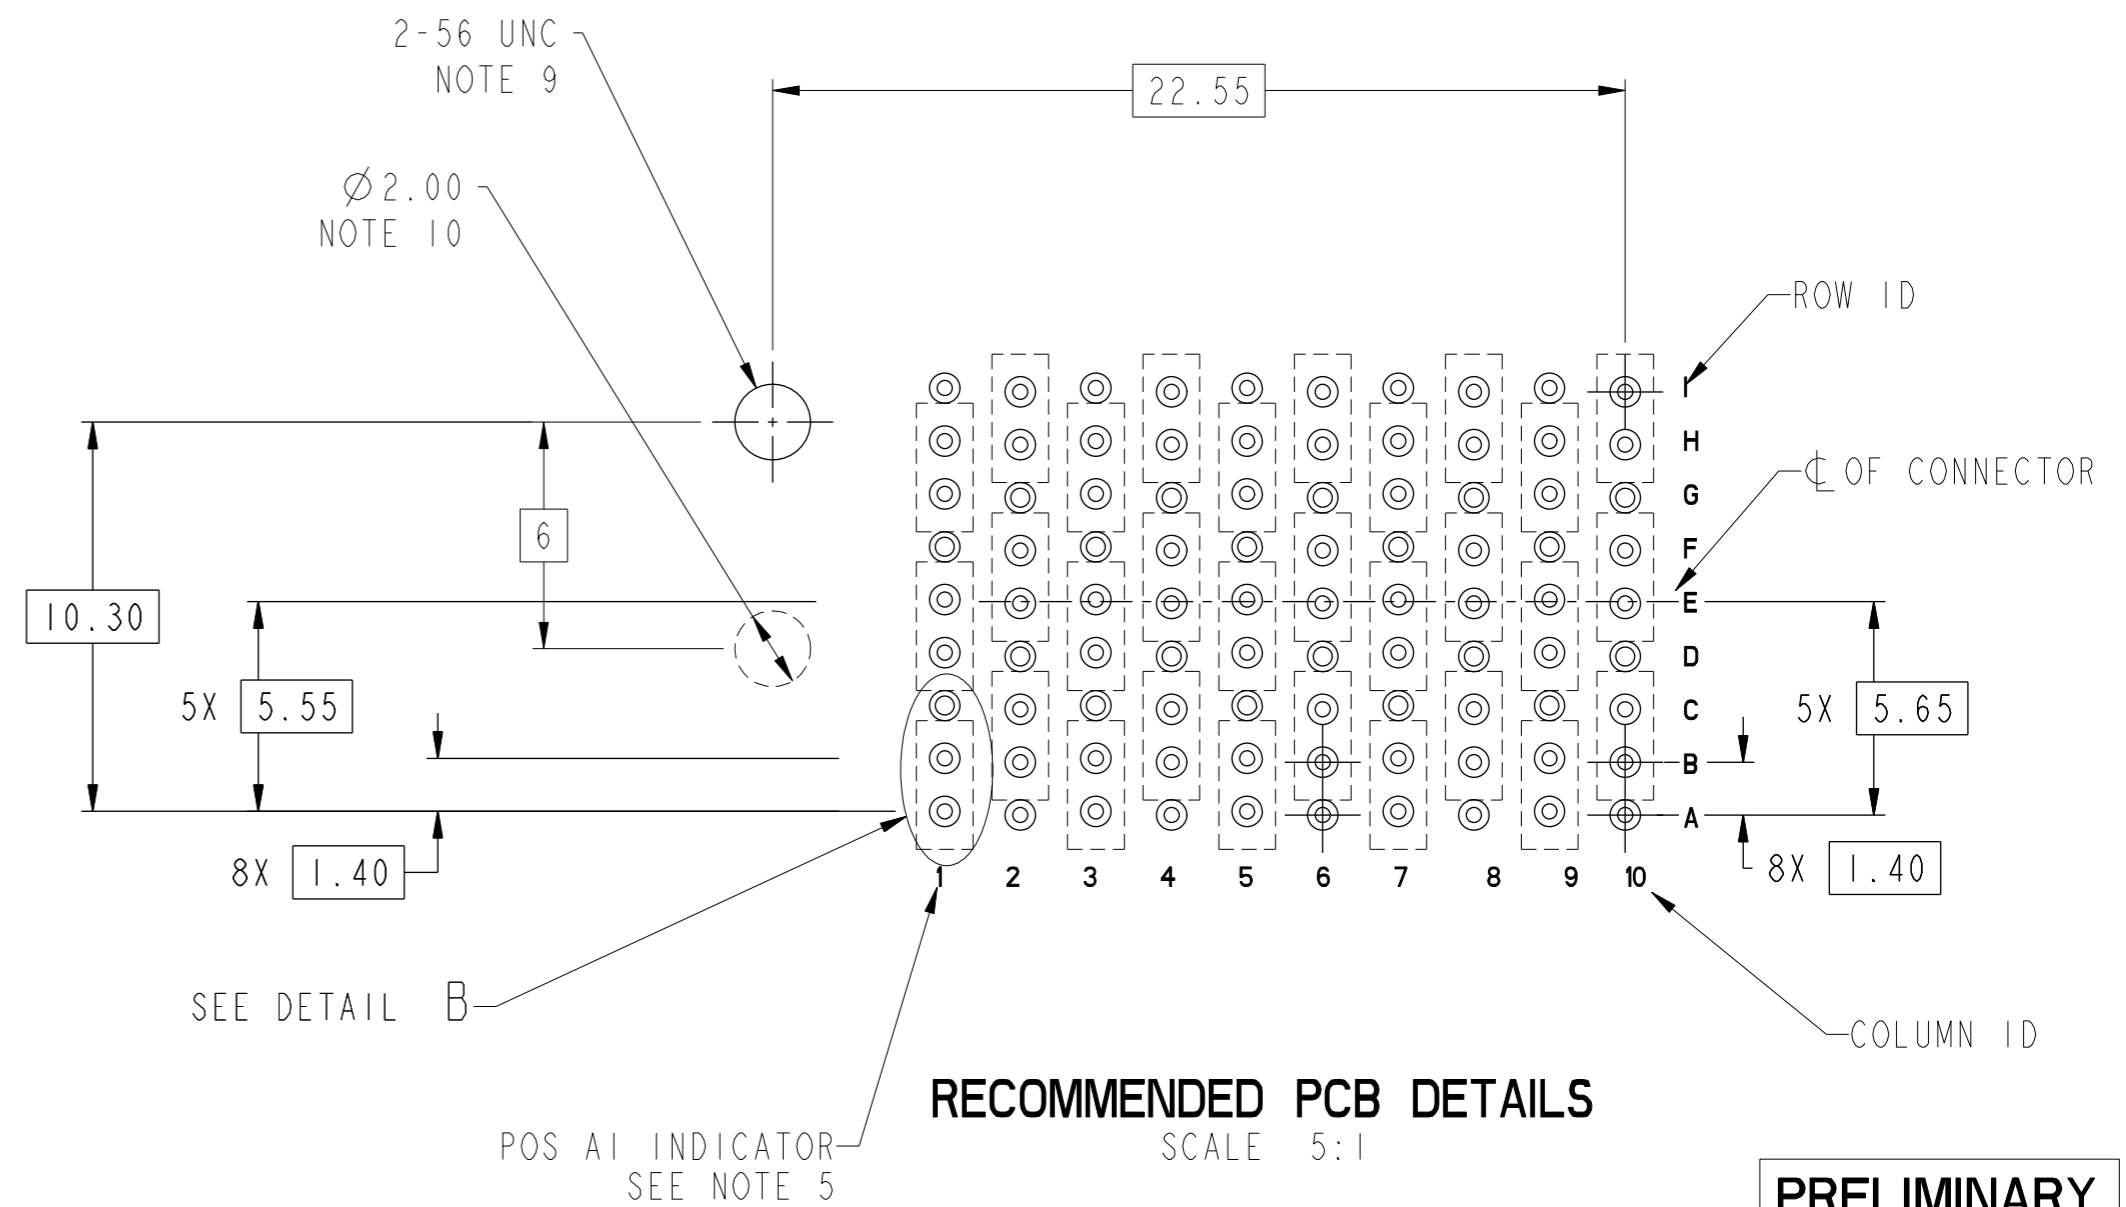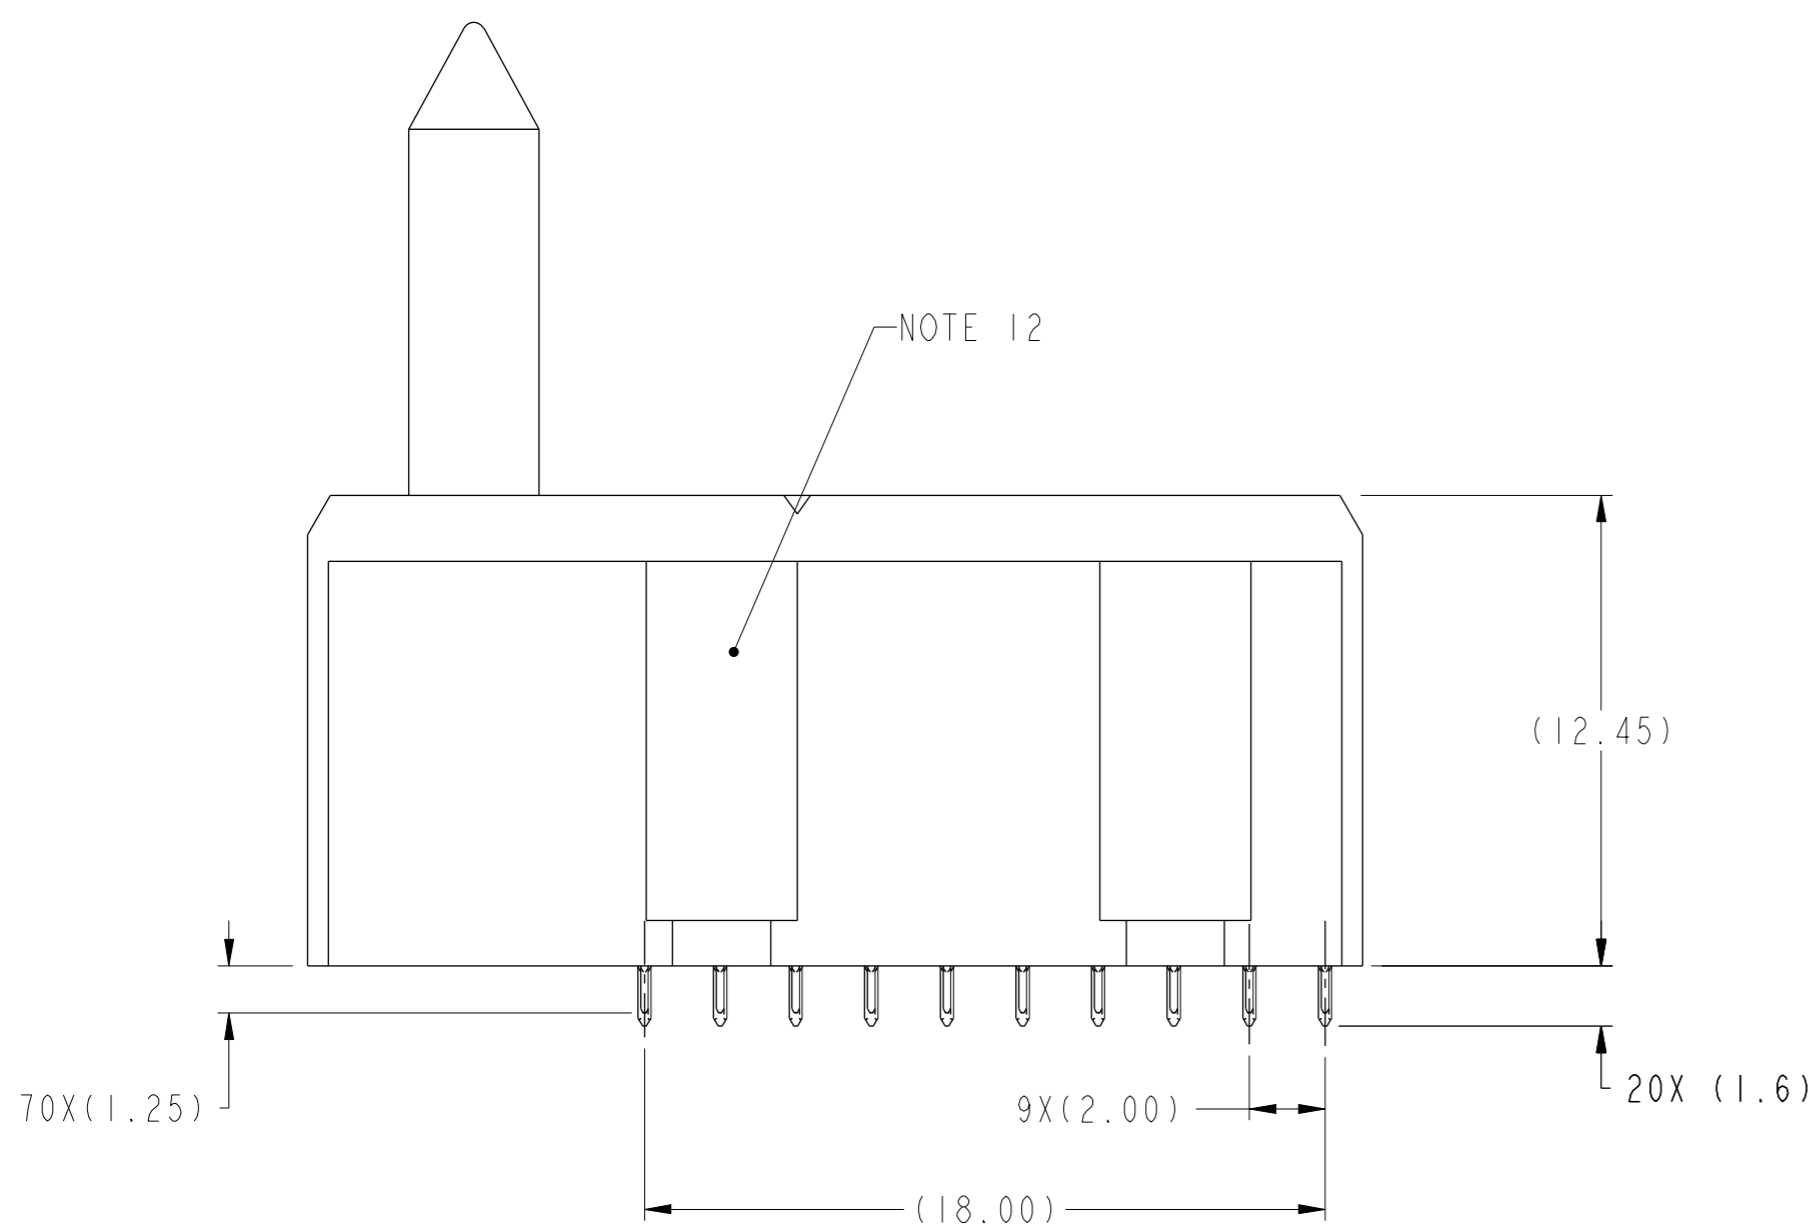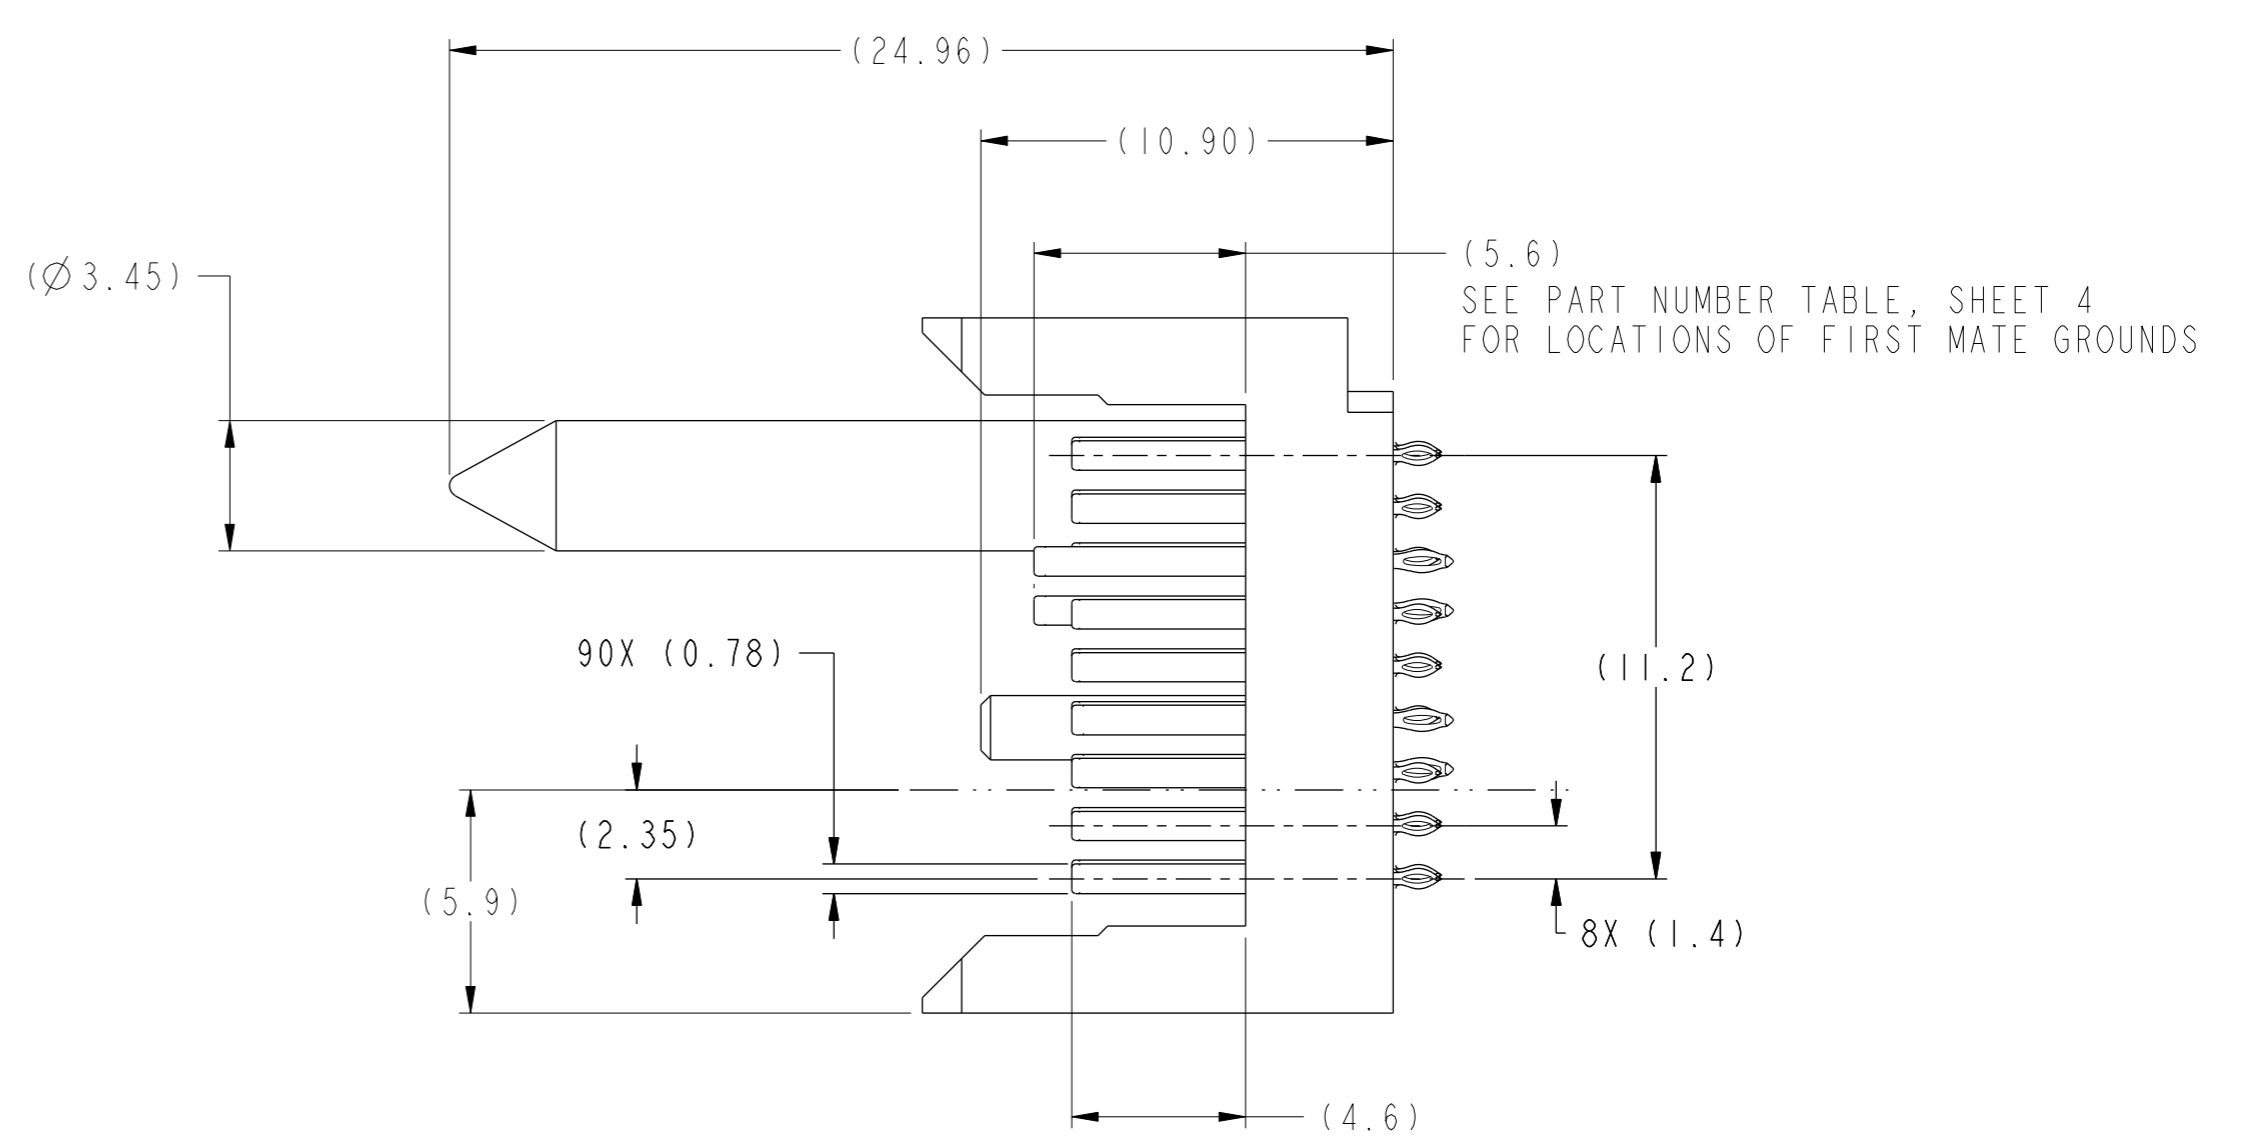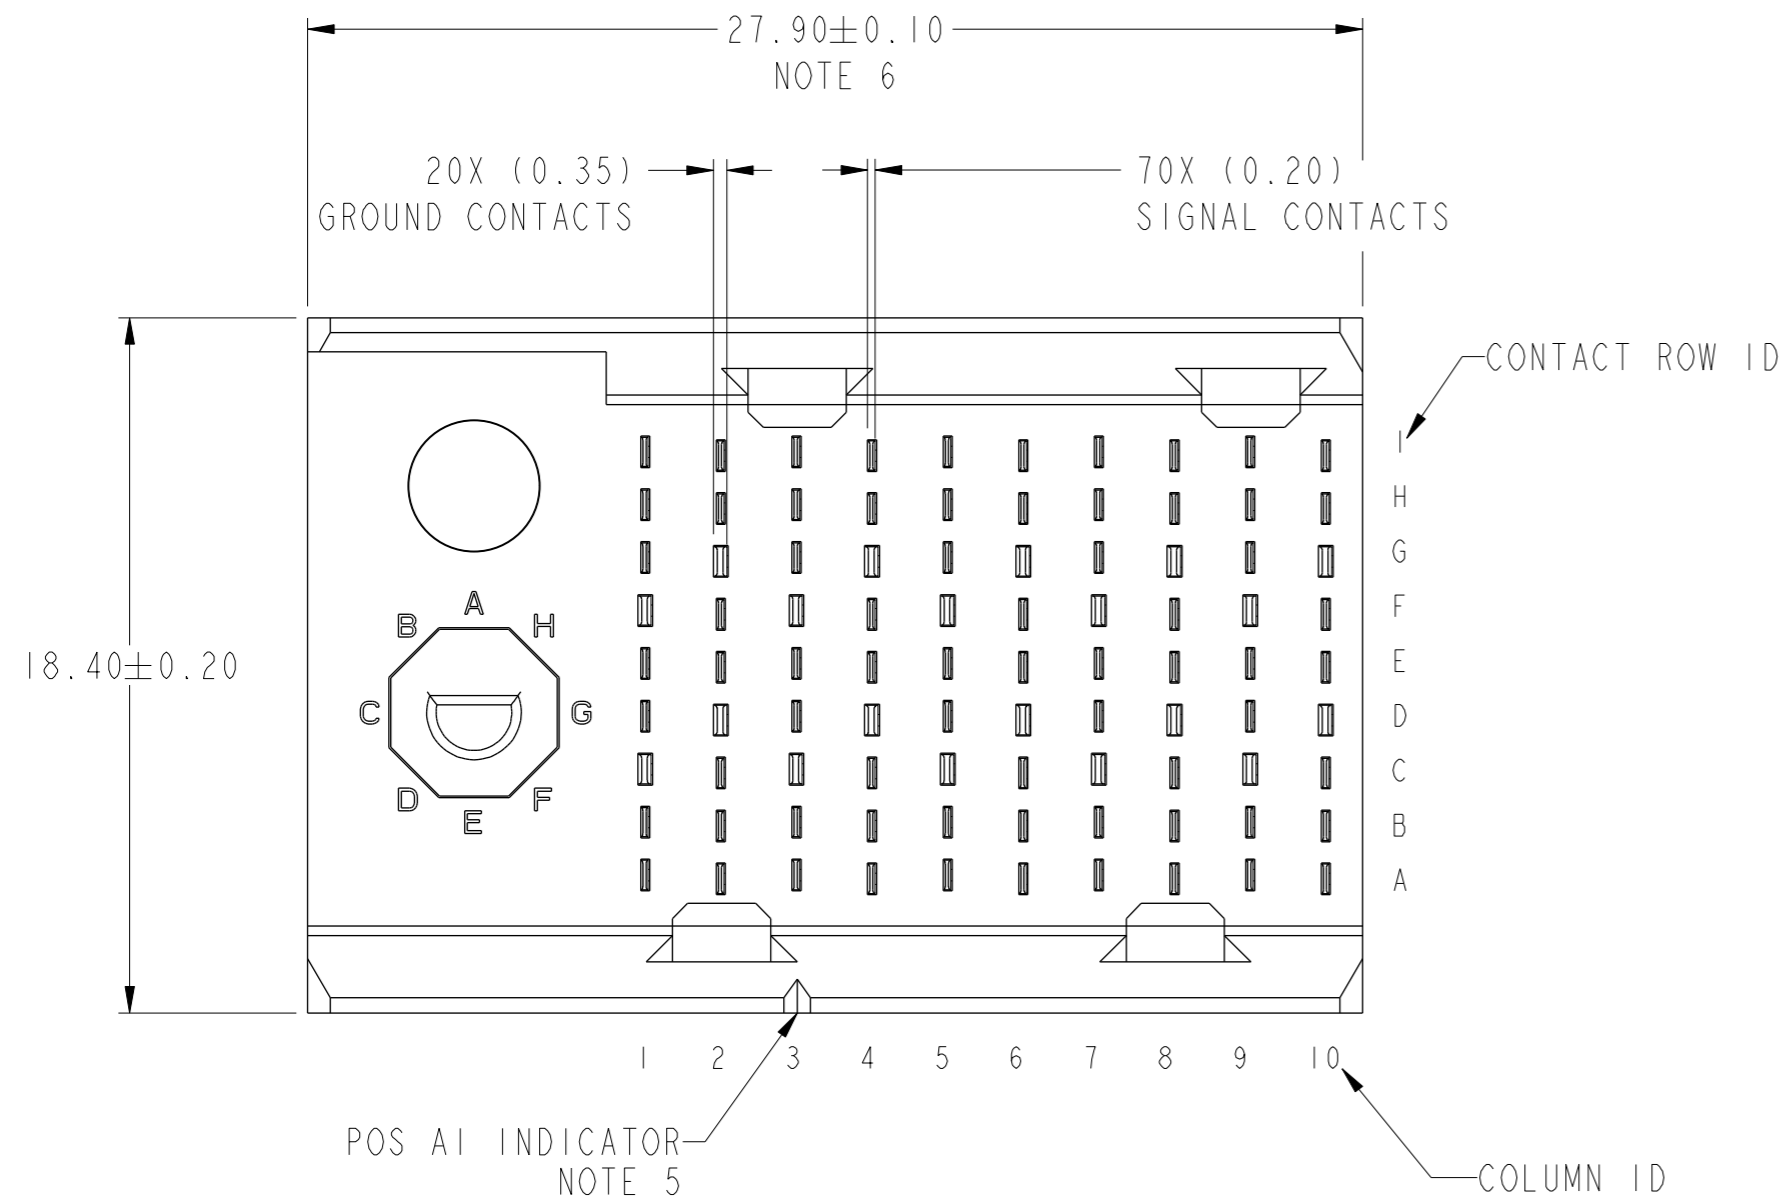

RECOMMENDED PCB DETAILS
SCALE 5:1

PRELIMINARY

spec ref	-	dr	Jeny Ren	20150529	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	20160314	chr	-	ecn no	-	rel level	Preliminary
TOLERANCES UNLESS OTHERWISE SPECIFIED		app	-	-	product family	AIRMAX VS2	cat. no.	-	Product - Customer Drw	sheet 3 of 4
surface	-	linear	0.X	± 0.3	Amphenol FCI	AIRMAX VSE VERTICAL HEADER	dwg no	10135271	rev	1
			0.XX	± 0.15		PRESS-FIT, 3-PAIR, 90POS, W/G				
			0.XXX	± 0.050						
		angular	0°	$\pm 2^\circ$						


Amphenol FCI

© 2016 APCI


PART NUMBER	PRESS-FIT TAIL PLATING TYPE	FIRST MATE PIN LOCATIONS
10135271-10*LF	TIN OVER NICKEL (LEAD FREE)	F1, F3, F5, F7, F9 G2, G4, G6, G8, G10

NOTES:


- CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0
CONTACT: COPPER ALLOY
- CONTACT PLATING:
SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-0956 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
PRESS-FIT TAILS: SEE TABLE
- PRODUCT SPECIFICATION: GS-12-239.
- APPLICATION SPECIFICATION: GS-20-035.
- CONNECTOR OUTLINE WITH HOUSING POS A1 INDICATOR MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- REFER TO CUSTOMER DRAWING 10104444 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- THE SCREW THREAD ON THE CONNECTOR IS 2-56 UNC -2B TAP 8.60 MM, #50 DRILL (1.778) TAP 8.80 MM.
- NO CIRCUIT IN THIS AREA SURFACE.
- GROUND VIAS IN POSITIONS C, F FOR ODD COLUMNS AND POSITIONS D, G FOR EVEN COLUMNS REQUIRE (Ø0.50) FINISHED HOLES. ALL OTHER VIAS REQUIRE (Ø0.40) FINISHED HOLES.
- PRODUCT MARKING, (PROTOTYPE, PART NUMBER & LOT CODE), ON THIS SURFACE.

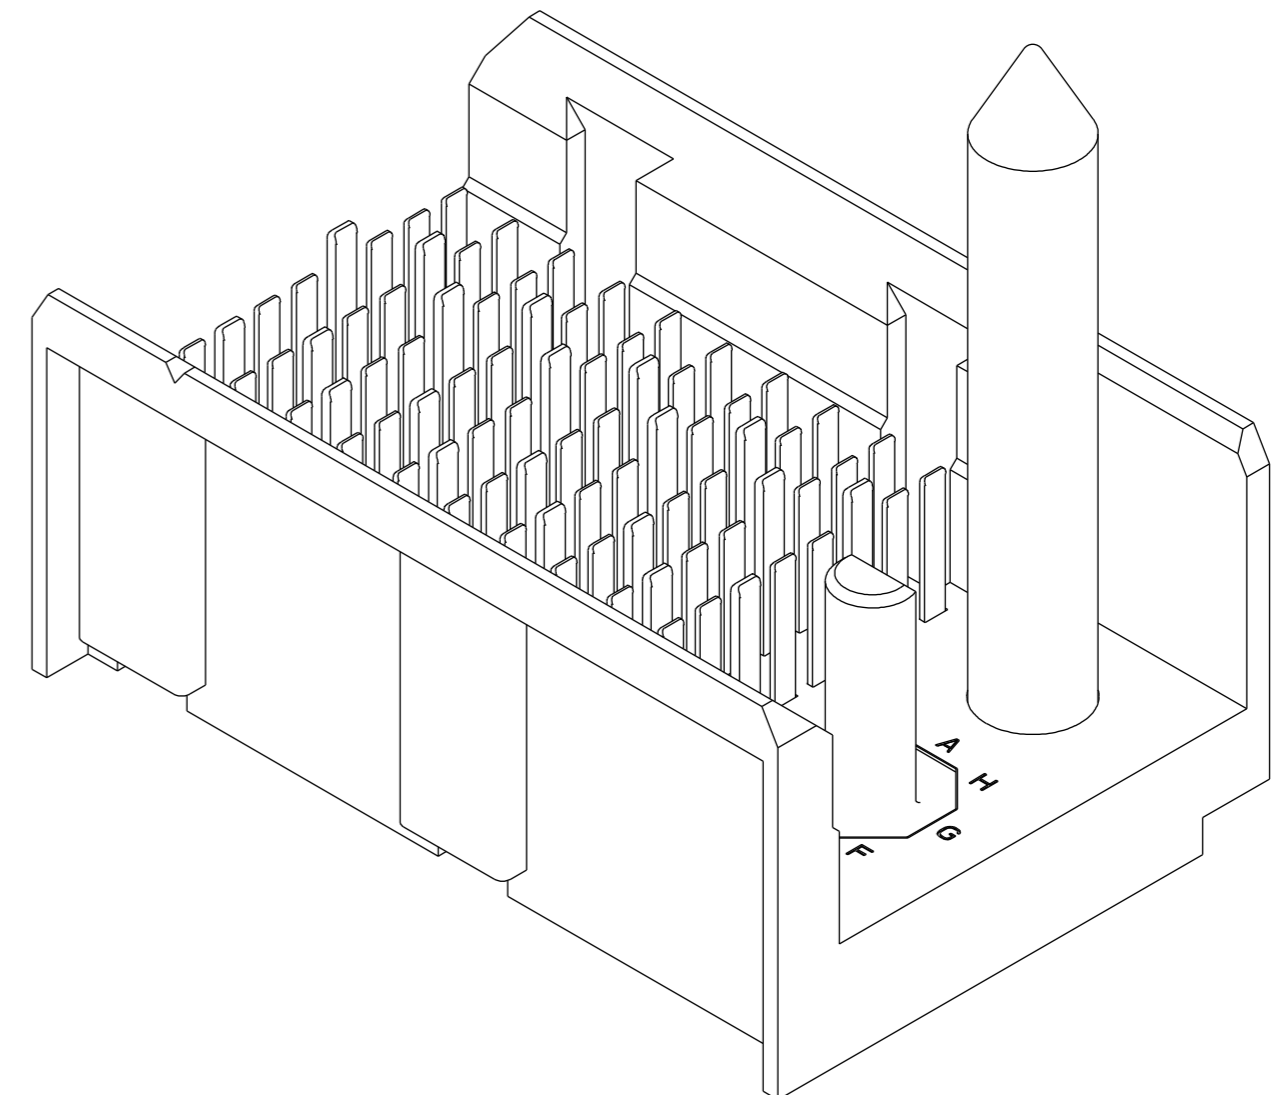

10135271-10PLF

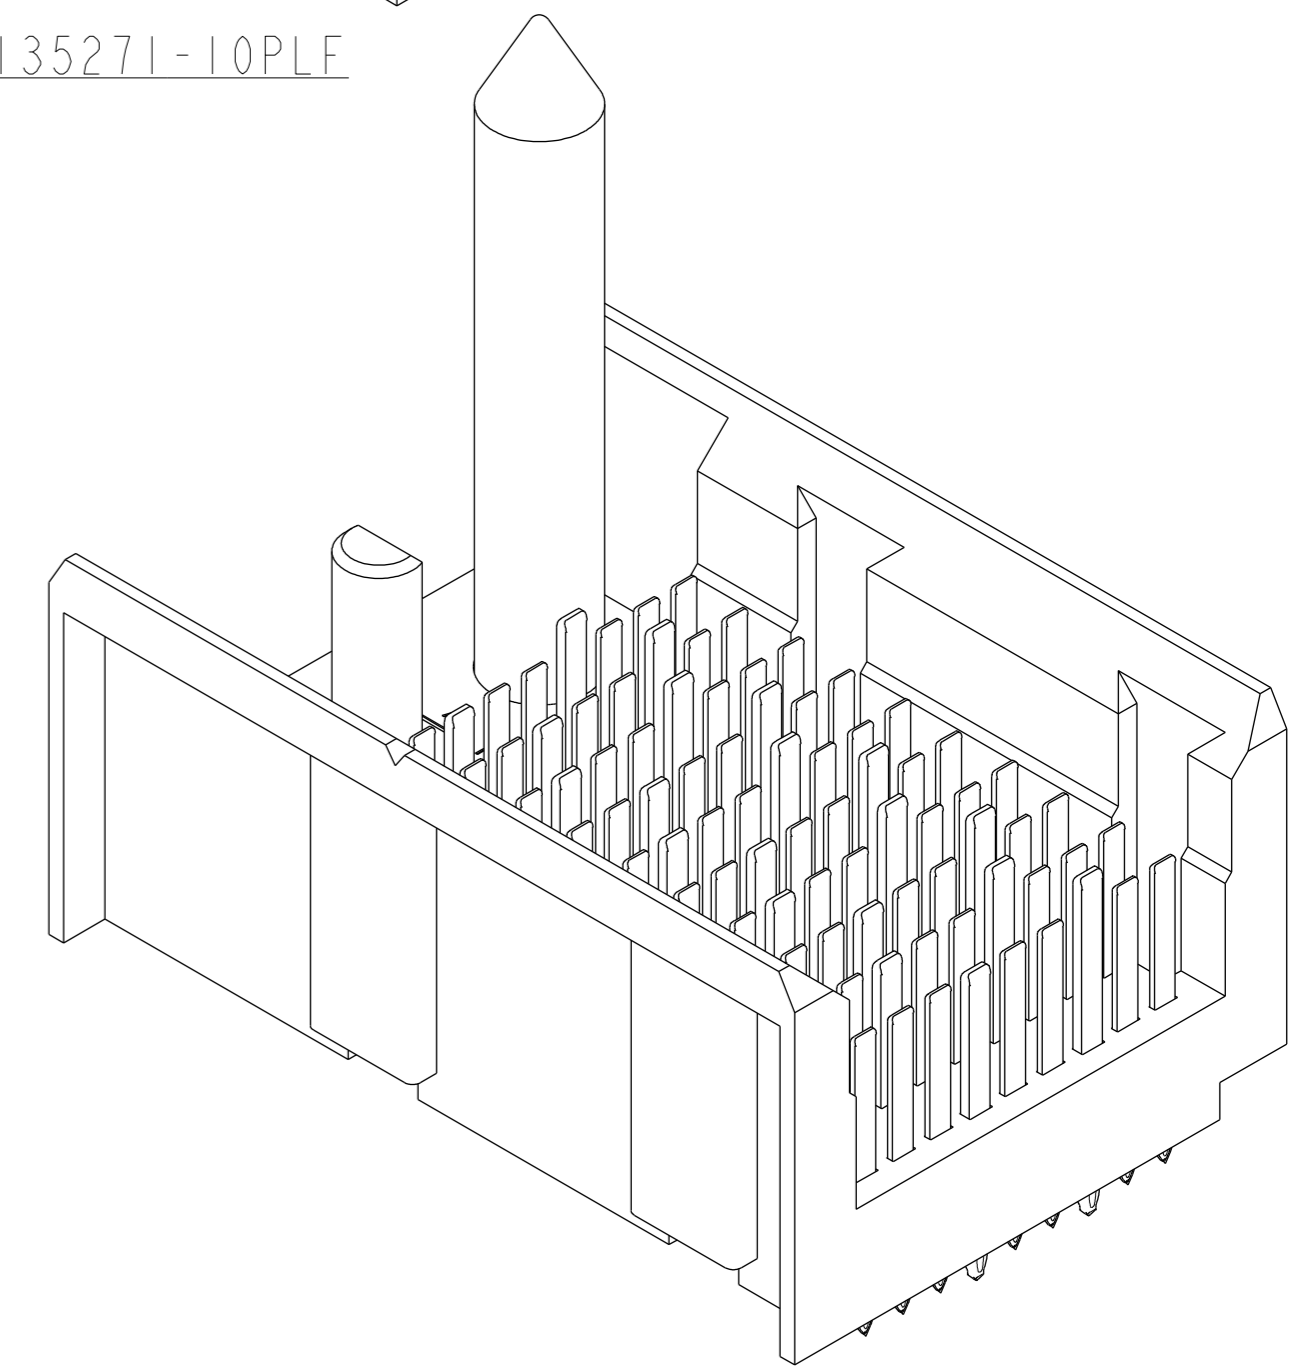

10135271-10ALF

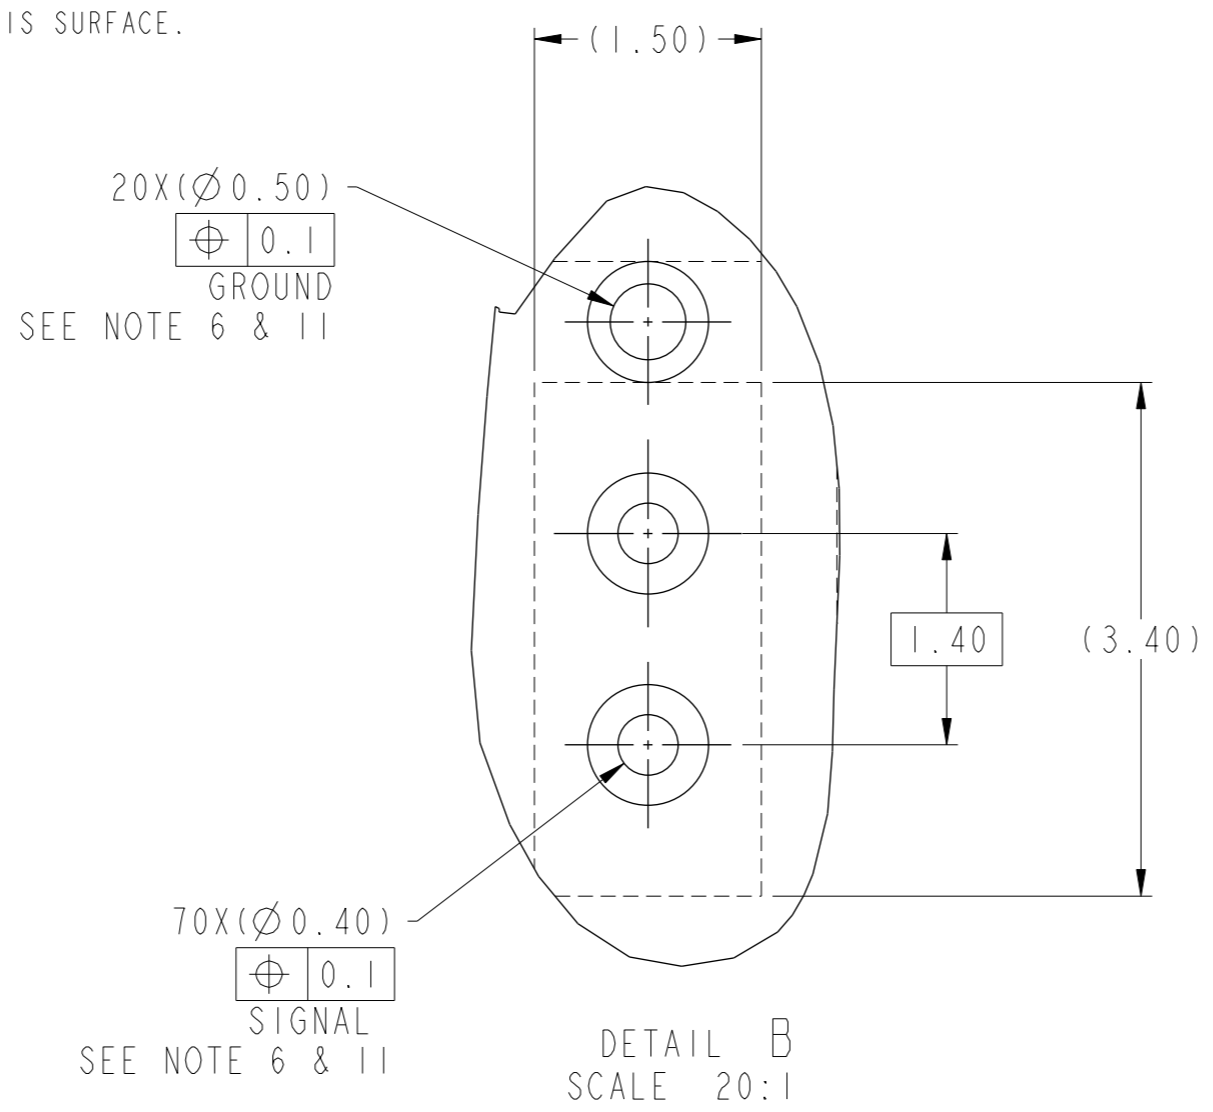

DETAIL B
SCALE 20:1

PRELIMINARY

spec ref	-	dr	Jeny Ren	20150529	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5	eng	Tao Zhan	20160314			ecn no	-	rel level	Preliminary
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	product family			AIRMAX VS2			
surface	-	appr	-	Amphenol FCI		title	AIRMAX VSE VERTICAL HEADER		cat. no.	10135271
ASME Y14.5	linear	0.X	±0.3	0.XX	±0.15	0.XXX	±0.050	angular	0°	±2°
Product - Customer Drw							rev	1	sheet 4 of 4	

Amphenol FCI

© 2016 AFCI