



Wire Connector with control wire tap; for 2 cables; 3 pcs.; incl. Terminal Cover Extended with probe holes for voltage test; accessory for: 3VA6 150/250 Plug-in/Draw-out Base 3VA6 150/250

Model	
product brand name	SETRON
product designation	accessories
Accessories	Wire connector
General technical data	
designation / of the terminal	TA2.3
Connections according IEC	
connectable conductor cross-section	
• for copper cable / stranded / minimum	25 mm ²
• for copper cable / stranded / maximum	150 mm ²
• for aluminum cable / stranded / minimum	25 mm ²
• for aluminum cable / stranded / maximum	150 mm ²
stripped length	25 / 50 mm
tightening torque / when using copper cables	
• stranded	31
• finely stranded	31
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	1.0 / 2.0 in
connectable conductor cross-section	
• for copper cable / stranded / minimum	4 AWG
• for copper cable / stranded / maximum	300 kcmil
• for copper cable / finely stranded / minimum	4 AWG
• for copper cable / finely stranded / maximum	300 kcmil
• for aluminum cable / stranded / minimum	4 AWG
• for aluminum cable / stranded / maximum	300 kcmil
tightening torque / when using copper cables	
• stranded	275 lb-in
• finely stranded	275 lb-in

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9243-0JC28>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9243-0JC28>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9243-0JC28

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

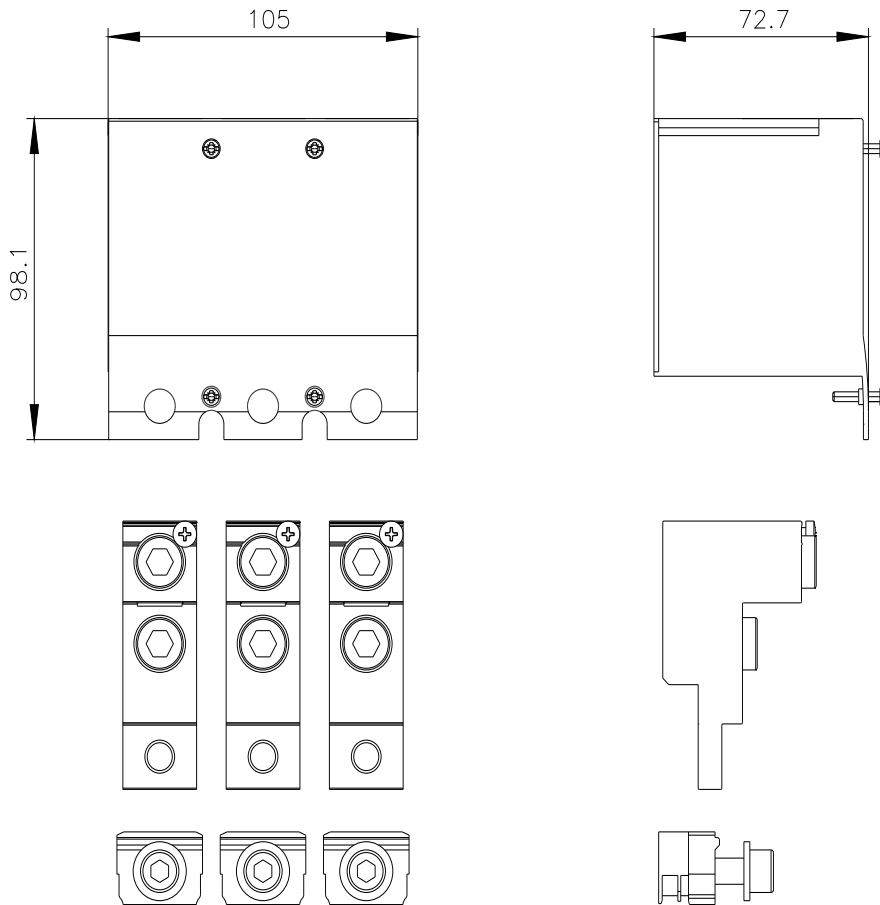

last modified:

7/5/2022 

