


Connector Location A


Connector Location B

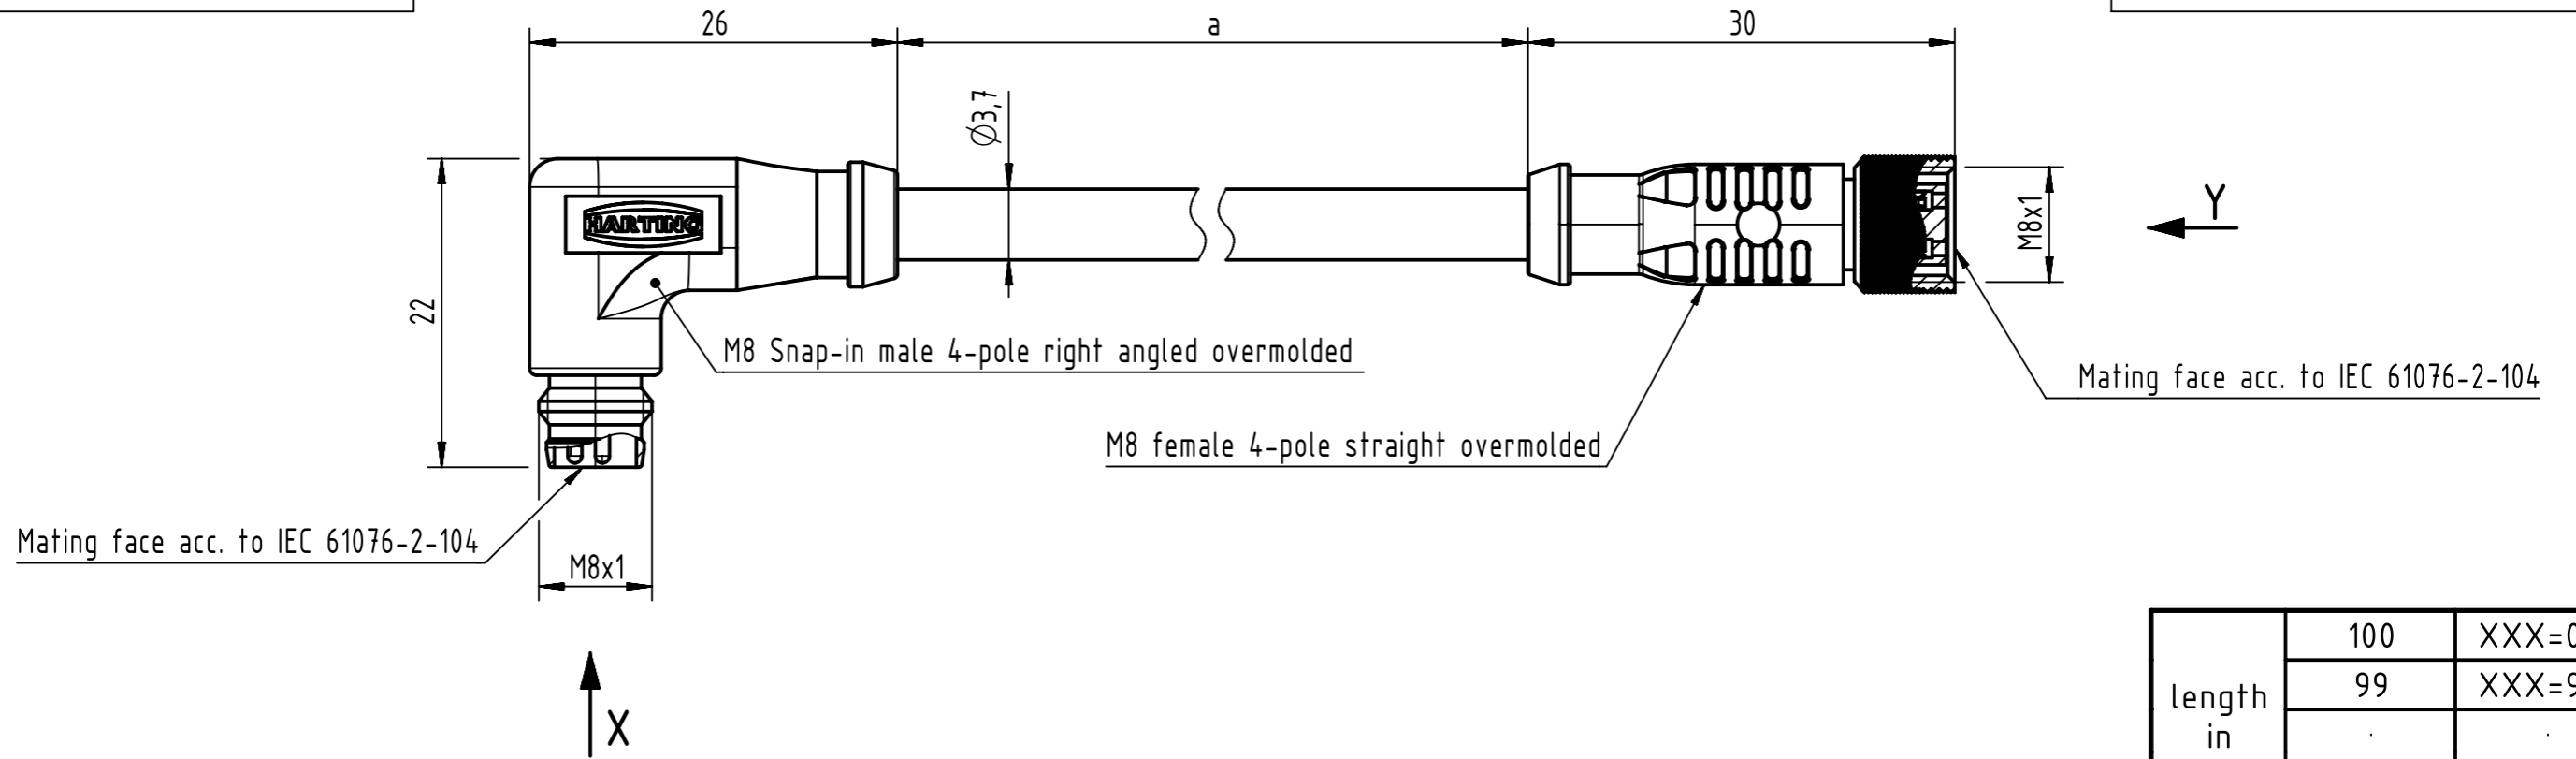


X

Y

Loading-Plan:



- 1 — Brown — 1
- 2 — White — 2
- 3 — Blue — 3
- 4 — Black — 4



| | | |
|-----------------------|-------|---------|
| length in "1m" step | 100 | XXX=000 |
| | 99 | XXX=990 |
| | ... | ... |
| | 12 | XXX=120 |
| | 11 | XXX=110 |
| length in "0.1m" step | 10 | XXX=100 |
| | 9.9 | XXX=099 |
| | 9.8 | XXX=098 |
| | ... | ... |
| | 0.5 | XXX=005 |
| | 0.4 | XXX=004 |
| | 0.3 | XXX=003 |
| | 0.2 | XXX=002 |
| Step | a [m] | XXX |

| | |
|------------|-----------|
| 6.0 to 100 | ±1% |
| 0.6 to 5.9 | +0.04 |
| 0.2 to 0.5 | +0.02 |
| a [m] | Tolerance |

| | |
|------------------------------------|----------------|
| 4x0.25mm ² , PUR, black | 2136D3D5428XXX |
| Type of cable | Part no. |

- Protection level: IP 65
- Temperature range: -40°C...+85°C

| | | | | | | | | | |
|---|--|-----------------------------------|--|-------------------------------------|--|--|--|---------------------------------|--|
| | | All Dimensions in mm | | Tech. Character. | | Free size tol. | | According to production drawing | |
| All rights reserved Department HCS - RO | | Created by MUNTEANV Muntean | | Inspected by MUNTEANV Muntean | | Standardisation MUNTEANV Muntean | | Date 2018-06-08 | |
| HARTING Customised Solutions D-32339 Espelkamp | | Title M8 Cable Assembly | | State Final Release | | Doc-Key / ECM-Nr. 100710201/UGD/000/C 500000136135 | | Rev. C | |
| | | Type TB | | Number 2136D3D5428XXX | | Page 1/1 | | | |