

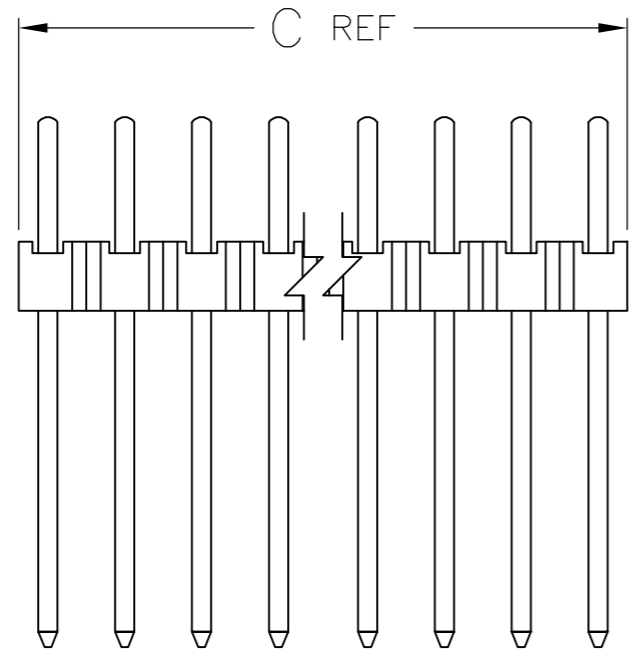
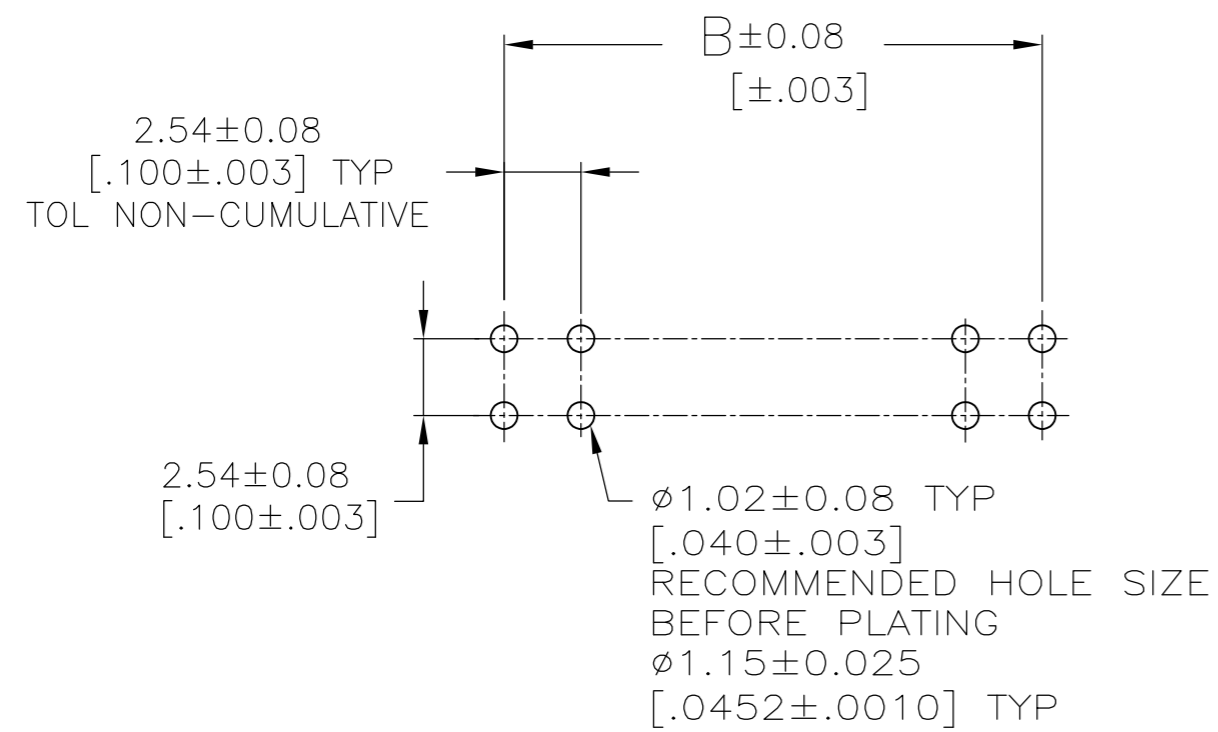


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
AD	00	D	REVISED PER	ECO-14-000264	12JUL2014	NK	MM	

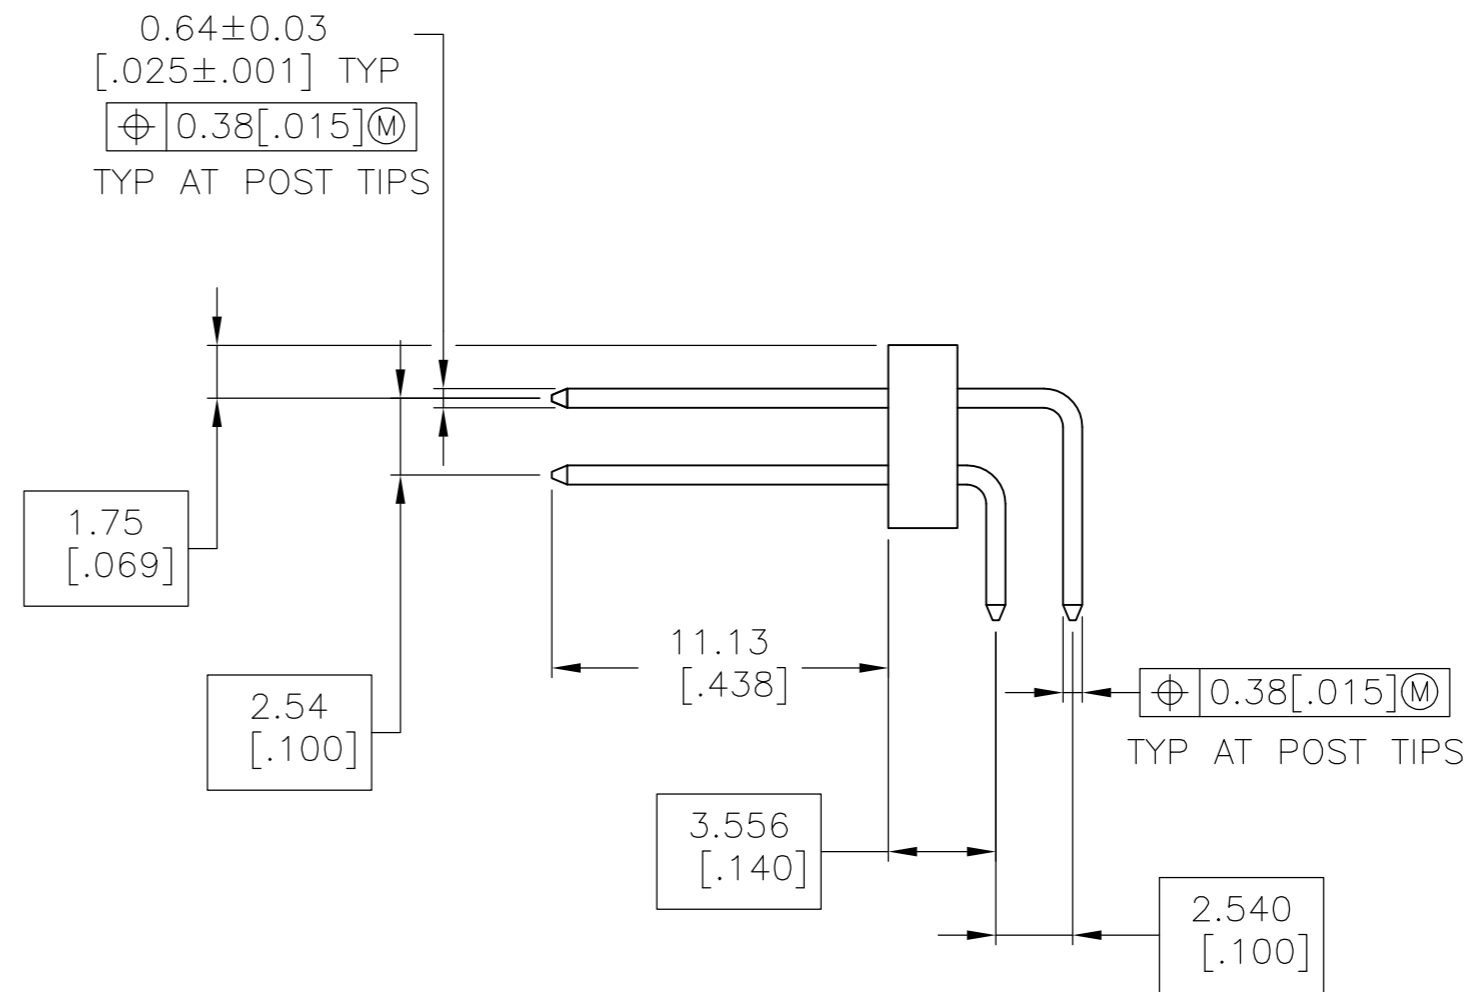

- 1 ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK.
- 4 POSTS: COPPER ALLOY.
- 5 POSTS: 0.00254-0.00508 [.000100-.000200] BRIGHT TIN OVER 0.00127 [.000050] NICKEL.
- 6 POSTS: 0.00254-0.00508 [.000100-.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION.

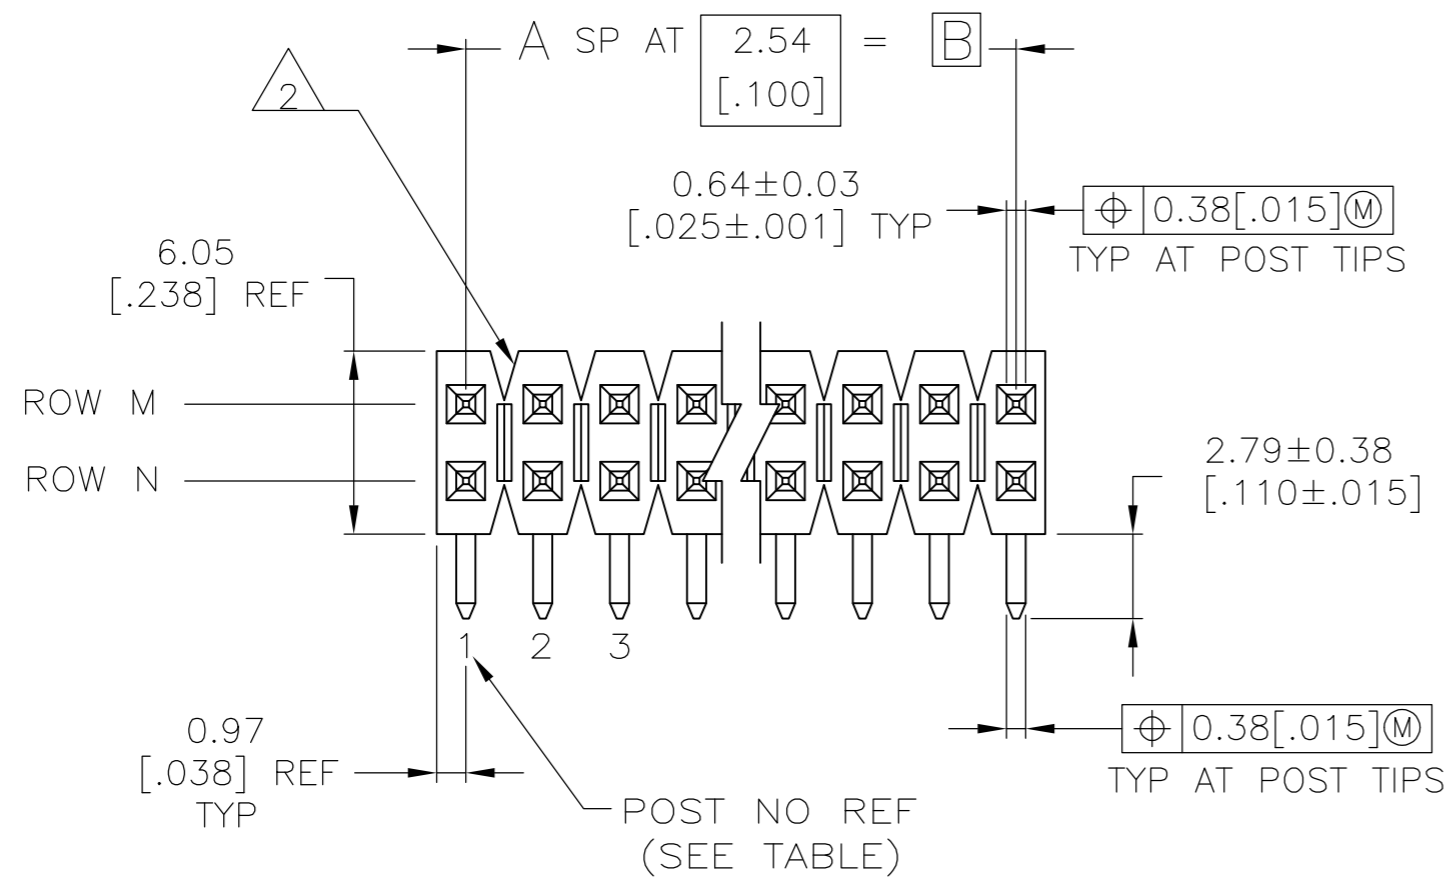

RECOMMENDED HOLE LAYOUT

7	6	1,2,17,18	NONE	45.11 [1.776]	43.18 [1.700]	17	36	5-147111-1
	5	1,2,17,18	NONE	45.11 [1.776]	43.18 [1.700]	17	36	147111-1
REMARKS	PLATING	ROW N	ROW M	C	B	A	NO OF POSN	PART NUMBER
		HOLD DOWN POST CONFIG LOCATION						

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	200CT98		
		B. HAYMAKER	200CT98		
DIMENSIONS: mm [INCHES]		CHK	200CT98	NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100 CL, RIGHT ANGLE, .025 SQUARE POSTS WITH HOLD DOWN CONFIGURATIONS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J. GESFORD	200CT98		
0 PLC ± -		APVD	200CT98	SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C=147111 -	
1 PLC ± -		J. GESFORD	200CT98		
2 PLC ± -		PRODUCT SPEC		SCALE 4:1 SHEET 1 OF 1 REV D	
3 PLC ± 0.13 [.005]		APPLICATION SPEC			
4 PLC ± -				CUSTOMER DRAWING	
ANGLES ± -					
FINISH		WEIGHT	-		
SEE TABLE					