

## NV5032SB

Voltage Controlled Crystal Oscillator (VCXO)

### Main Application

For communication equipment for ISDN, SDH/SONET, WiMAX, etc. and Base-stations

### Features

- A small ceramics-package.(Dimensions : 5.0×3.2mm)
- Output Specification : CMOS
- Frequency range : 25MHz to 40MHz
- Low current consumption : Max. 10mA




Pb Free

RoHS Compliant  
Directive 2011/65/EU  
Directive (EU) 2015/863

### Specifications

Item	Model	NV5032SB
Nominal Frequency Range (MHz)		25 to 40
Standard Frequency (MHz)		25, 30.72, 38.4, 40
Supply Voltage [V <sub>CC</sub> ] (V)		+3.3 ±10 %
Current Consumption (mA)		Max. 10
Output Specification		CMOS
Symmetry (%)		45 to 55 (1/2 V <sub>CC</sub> )
Output Load Condition (pF)		15
Operating Temperature Range (°C)		-40 to +85
Storage Temperature Range (°C)		-55 to +125
Overall Frequency Tolerance		Max. ±50 × 10 <sup>-6</sup>
Frequency Control Range / Control Voltage [ V <sub>cont</sub> ]		Min. ±100 × 10 <sup>-6</sup> / +1.65 ± 1.65 V
Frequency Change Polarity		Positive
Specification Number		NSA3550A

### Dimensions

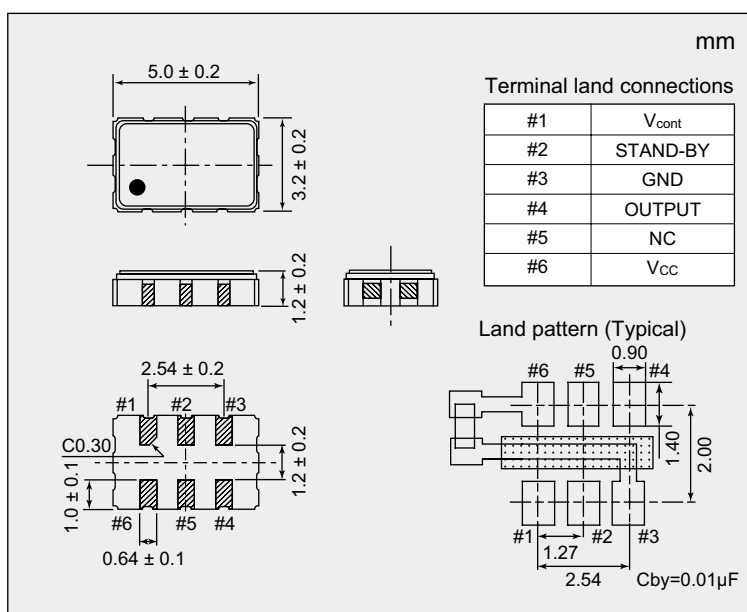

### List of Stand-by function

Input (#2)	Output (#4)
High Level ( Min. 0.7 V <sub>CC</sub> ) or OPEN	Output
Low Level ( Max. 0.3 V <sub>CC</sub> )	Hi-Impedance

Please specify the model name, frequency, and specification number when you order products.  
For further questions regarding specifications, please feel free to contact us.