

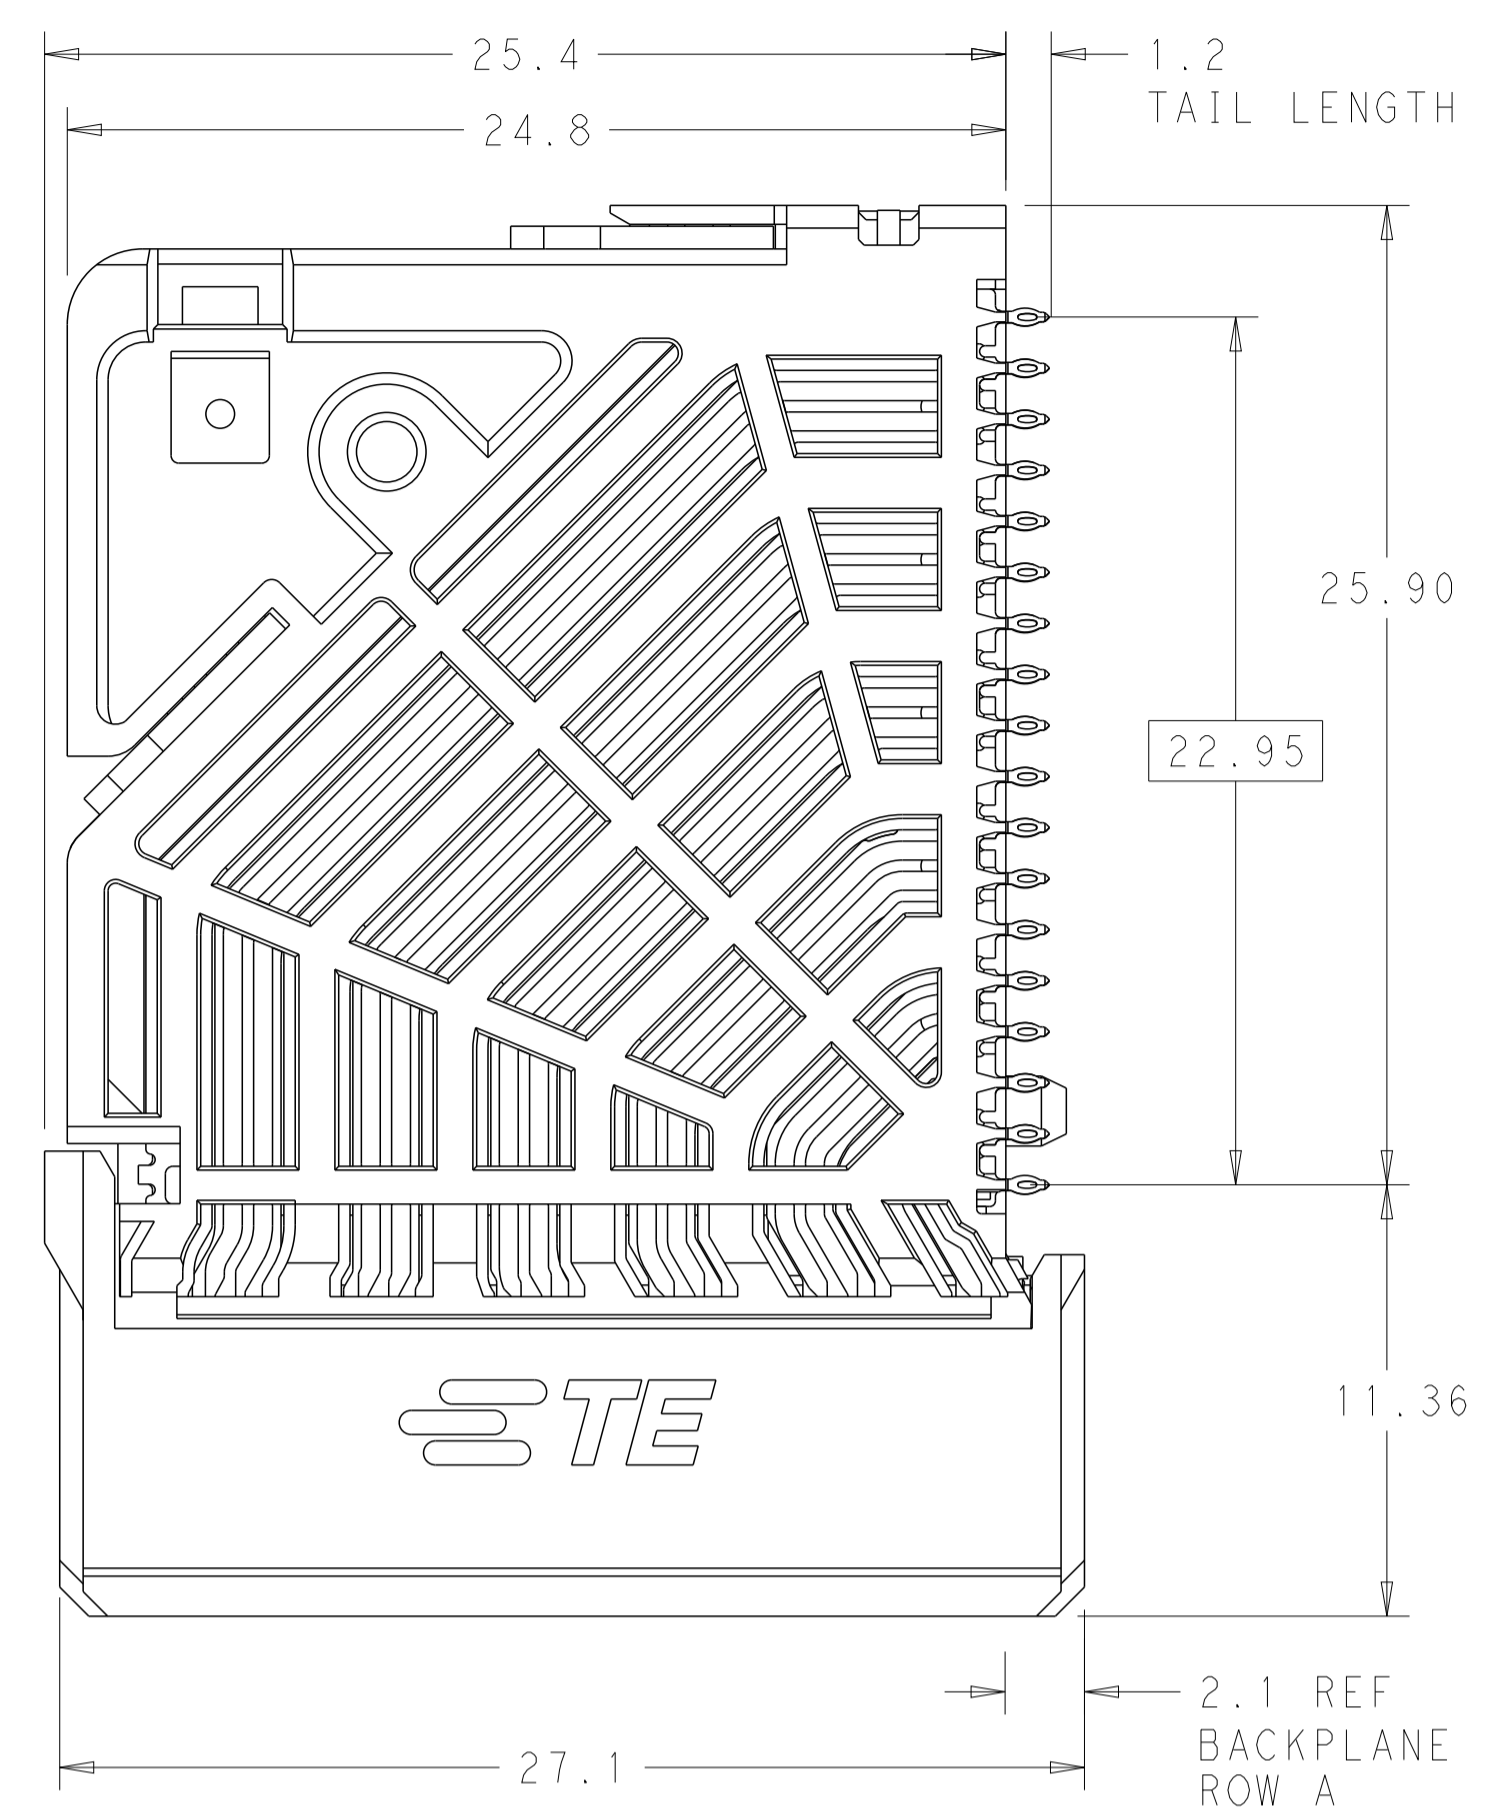


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
D		REVISED PER ECO-15-012351	03SEP2015	AP SY


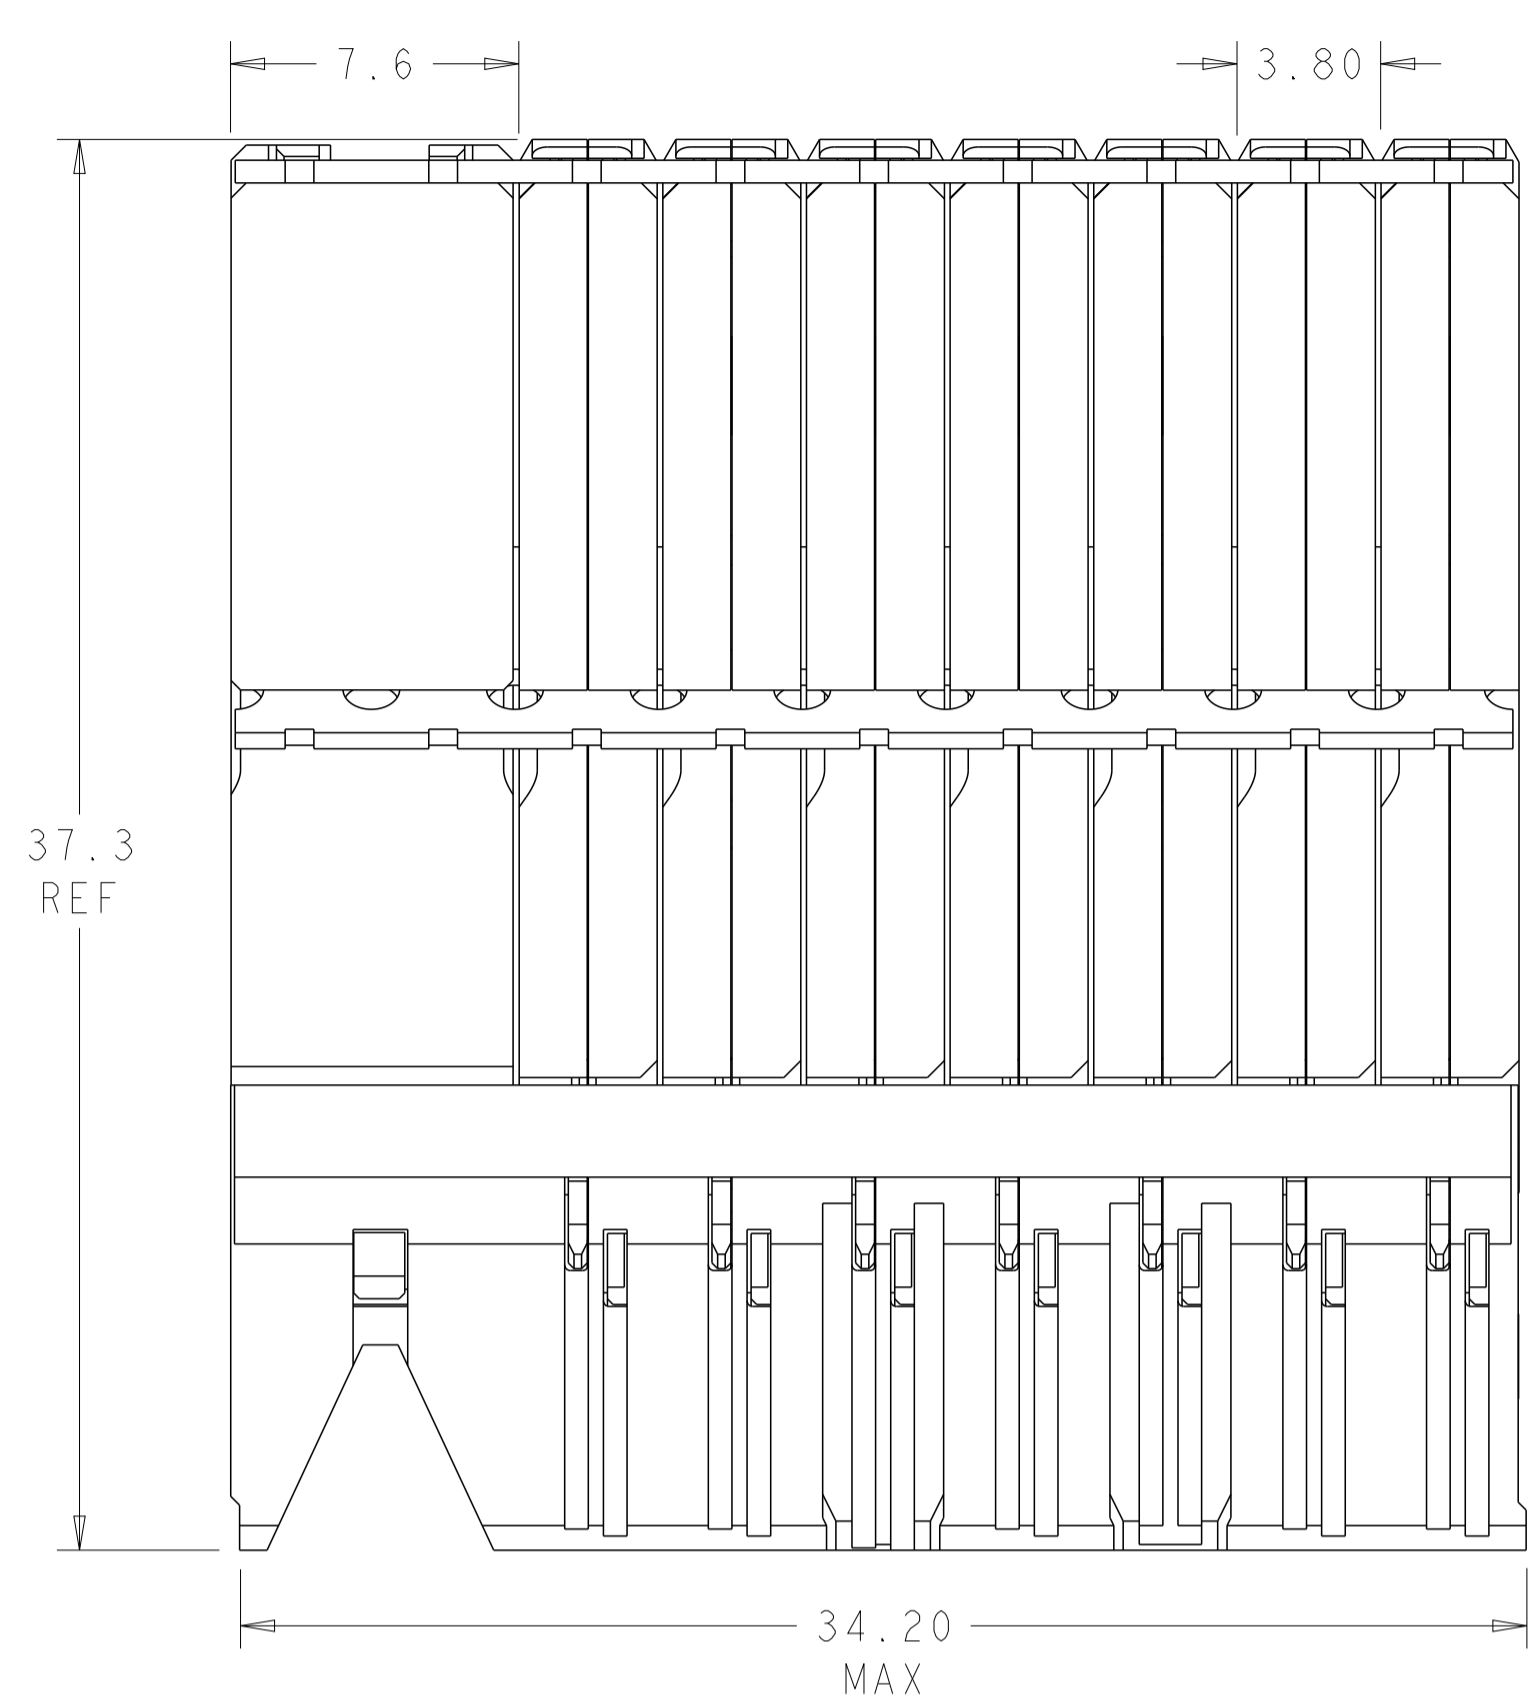


- ⚠ MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- ⚠ FINISH:
30μ" SELECTIVE GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3. CONNECTORS SUPPLIED WITH MOUNTING SCREWS

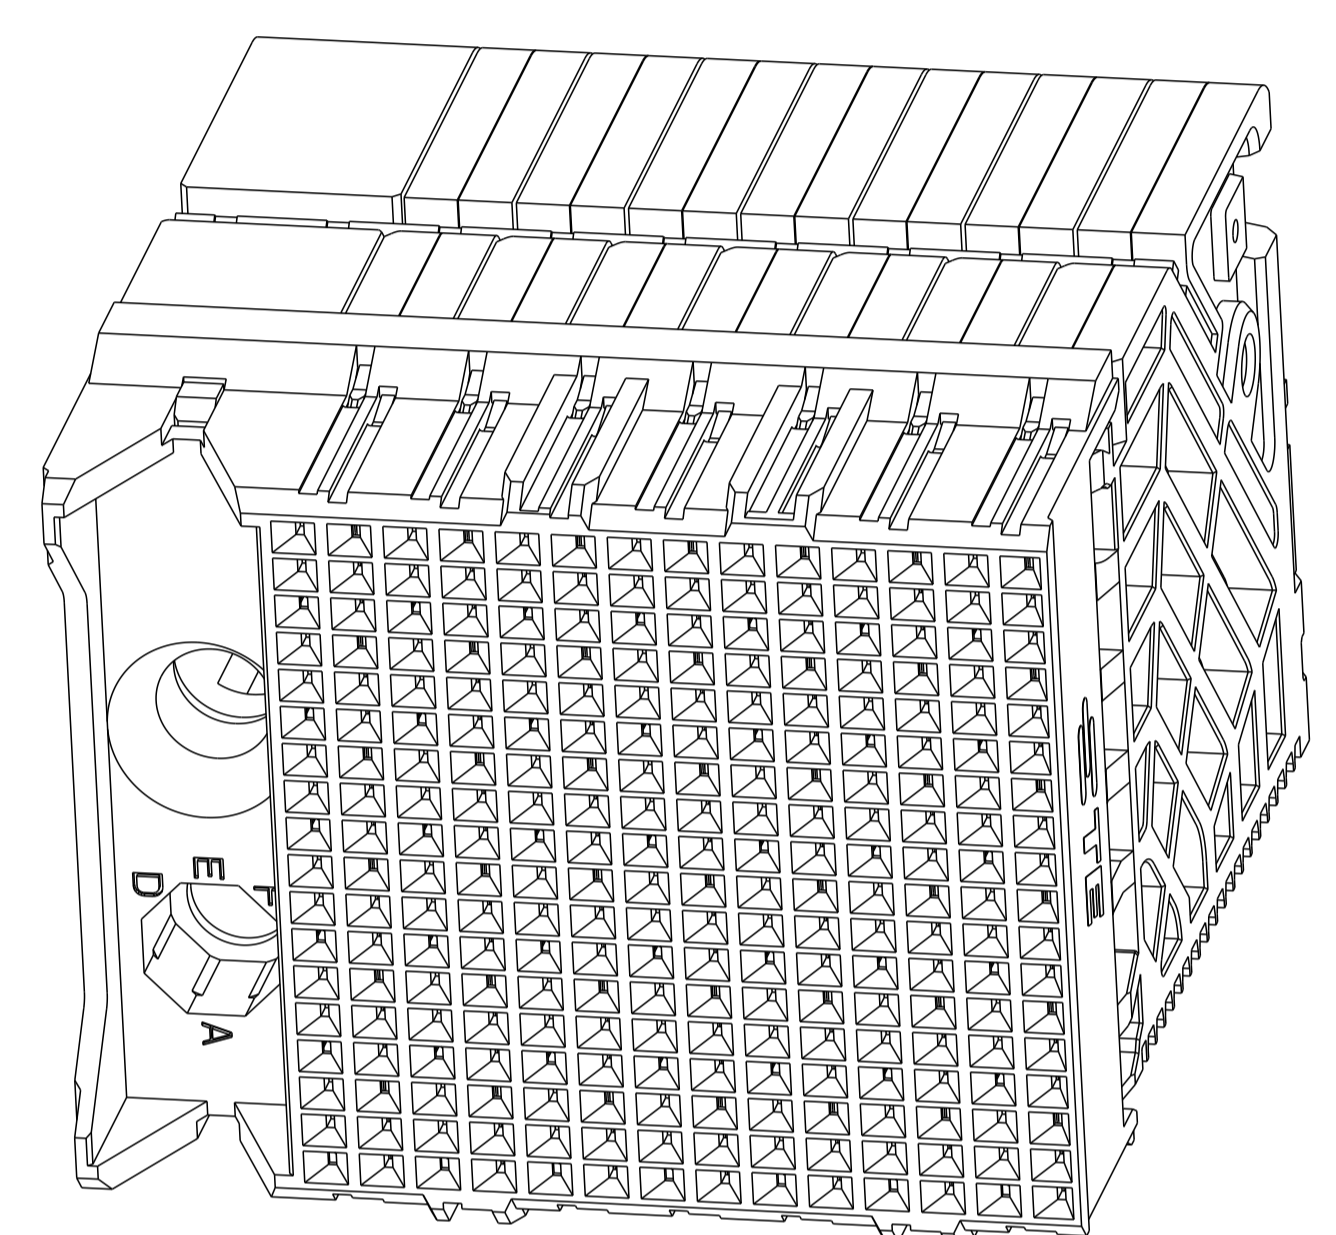

SCALE 4:1

REFER TO WWW.TE.COM FOR PRODUCT AVAILABILITY

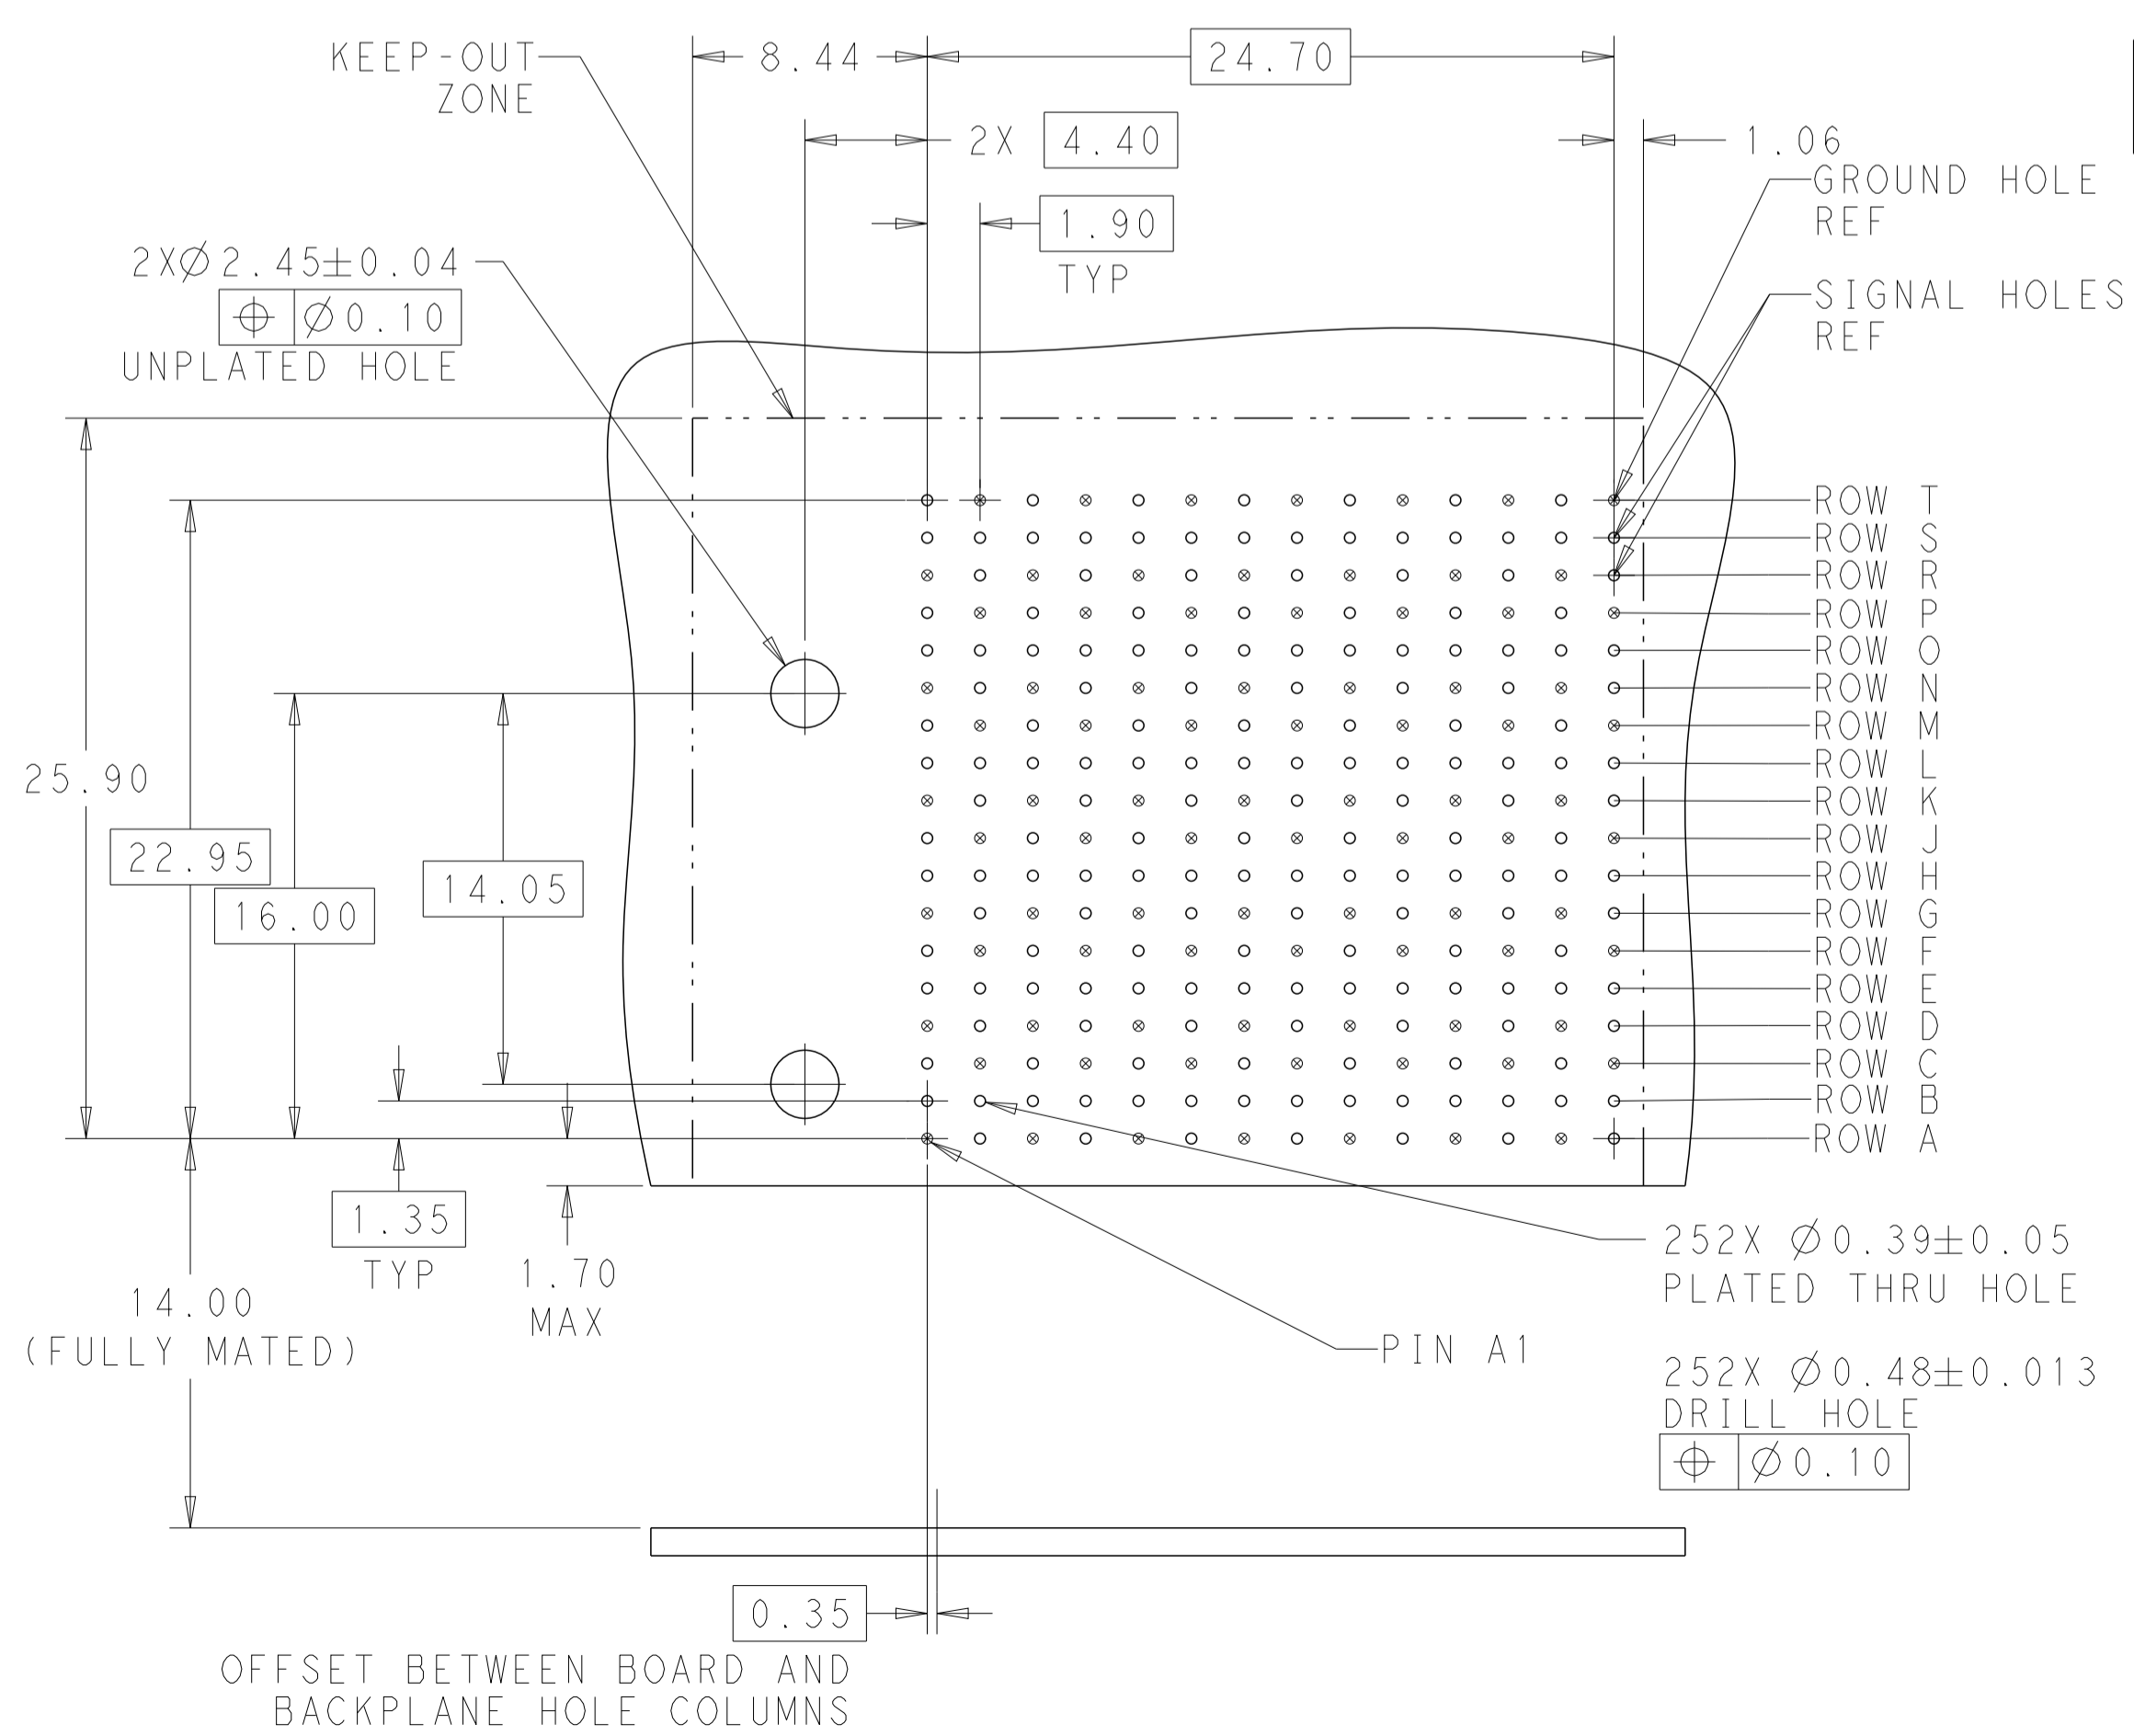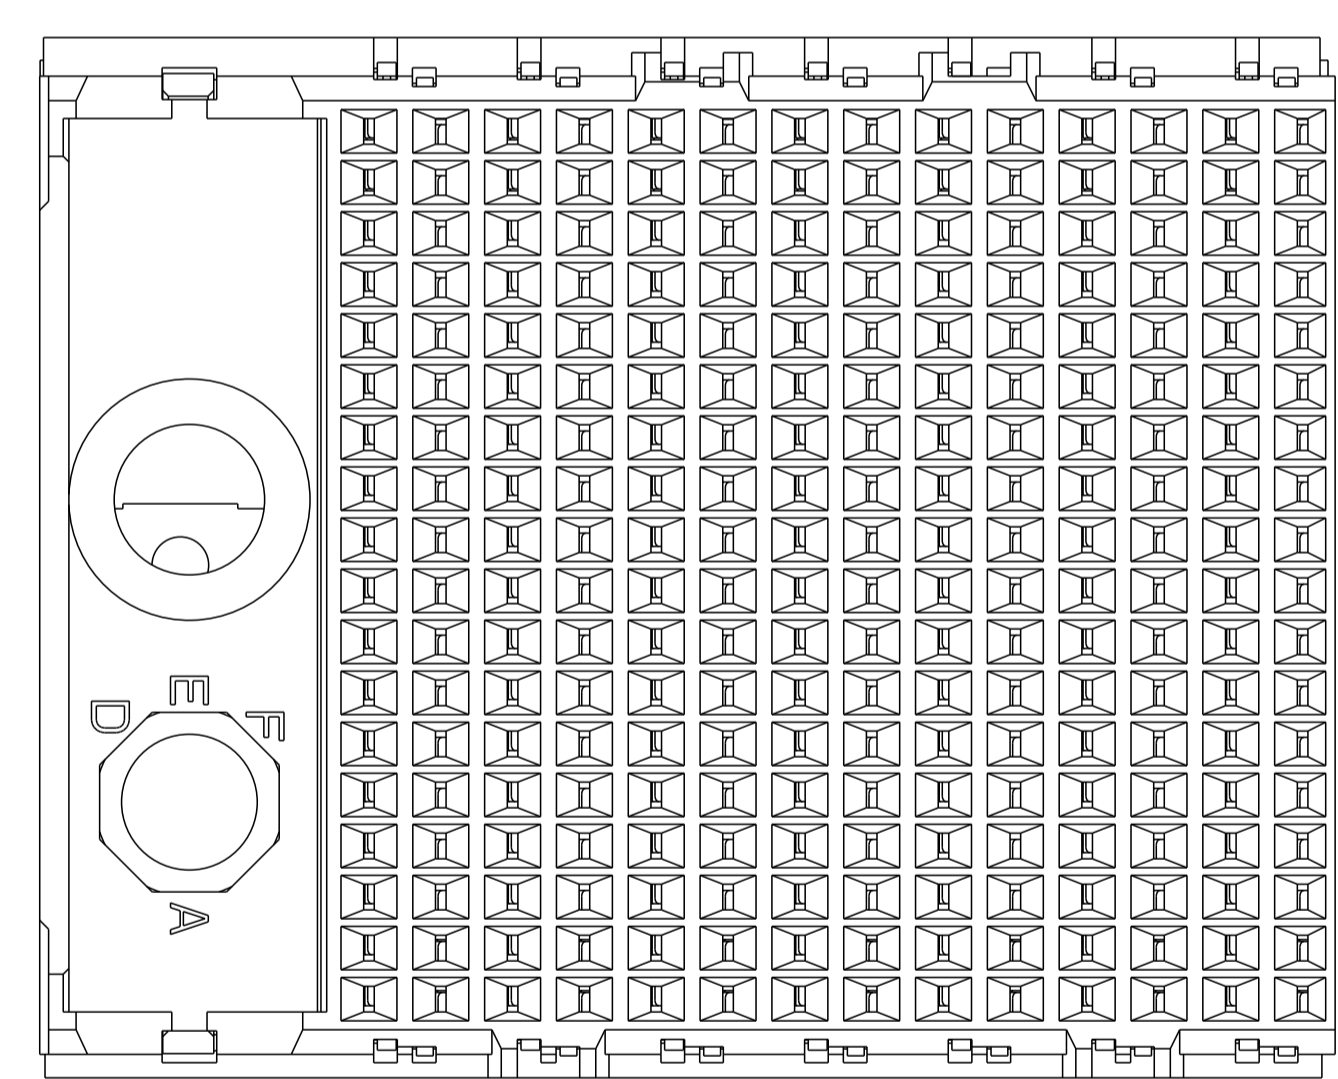

KEY POSITION CHART	
	NONE
	A
	B
	C
	D
	E
	F

OFFSET BETWEEN BOARD AND BACKPLANE HOLE COLUMNS
 RECOMMENDED PCB LAYOUT
 MIN BOARD THICKNESS 1.0

KEY POSITION	FINISH	PART NUMBER
H	⚠	8-2057989-1
G	⚠	7-2057989-1
F	⚠	6-2057989-1
E	⚠	5-2057989-1
D	⚠	4-2057989-1
C	⚠	3-2057989-1
B	⚠	2-2057989-1
A	⚠	1-2057989-1
NONE	⚠	2057989-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: B. CARBO 19AUG2010	TE Connectivity NAME: IMPACT, STD, R/A, 6 PAIR, 14 COLUMN, DAUGHTERCARD, LEFT GUIDED SIGNAL MODULE, 0.39 EYELET SIZE: CAGE CODE DRAWING NO: A100779 WEIGHT: - RESTRICTED TO: -
DIMENSIONS: mm		CHK: D. DIXON 19AUG2010	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±		APVD: D. DIXON 19AUG2010	
MATERIAL: SEE TABLE		PRODUCT SPEC: - APPLICATION SPEC: -	
SCALE: 5:1		SHEET: 1 OF 1	REV: D