


Class P

Features

- Wide input range: 90-305Vac
- Constant power mode operation
- Constant lumen output
- 3-in-1 dimming function (0-10Vdc, PWM Signal, Timer), dim-to-off
- Surge protection: Line-Line 5KV / Line-Earth 10KV
- Output and dimming signal isolated
- Output over-voltage, over-temperature and short-circuit protections
- IP67 enclosure for indoor and outdoor applications
- UL 8750 listed

Applications

- Roadway lighting, industrial lighting, plant lighting and landscape lighting

Selection Guide

Part Number	Max. Output Power (W)	Output Voltage Range (Vdc)	Full Power Output Voltage Range (Vdc)	Full Power Current Adjustable Range (A)	Default Output Current (A)	Typical Efficiency
LUB105X-041CP	105	20-41	30-41	2.56-3.50	2.80	90%
LUB105X-062CP		38-62	42-62	1.69-2.50	2.10	91%
LUB105X-100CP		50-100	75-100	1.05-1.40	1.40	91%
LUB105X-150CP		75-150	100-150	0.70-1.05	1.05	92%

Note: X in the Part Number can be either M or V, M means 3-in-1 dimming function and offline programmable; V means non-dimmable and output current adjustable via built-in potentiometer.

Input Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Input Voltage Range	AC input	90	100-277	305	Vac
Input Frequency Range		47	50/60	63	Hz
Input Current	100-277Vac input, full load	-	-	1.5	A
Power Factor	120Vac input, full load	0.97	0.99	-	-
	230Vac input, full load	0.95	0.97	-	
	277Vac input, full load	0.90	0.92	-	
Inrush Current	230Vac input, full load, cold start	-	-	75	A
Leakage Current	277Vac input, 50Hz	-	-	0.7	mA
Standby Power Consumption	M types (dim-to-off)	-	-	3	W
THD	100-240Vac input, 70-100% of full load	-	5	10	%
	277Vac input, 70-100% of full load	-	-	10	

Output Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Output Current Tolerance	Full load	-5	-	+5	%Iset
Output Current Set Point Range LUB105M-041CP LUB105M-062CP LUB105M-100CP LUB105M-150CP		0.35 0.25 0.14 0.11	- - - -	3.50 2.50 1.40 1.05	A
Output Current Set Point Range LUB105V-041CP LUB105V-062CP LUB105V-100CP LUB105V-150CP		1.75 1.25 0.70 0.53	- - - -	3.50 2.50 1.40 1.05	A
Output Current Set Point Range LUB105X-041CP LUB105X-062CP LUB105X-100CP LUB105X-150CP	Constant power	2.56 1.69 1.05 0.70	- - - -	3.50 2.50 1.40 1.05	A
Total Output Current Ripple	230Vac input, full load & LED load, peak-peak	-	5	10	%
Startup Overshoot Current	100-277Vac input, full load & LED load	-	-	10	%Iset
Output Voltage LUB105X-041CP LUB105X-062CP LUB105X-100CP LUB105X-150CP	No load	- - - -	- - - -	50 70 120 170	V
Line Regulation	100-277Vac input	-1	-	+1	%
Load Regulation	230Vac input, 60-100% of full load	-3	-	+3	%
Turn-on Delay	120Vac input, full load	-	1	2	s
	230Vac input, full load	-	-	0.5	
Efficiency LUB105X-041CP I _o = 2.56A I _o = 3.50A LUB105X-062CP I _o = 1.69A I _o = 2.50A LUB105X-100CP I _o = 1.05A I _o = 1.40A LUB105X-150CP I _o = 0.70A I _o = 1.05A	120Vac input, full load	87 86 88 88 87 86 89 87	89 88 90 90 89 88 90 89	- - - - - - - -	%
Efficiency LUB105X-041CP I _o = 2.56A I _o = 3.50A LUB105X-062CP I _o = 1.69A I _o = 2.50A LUB105X-100CP I _o = 1.05A I _o = 1.40A LUB105X-150CP I _o = 0.70A I _o = 1.05A	230Vac input, full load	89 88 89 89 89 88 90 89	91 90 91 91 91 90 92 91	- - - - - - - -	%
Efficiency LUB105X-041CP I _o = 2.56A I _o = 3.50A LUB105X-062CP I _o = 1.69A I _o = 2.50A	277Vac input, full load	89 89 89 89	91 91 91 91	- - - -	%

LUB105X-100CP Io = 1.05A Io = 1.40A		89 88	91 90	- -	
LUB105X-150CP Io = 0.70A Io = 1.05A		90 89	92 91	- -	

Note: Unless otherwise specified, data in this datasheet should be tested under the conditions of 230Vac input, rated load and Ta=25°C.

Protection Specifications

Parameter	Notes
Over Voltage Protection	The driver will enter protection mode and will resume normal operation when the fault condition is cleared.
Over Temperature Protection	The output current will decrease, and will return to its set point when the over temperature condition is cleared.
Short-circuit Protection	The driver will enter constant current/auto recovery mode. No damage will occur when the output is shorted. The output current will return to its set point when the fault condition is cleared.

Environmental and Other Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Ambient Temperature	Ta	-40	-	+60	°C
Operating Case Temperature	Tc	-40	-	+90	°C
Storage Temperature		-40	-	+85	°C
Storage Relative Humidity		5	-	100	%RH
Isolation Voltage	Input-Output	-	3,750	-	Vac
	Input-PE	-	1,600	-	
	Output-PE	-	1,600	-	
Insulation Resistance	Input-Output/Input-PE/Output-PE, 500Vdc/60s /70%RH	50	-	-	MΩ
Grounding Resistance	25A/60s	-	-	0.1	Ω
Life Time	230Vac, full load, 75°C case temperature	-	50	-	10 ³ hrs
MTBF(MIL-HDBK-217F)	230Vac input, 80% of full load	-	200	-	10 ³ hrs
Dimensions (L*W*H)	153.6 x 68.0 x 37.0 mm				
Weight	700±100g				

Dimming Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit	
Absolute Maximum Voltage	0-10V on the DIM +	-	10	-	V	
Source Current	0-10V on the DIM +	-	0.2	0.4	mA	
Dimming Output Range	LUB105M-041CP	0.35	-	3.50	A	
	LUB105M-062CP	0.25	-	2.50		
	LUB105M-100CP	0.14	-	1.40		
	LUB105M-150CP	0.10	-	1.05		
Dimming Range		0	-	10	V	
PWM	Default 0-10V / PWM Dimming	High Level	9.7	-	10.3	V
		Low Level	0	-	0.3	V
		Frequency Range	300	-	2,000	Hz
		Duty Cycle	1	-	99	%

EMC Specifications

Parameter	Standards
EMI	EN55015
	EN61000-3-2, 3
EMS	EN61547
	EN61000-4-2, 3, 4, 5, 6, 11

Typical V-I Characteristic Curves

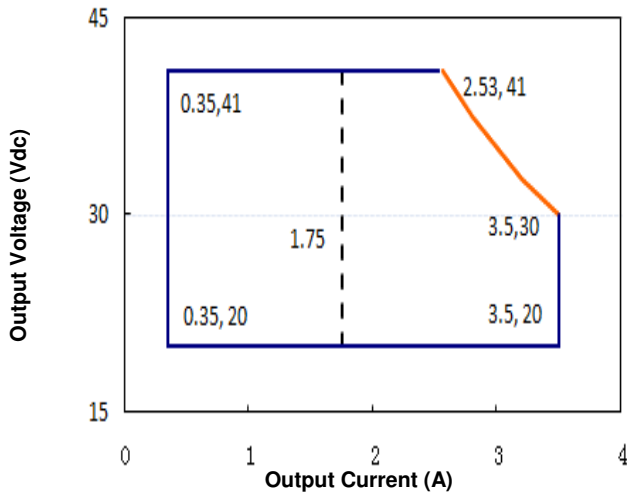


Figure 1: Typical V-I Characteristic Curve (LUB105X-041CP)

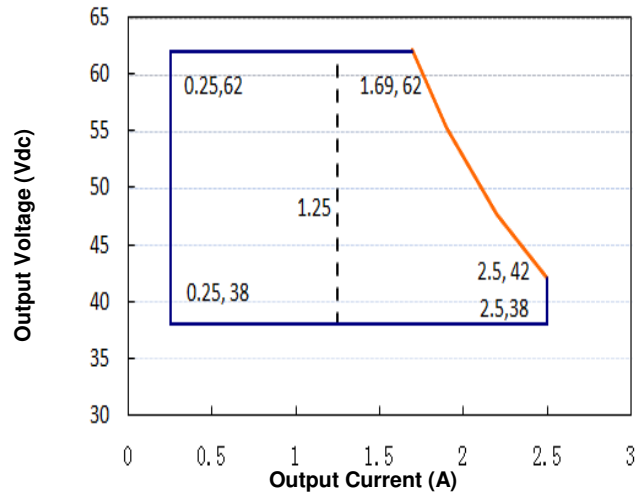


Figure 2: Typical V-I Characteristic Curve (LUB105X-062CP)

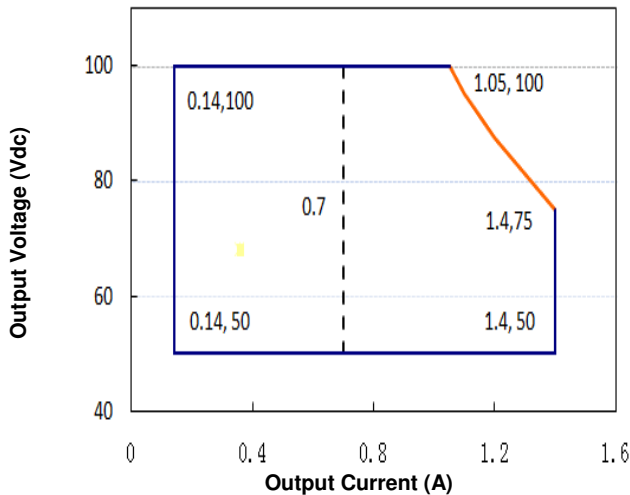


Figure 3: Typical V-I Characteristic Curve (LUB105X-100CP)

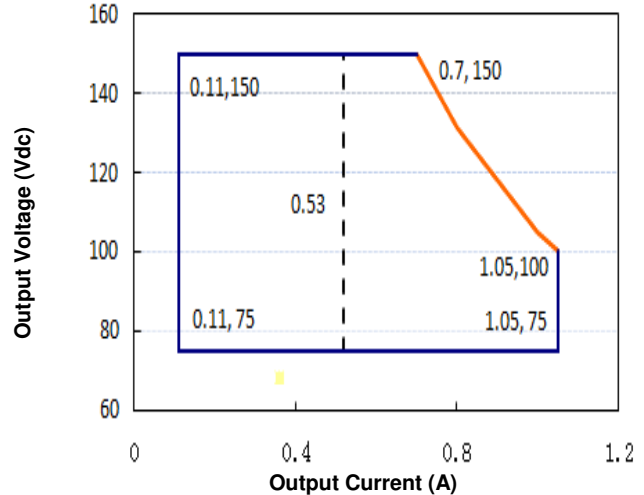


Figure 4: Typical V-I Characteristic Curve (LUB105X-150CP)

Note: X=V is suitable for the right area of dotted line, X=M is suitable for the solid line contained area.

Characteristic Curves

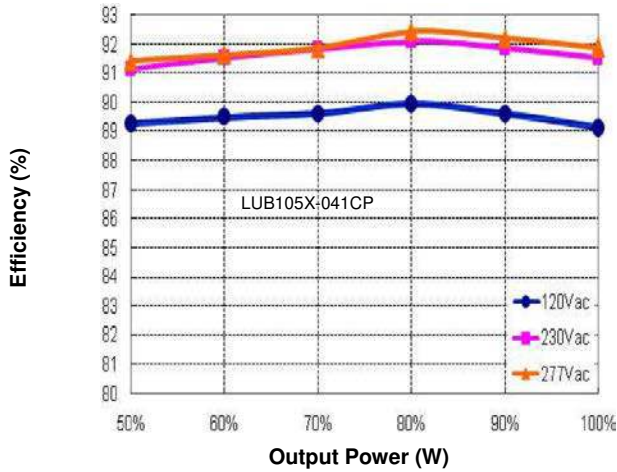


Figure 5: Efficiency vs. Output Power (Io=2.56A)

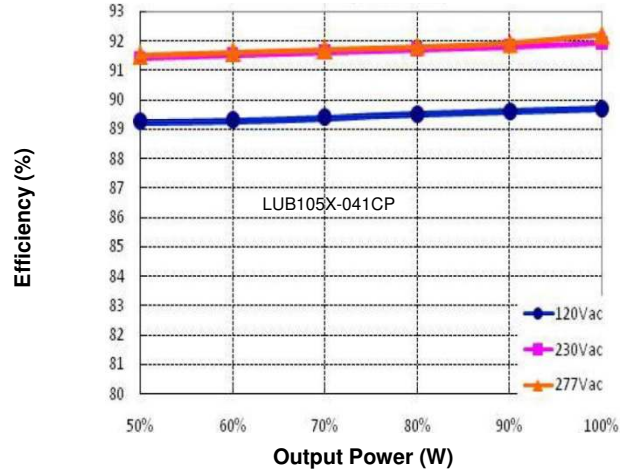


Figure 6: Efficiency vs. Output Power (Io=3.5A)

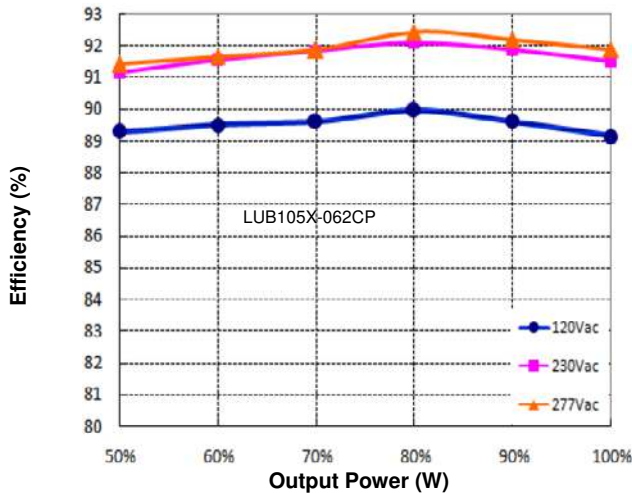


Figure 7: Efficiency vs. Output Power (Io=1.69A)

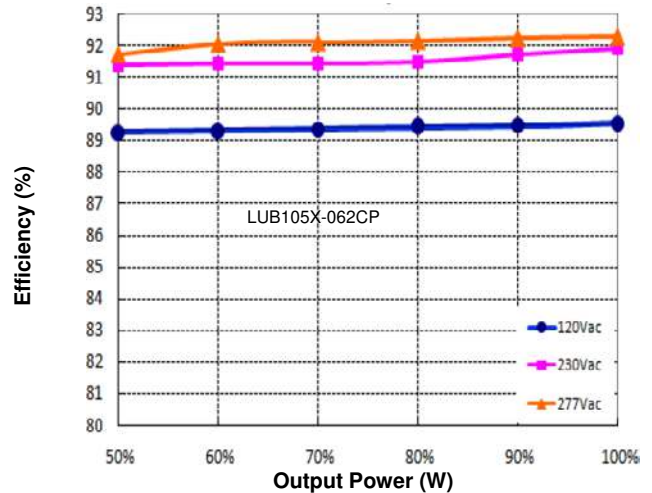


Figure 8: Efficiency vs. Output Power (Io=2.50A)

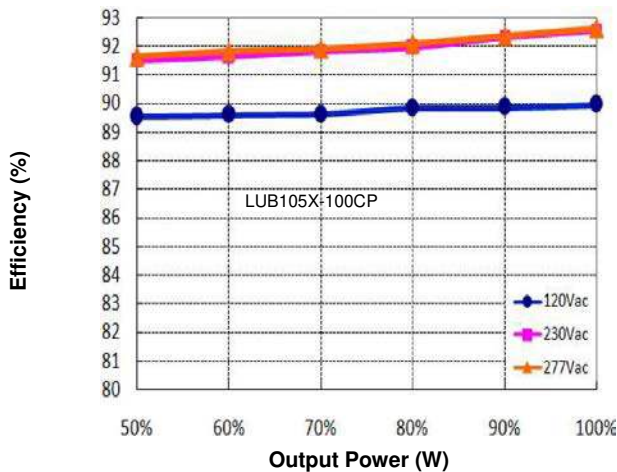


Figure 9: Efficiency vs. Output Power (Io=1.05A)

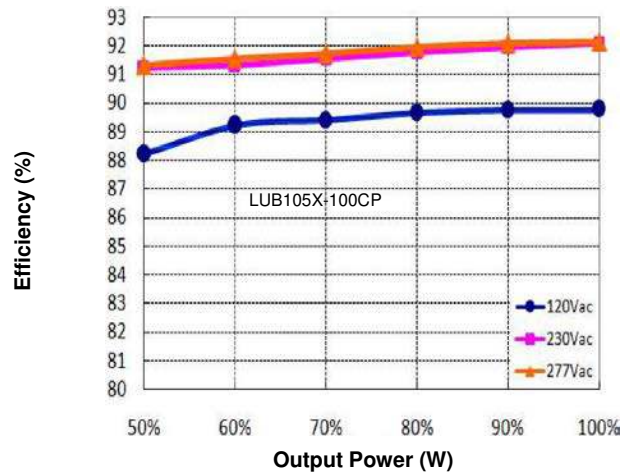


Figure 10: Efficiency vs. Output Power (Io=1.4A)

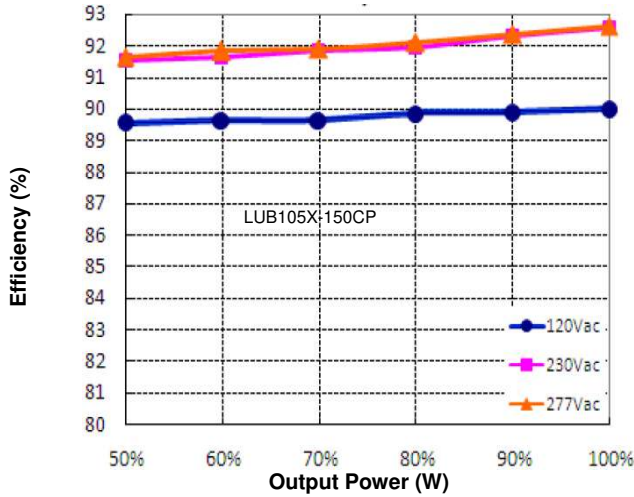


Figure 11: Efficiency vs. Output Power (Io=0.70A)

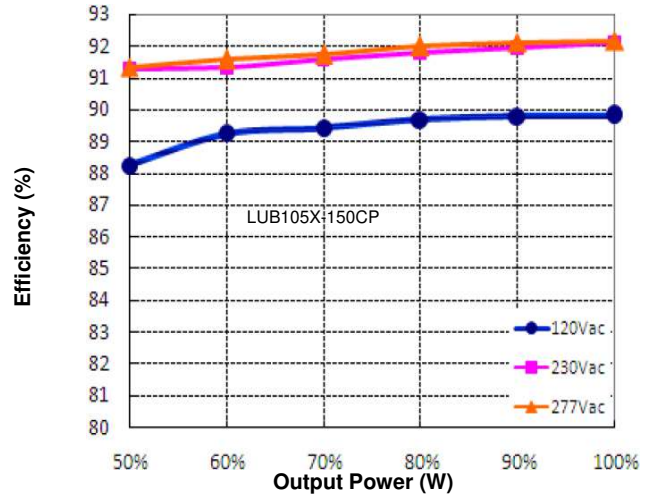


Figure 12: Efficiency vs. Output Power (Io=1.05A)

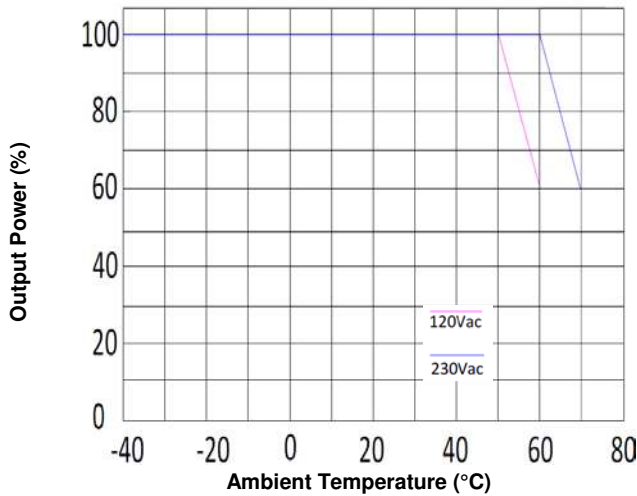


Figure 13: Output Power vs. Ambient Temperature

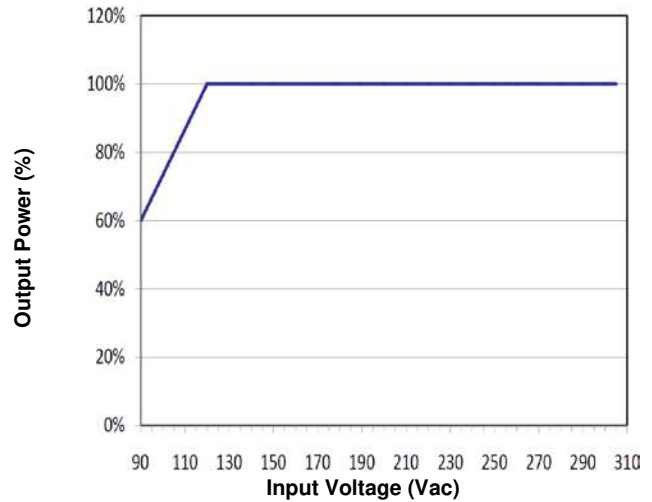


Figure 14: Output Power vs. Input Voltage

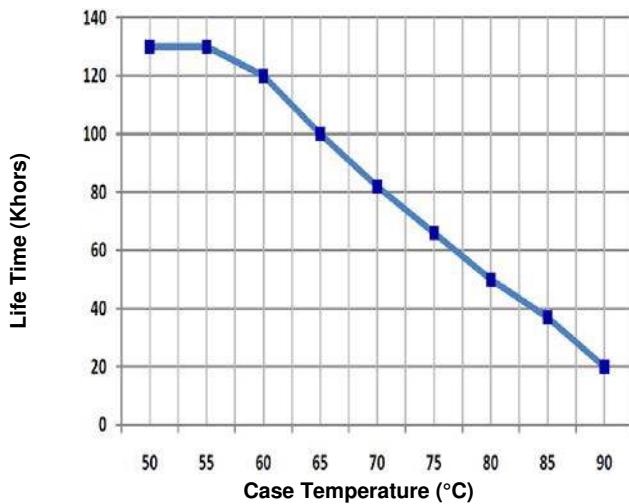


Figure 15: Life Time vs. Case Temperature

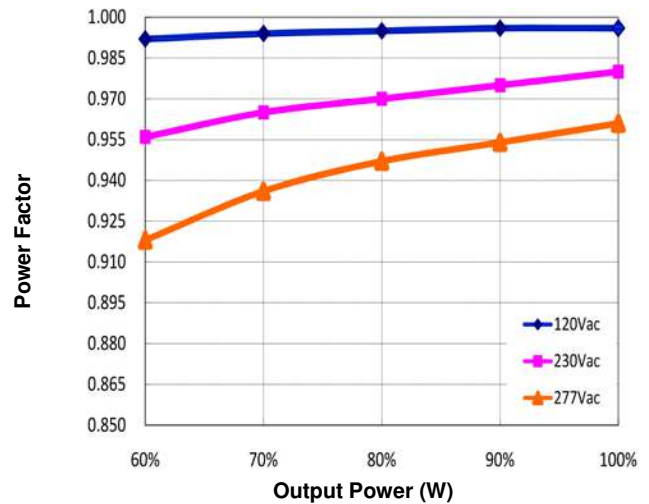


Figure 16: Power Factor vs. Output Power

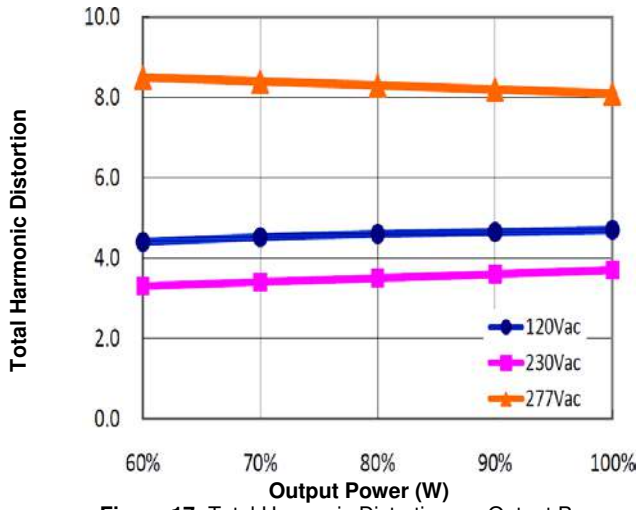


Figure 17: Total Harmonic Distortion vs. Output Power



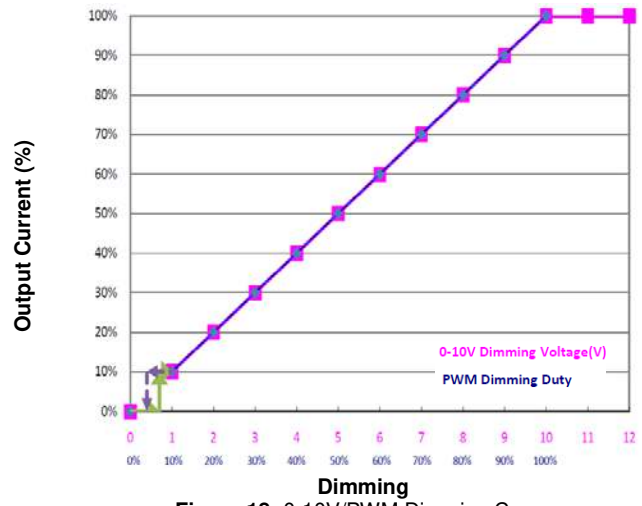


Figure 18: 0-10V/PWM Dimming Curve

Mechanical Drawing

LUB105V types (Unit: mm)

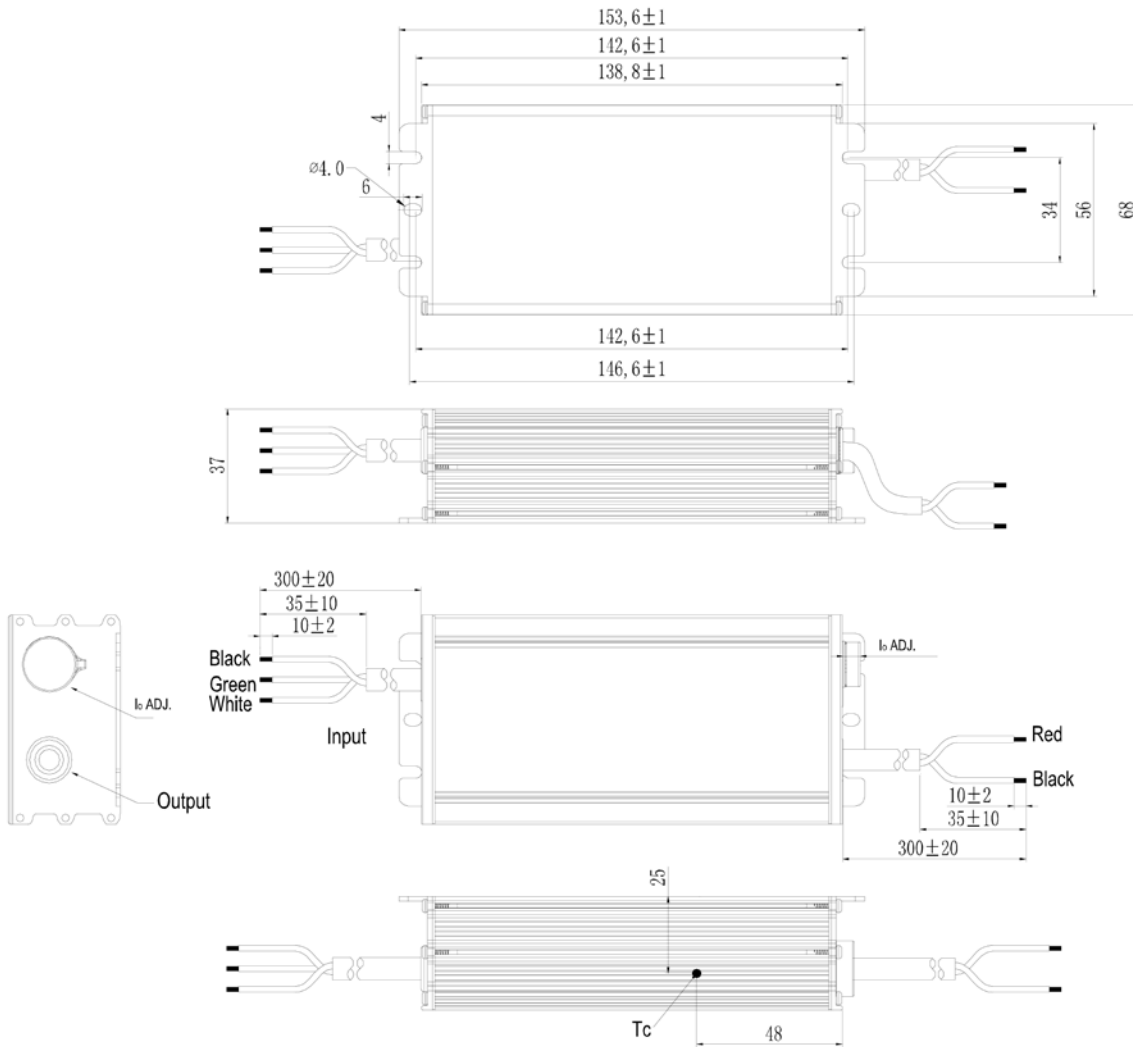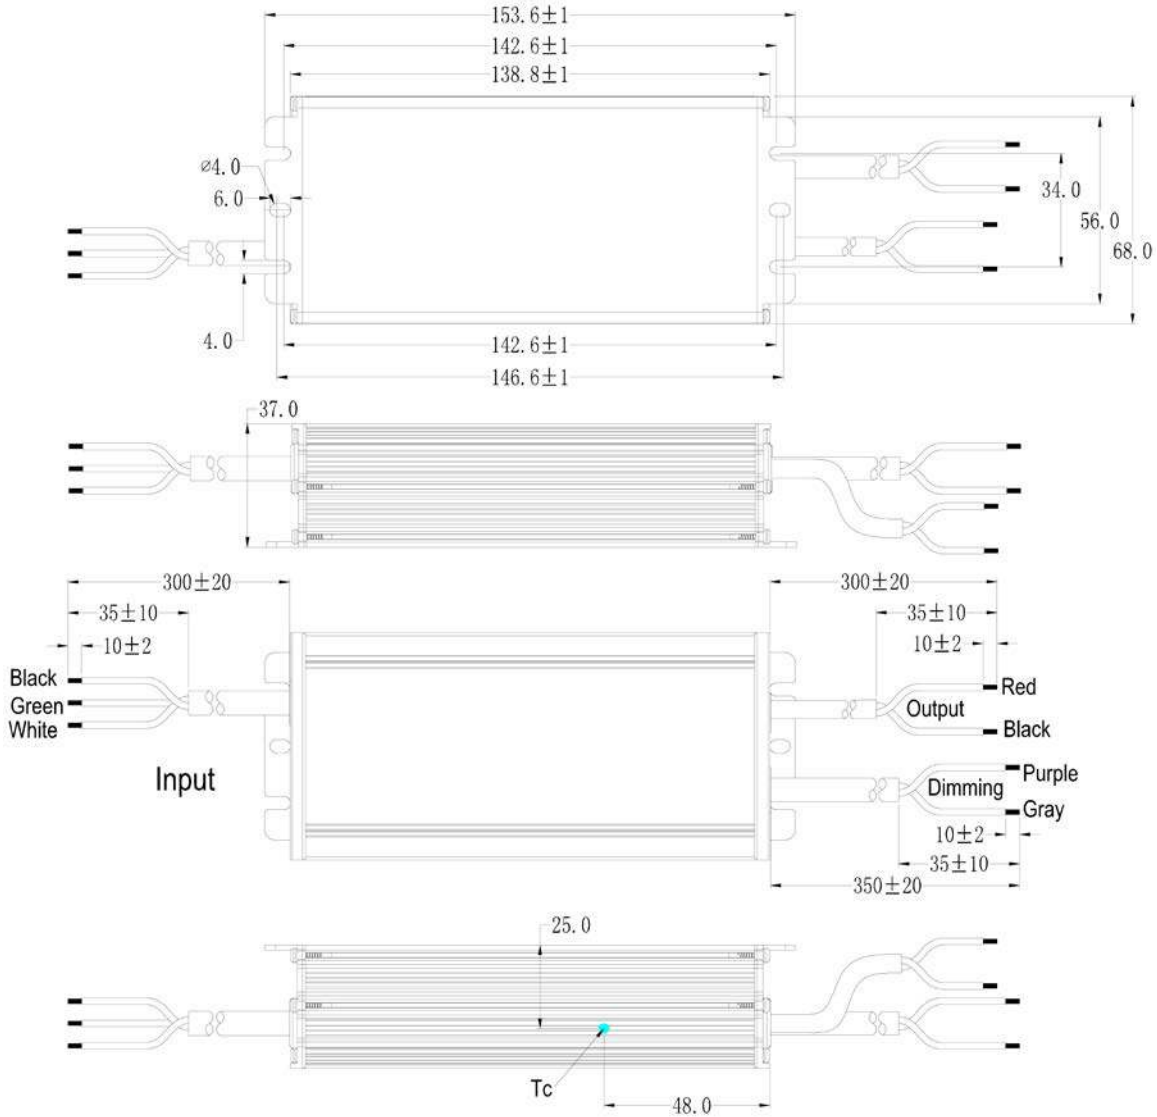

LUB105M types (Unit: mm)


Wire	Specification
Input	SJOW 18AWG*3C, 7.8mm external diameter
Output	SJOW 18AWG*2C, 7.3mm external diameter
Dimming (M types)	UL2733 22AWG*2C, 5.45mm external diameter