

Robust, attack resistant keypads for use in the most exposed and hostile public environments

- Rugged, reliable and responsive data entry
- Vandal resistant (20J BS EN 60068-2-75: 1997)
- Weather, water and dust resistant (IP65)
- · All metal keytops and casing
- 4 key, 12 key and 16 key formats

- Permanent, high contrast, engraved keytop graphics
- Raised "home pip" on the "5" key
- Simple 'row and column' circuit matrix, terminated by a male, goldplated, square pin, 0.1" (2.54mm) pitch connector with locking ramp
- Can be fixed to a flat surface or under panel mounted for a flush, low profile installation










1000 Series vandal resistant keypads

A series of attack resistant keypads for use in the most hostile public environments. Designed and constructed to ensure rapid and reliable data entry in the most challenging applications, the Storm 1000 Series keypads are field proven and lab tested to survive hard use, abuse and vandalism. Ideal for use in a wide range of industrial, commercial and public applications.

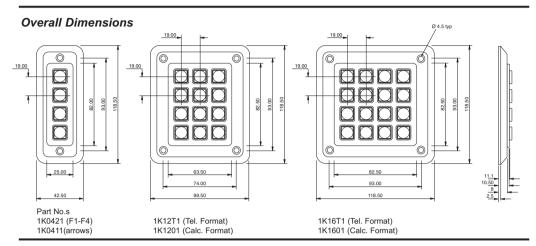



Connection Details for 4 Key Keypad

CONTACT CONNECTIONS

| • • • • |
|---------------------------------|
| 5 4 3 2 1 |
| (As viewed from rear of keypad) |
| Δ[1] |
| 2H |
| В |
| С |
| □□ |
| KEY LOCATION |

| | CONTACT MATRIX | | | | |
|--------------|-------------------|--|--|--|--|
| CONNE PIN | C. ROW/ COLUMN | | | | |
| 1 | common | | | | |
| 2 | D | | | | |
| 3 | С | | | | |
| 4 | В | | | | |
| 5 | Α | | | | |

Connection Details for 12 Key Keypad

(As viewed from front of keypad)

Countersunk Fixing Screws (Not Supplied)

Sealing Gasket

| CONTACT CONNECTIONS | Γ |
|--|---|
| ••••• | L |
| 8 7 6 5 4 3 2 1 (As viewed from rear of keypad) | ŀ |
| (AS VIEWED ITOIT TEEL OF REYPRO) | ŀ |
| A 1 2 3 | ŀ |
| B | ŀ |
| | r |

| d | MATRIX | | |
|-----|----------------|----------------|--|
| | CONNEC. PIN | ROW/ COLUMN | |
| | 1 | Α | |
| id) | 2 | В | |
| | 3 | 1 | |
| | 4 | 2 | |
| | 5 | 3 | |
| | 6 | - | |
| | 7 | D | |
| ad) | 8 | С | |
| au) | | | |

CONTACT


COLUMN


Connection Details for 16 Key Keypad

| COI | | | | | | | | |
|-----|----------|---------|-----------|---------|----------|-----------|-----------|---|
| | | | | | | | • | |
| (As | 7 vie | 6 we | 5 d fr | 4 om | 3 rea | 2 ar o | 1 f ke | y |
| Α | 1 | 2 |][| 3 | 4 |] | | |
| | | | | | | | | |

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | | | Г |
|-----|-----|------|---------|-----|------|---------|-------|---|---|
| /ie | wed | d fr | om | rea | ar o | f ke | ypad) | | Γ |
| П | 2 | 16 | 3 | 4 | 1 | | | | |
| ╡ | F | ίř | Ħ | Ë | i | | | | |
| ╡ | H | ίŀ | ╡ | 는 | i | | | | |
| ╡ | ⊢ | ╬ | ╡ | H | ╣ | | | | |
| ᆜ | _ | ٦L | ATI | | | | | | |
| | L | | AII | ÚI. | ٧. | . e i . | | . | |

Mounting & Connection Details

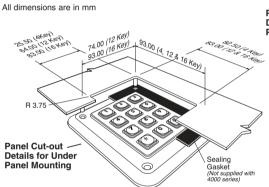



Electrical

| Contact Bounce | 5ms (max) |
|-----------------------|------------------------|
| Contact Resistance | 100 ohms (max) |
| Insulation Resistance | 50 Mohms (min) |
| Breakdown Voltage | 500V AC (max 60 secs.) |
| Operating Voltage | 24V DC (max) |
| Operating Current | 50mA (max) |

Mechanical

| Operational Life | 4 million cycles (min) per key |
|------------------|-------------------------------------|
| Keytop Travel | 1.4mm nominal |
| Actuation Force | 180gms nominal |
| Connector | 0.1" pitch, gold plated square pin, |
| | male connector with locking ramp |

Environmental

| Water / Dust Sealed | IP65 (when mounted to suitable enclosure) |
|-------------------------|---|
| Operational Temperature | -40°C to +100°C (Dry) |
| Impact | 20 Joules via 50mm |
| | Ø steel impactor |
| | |

Material

| Chromed die-cast zinc |
|---------------------------|
| Chromed die-cast zinc |
| Engraved |
| Gold on Nickel plated FR4 |
| |

| Accessories | | |
|--|------------|--|
| Item | Stock No. | Notes |
| PC Interface | 4200-00[x] | RS232 |
| Rear Casing Providing space for additional components or circuitry (12 key formats only) | RC12020[x] | Supplied complete with fixing hardware, sealing gaskets and fixing instructions. |
| Blank Keytops set of four | 1K0000[x] | Supplied without keytop graphics. Suitable for engraving. |
| Privacy Shield Provides PIN / Entry Code security | 1KFS020[x] | Supplied complete with fixing hardware, sealing gaskets and fixing instructions. 12 key only. |

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.









www.storm-interface.com

Storm Interface products include technology protected by international patents FM 39602 and design registration. All rights reserved.

1000-LIT-01 Rev 4

Nov 2008