

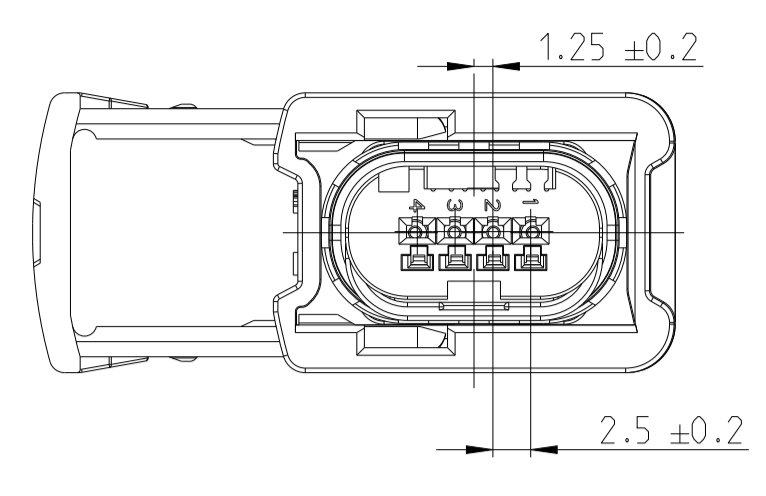
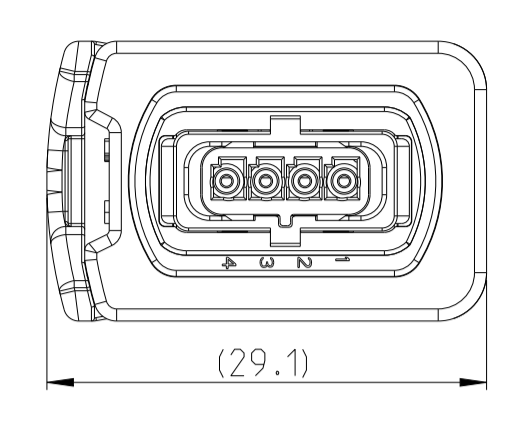
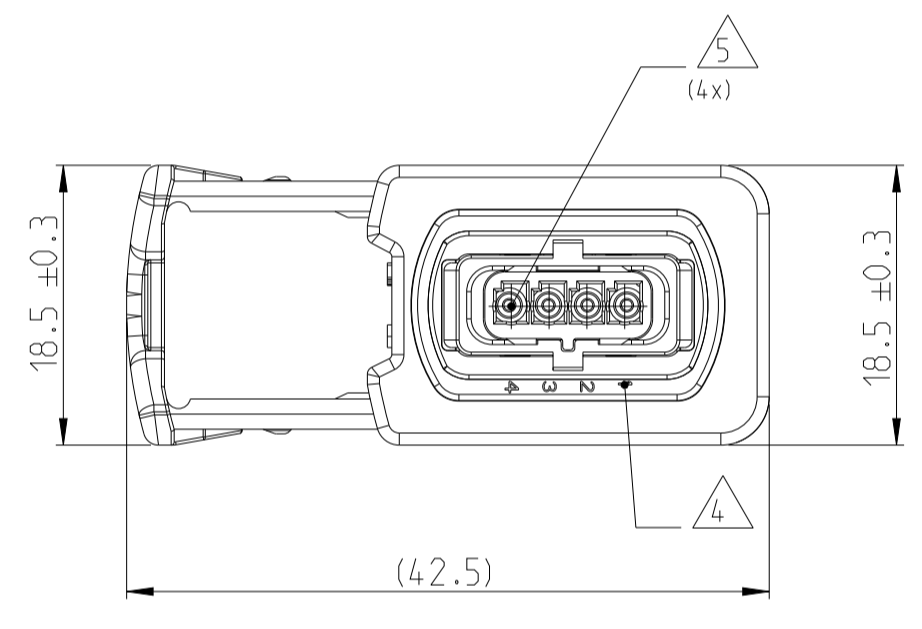
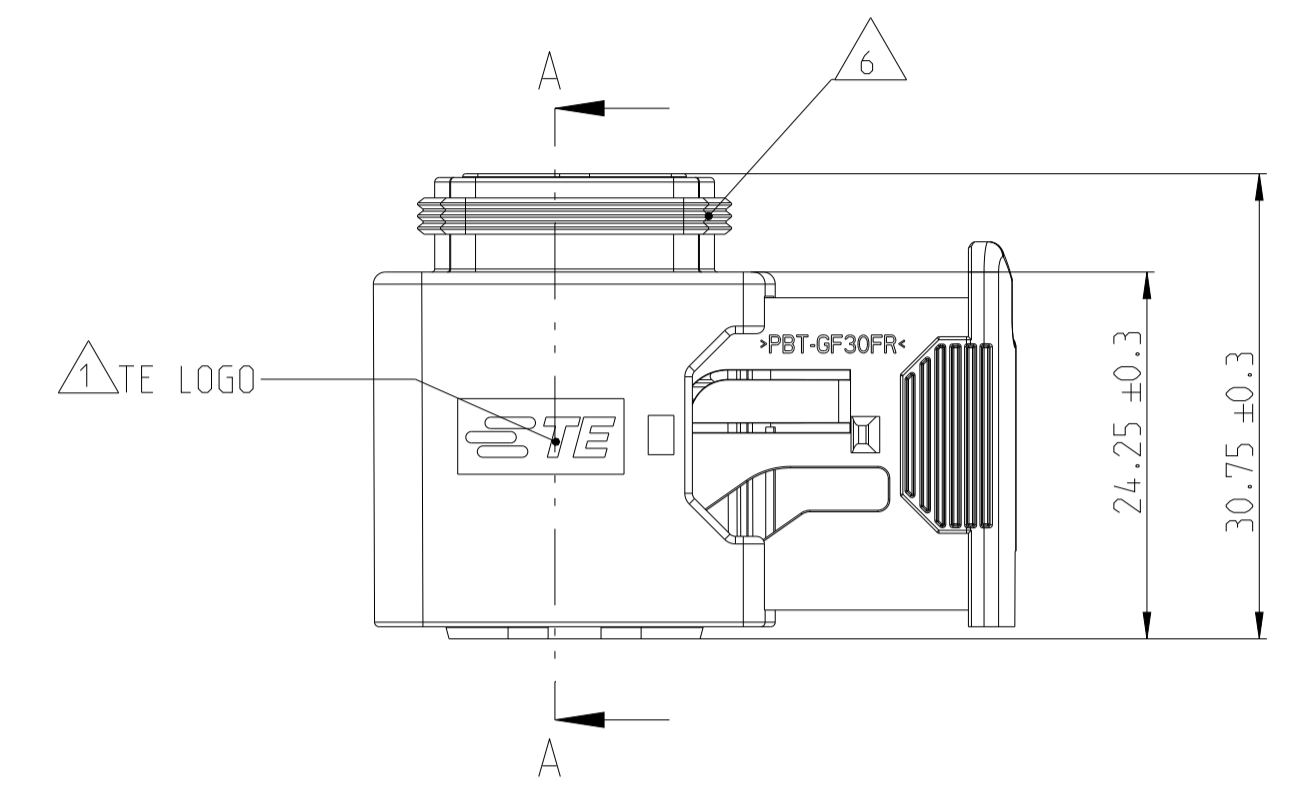


SLIDE IN LOCKED POSITION
Schieber in Verriegelungsposition

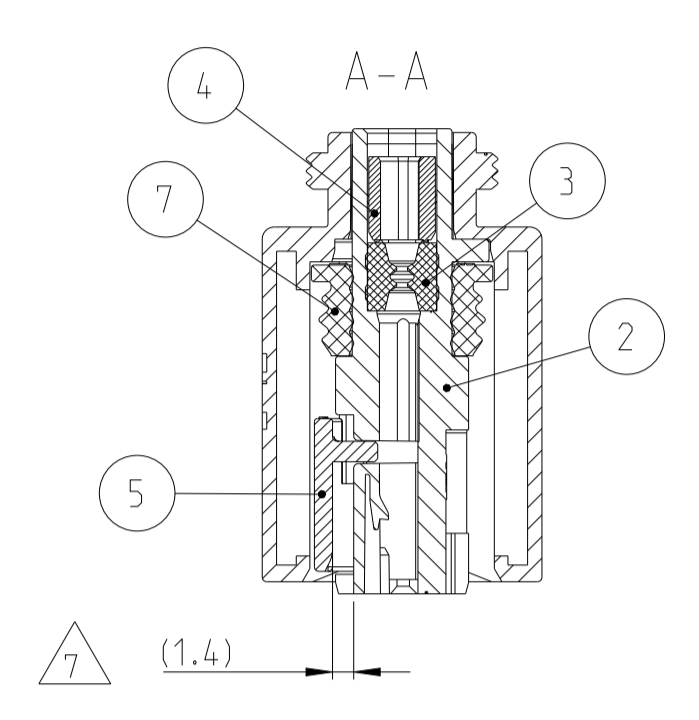

DELIVERY CONDITION:
Lieferzustand:

SECONDARY LOCKING AND SLIDE
IN PRE-LOCKED POSITION
2. Kontaktsicherung und Schieber
in Vorraststellung

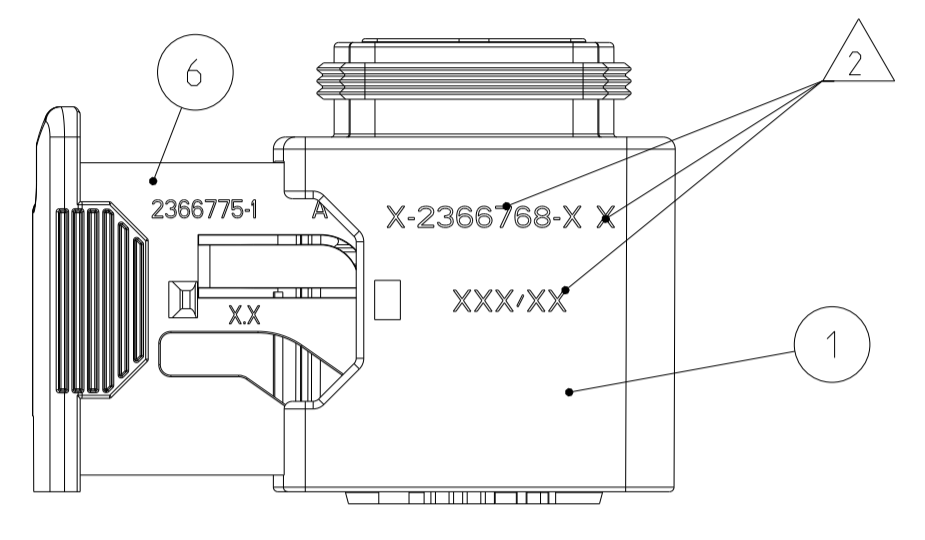


1-2366768-1 AS SHOWN
1-2366768-1 wie gezeigt

REVISIONS				
P	LTN	DESCRIPTION	DATE	OWN APVD
A		NEW DRAWING	04DEC2020	C.C. G.J.
A1		ECR-22-144043	28JUN2022	N.M. G.J.
A2		ECR-23-185400	28AUG2023	N.M. G.J.


NOTES
Bemerkungen

- 1 TE LOGO
TE Logo
- 2 ASSY PN, REVISION AND PRODUCTION DATE (CALENDAR DAY/YEAR); MARKING OPTIONAL AS LASER ENGRAVING OR LASER WITH COLOR CHANGE
Assy PN, Revision und Produktionsdatum (Kalendertag/Jahr); Beschriftung wahlweise als Lasergravur oder Laser mit Farbumschlag
- 3 BULK PACKAGING IN CORRUGATED BOX
Schüttgut im Versandkarton
- 4 CAVITY NUMBERING
Kammer Bezeichnung
- 5 CAVITIES MATED WITH MCON 1.2 CB (STANDARD CRIMP)
SEE PRODUCT GROUP DRAWING
TE NO: 1534326
INSULATION O.D. RANGE: 1.2 to 1.9 mm
Kontaktkammern passend fuer MCON 1.2 CB (Standard Crimp)
siehe Produktgruppenzeichnung
TE Nr: 1534326
Isolationsdurchmesser: 1.2 bis 1.9 mm
- 6 SUITABLE COVERS SEE DRAWING: 1670150, 1670365
Passende Kappen siehe Zeichnung: 1670150, 1670365
- 7 SLIDING DISTANCE OF SECONDARY LOCKING
Verschiebeweg der 2. Kontaktsicherung
- 8 FITS TO TE INTERFACE DRAWING 208-18142
Passend zur Ausführungsvorschrift 208-18142
- 9 MALFUNCTION CAUSED BY LACQUER IS NOT COVERED BY TE WARRANTY.
Funktionsbeeinträchtigung durch Lackieren liegt nicht im Einfluss und Gewährleistungsumfang von TE.
- 10 SUITABLE BLIND PLUG: TE No 2286476-1 OR TE No 1-1452424-1
Passender Blindstopfen: TE Nr 2286476-1 oder TE Nr 1-1452424-1


CODING A
Kodierung
PN 1-2366768-1

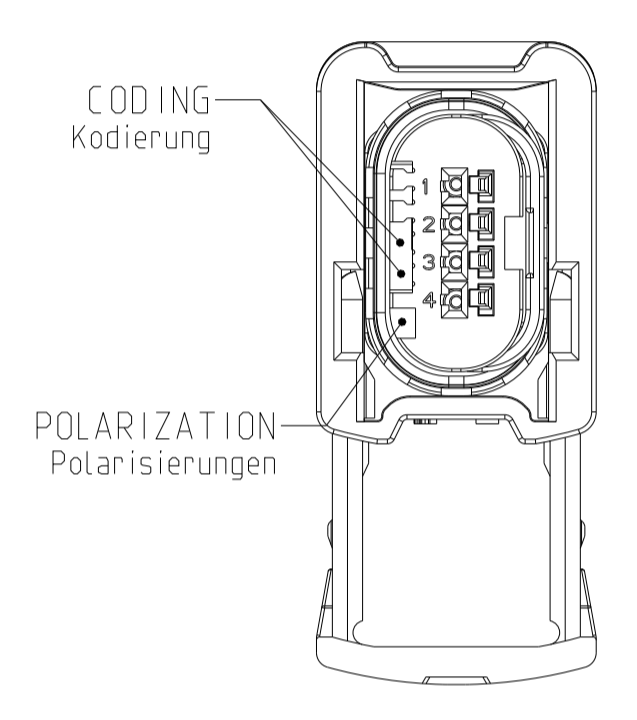


CODING B
Kodierung
PN 2-2366768-1

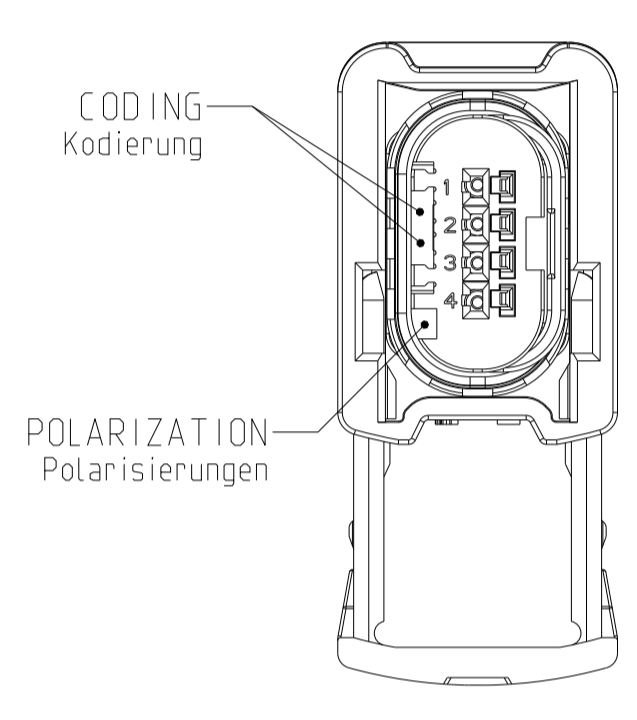


CODING C
Kodierung
PN 3-...-1

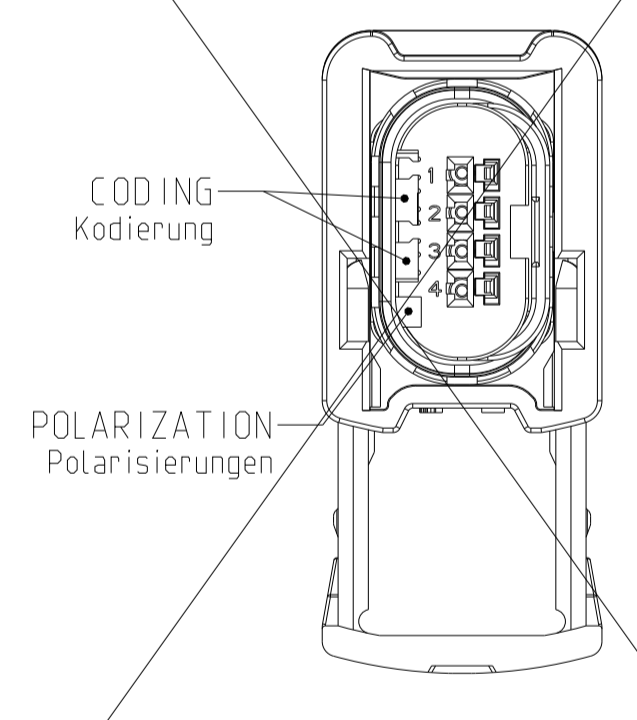


CODING D
Kodierung
PN 4-...-1

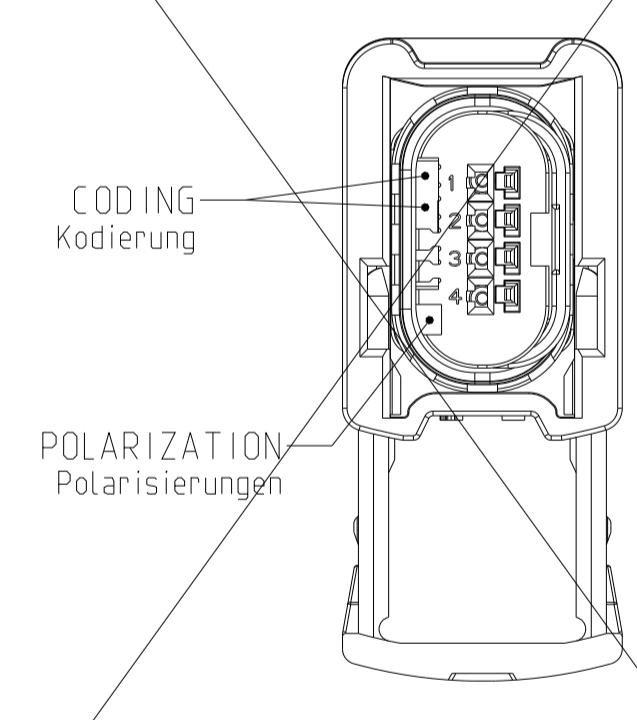

CODING E
Kodierung
PN 5-...-1

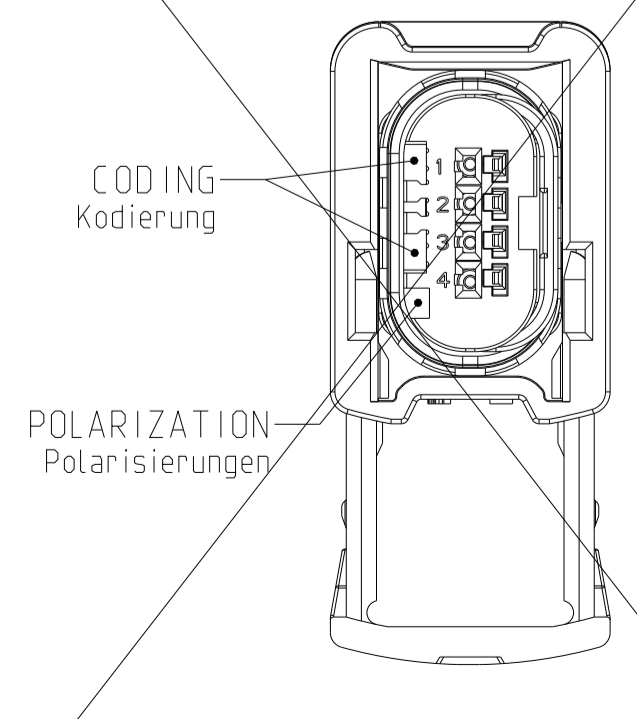

CODING F
Kodierung
PN 6-...-1

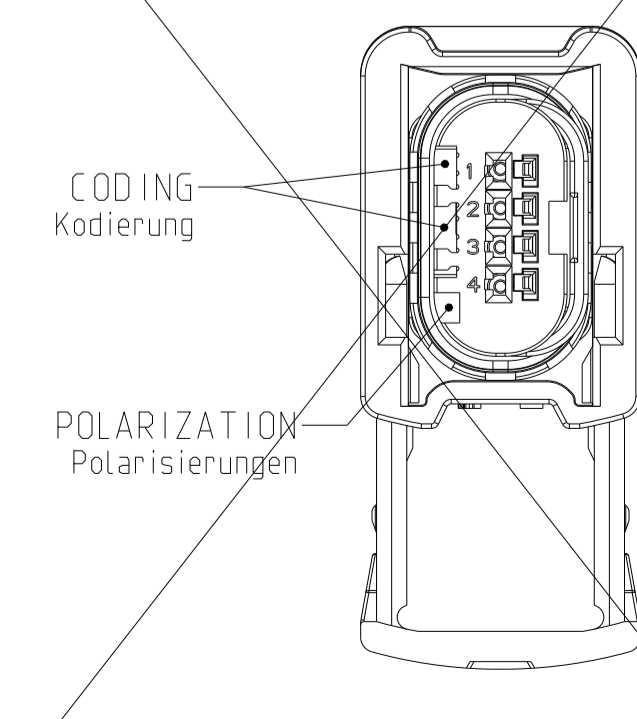

ITEM NO	DESCRIPTION	MATERIAL	COLOUR	DESCRIPTION
ITEM NO	Beschreibung	Farbe		Beschreibung
1	RECEPTACLE HSG Buchsenhaeuse	VMQ	WHITE	SEAL Dichtung
2	4POS. CAVITY BLOCK, CODE: "A" Appl. Kammerblock, Kodierung: "A"	PBT-GF30 / V-0	BLACK	schwarz
2	4POS. CAVITY BLOCK, CODE: "B" Appl. Kammerblock, Kodierung: "B"	PBT-GF30 / V-0	GREY	grau
2	4POS. CAVITY BLOCK, CODE: "C" Appl. Kammerblock, Kodierung: "C"	PBT-GF30 / V-0	GREEN	gruen
2	4POS. CAVITY BLOCK, CODE: "D" Appl. Kammerblock, Kodierung: "D"	PBT-GF30 / V-0	BLUE	blau
2	4POS. CAVITY BLOCK, CODE: "E" Appl. Kammerblock, Kodierung: "E"	PBT-GF30 / V-0	VIOLET	violett
2	4POS. CAVITY BLOCK, CODE: "F" Appl. Kammerblock, Kodierung: "F"	PBT-GF30 / V-0	RED	rot
3	FAMILY SEAL Sammelichtung	VMQ	LIGHT BLUE	Leicht blau
4	FAMILY SEAL RETAINER Familienringhalter	PBT-GF30 / V-0	BLACK	schwarz
5	4POS. CAVITY BLOCK, CODE: "A" Appl. Kammerblock, Kodierung: "A" ZACKEN, KONTAKTSICHERUNG	PBT-GF30 / V-0	YELLOW	gelb
6	U-SLIDE U-Schieber	PBT-GF30 / V-0	YELLOW	gelb
7	SEAL Dichtung	VMQ	WHITE	weiss

TE ORDER-NO. TE Bestell-Nr.	REV.	NO. OF POS. Polzahl	CODE Kodierung	COLOR OF CAVITY BLOCK Farbe des Kammerblocks	QUANTITY Stueck	ITEM NO ASSY
6-...-1	-	4	-	RED rot	1	6
5-...-1	-	4	-	VIOLET violett	1	5
4-...-1	-	4	-	BLUE blau	1	4
3-...-1	-	4	-	GREEN gruen	1	3
2-2366768-1	A	4	B	GREY grau	1	2
1-2366768-1	A	4	A	BLACK schwarz	1	1

DIMENSION AND TOLERANCES ACCORDING TO:
Bemaßungen und Toleranzen gemäß:

DIN ISO 20457
DIN EN ISO 8015 (M) - DIN EN ISO 291
DIN EN ISO 14405-1/-2/-3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED
0 PLC ±0.1	1 PLC ±0.1
2 PLC ±0.05	3 PLC ±0.05
4 PLC ±0.001	5 PLC ±0.001
ANGLES	FINISH
114-94662	SEE TABLE

OWN: Castlagna C. 04DEC2020
CHK: Granzow J. 07DEC2020
APVD: Eltved F. 07DEC2020

PRODUCT SPEC: 108-94794
APPLICATION SPEC: 114-94662

WEIGHT: 13.55 g

CUSTOMER DRAWING

NAME: 4POS.MCON 1.2,REC HSG ASSY.SLD
4pos. MCON 1.2 Buchsenhaeuse

SIZE: A | 00779 | C=2366768

RESTRICTED TO: SCALE 2:1 SHEET 1 OF 1 REV. A2