

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline E, Digital output device, IO-Link ports Class B: 1, connection method: M12 connector, A-coded, connection technology: 5-conductor, Digital outputs: 8, 24 V DC, 500 mA, connection technology: 3-conductor, Plastic housing, degree of protection: IP65/IP67

Product description

The Axioline E digital output device is connected to an IO-Link master via an IO-Link B-port. It is used to output digital signals via IO-Link. Use within different networks is possible via the IO-Link master.

Your advantages

- Connection to an IO-Link master with M12 connector (A-coded, 4-pos.)
- Type B port with additional power supply
- IO-Link specification V1.1.2
- Connection up to 8 outputs with M12 connectors (A-coded, 5-pos.)
- Diagnostic and status indicators
- Short-circuit and overload protection of the sensor supply
- Device rating plate stored
- IP65/IP67 degree of protection

Commercial data

Item number	2702659
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR04
Product key	DRI7DF
Catalog page	Page 180 (C-6-2019)
GTIN	4055626279695
Weight per piece (including packing)	302.5 g
Weight per piece (excluding packing)	302 g
Customs tariff number	85176200
Country of origin	DE

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Technical data

Dimensions

Dimensional drawing	
Width	60 mm
Height	141 mm
Depth	20 mm
Note on dimensions	The height is 170 mm including fixing clips. The depth is 30 mm including the connector.

Material specifications

Housing material	Pocan®
Color	anthracite grey RAL 7016

System properties

IO-Link	
Amount of process data	16 bit (Output data)

Input data

IO-Link	
Number of ports	1
Connection method	M12 connector, A-coded
Connection technology	5-conductor
Port type	Class B

Output data

Digital	
Output name	Digital outputs
Connection method	M12 connector
Connection technology	3-conductor
Number of outputs	8
Protective circuit	Overload protection, short-circuit protection of outputs; Electronic
Output voltage	24 V DC
Limitation of the voltage induced on circuit interruption	-28 V ... -15 V
Output current	max. 500 mA (per port) max. 4 A (per device)
Nominal output voltage	24 V DC (from voltage U_A)

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Load min.	10 kΩ
Output voltage when switched off	max. 1 V
Output current when switched off	max. 300 μA
Nominal load, inductive	max. 12 VA (1.2 H, 48 Ω, with nominal voltage)
Nominal load, lamp	max. 12 W (at nominal voltage)
Nominal load, ohmic	max. 12 W (48 Ω, with nominal voltage)
Switching frequency	max. 1000 per second
	max. 1 per second (with inductive load)
	max. 16 per second (with nominal lamp load)
Reverse voltage resistance to short pulses	limited protection up to 0.5 A for 1 s
Behavior with overload	Auto restart
Behavior with inductive overload	Output can be destroyed
Signal delay	max. 100 μs (when switched on)
	max. 100 μs (when switched off, with at least 50 mA load current)
Overcurrent shut-down	as of 0.7 A
Output current with ground connection interrupt when switched off	< 1 mA

Product properties

Type	Stand-Alone
Product type	I/O component
Product family	Axioline E

Electrical properties

Supply: IO-Link

Designation	IO-Link port supply (L+)
Nominal voltage for I/O supply	24 V DC (Provided via the IO-Link interface of the IO-Link master.)
Nominal current per device	approx. 15 mA
Protective circuit	Reverse polarity protection; yes
Permissible cable length	max. 20 m

Supply: Actuators

Designation	Supply of actuators (U_A)
Supply voltage	24 V DC (Nominal voltage)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current consumption	max. 500 mA (per port)
	max. 4 A (Device dependent; observe the current of the IO-Link master that is made available via U_A .)

Connection data

Connection method	M12 connector
Note on the connection method	in accordance with IEC 61076-2-101, M12 fast connection technology (SPEEDCON)

Environmental and real-life conditions

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Degree of protection	IP65/IP67
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	5 % ... 95 %
Permissible humidity (storage/transport)	5 % ... 95 %

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	Wall mounting
---------------	---------------


AXL E IOL DO8 M12 6P - Digital module

2702659

<https://www.phoenixcontact.com/us/products/2702659>


Drawings

Dimensional drawing

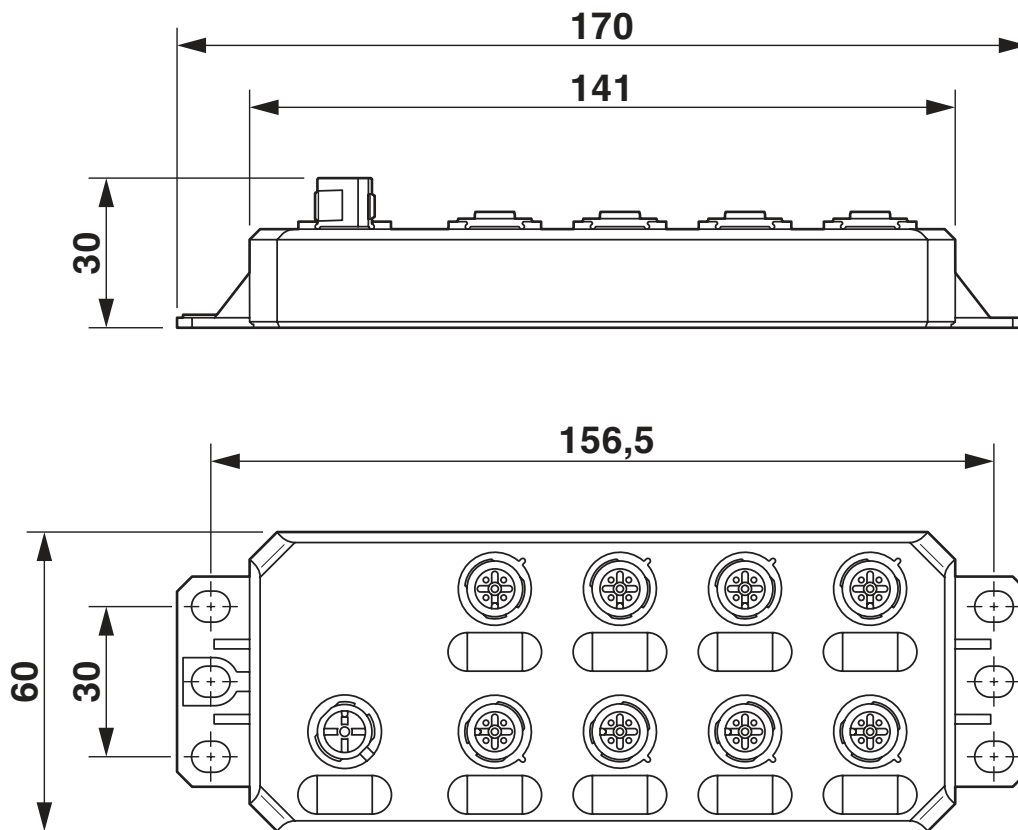

Dimensions (in mm)

Connection diagram

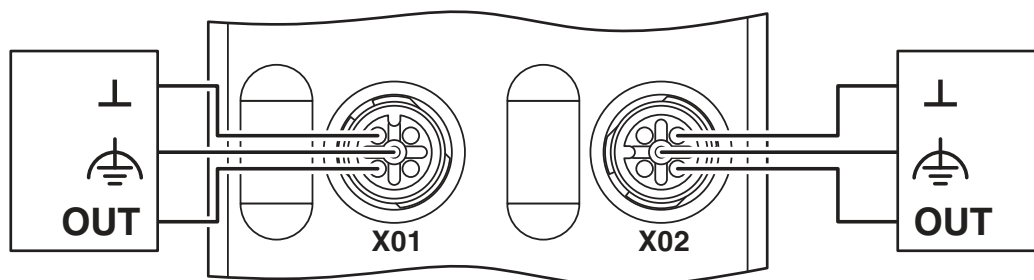

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2702659>



UL Listed

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705



UL Listed

Approval ID: FILE E 238705

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 8.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

AXL E IOL DO8 M12 6P - Digital module



2702659

<https://www.phoenixcontact.com/us/products/2702659>

Accessories

PROT-M12 - Screw plug

1680539

<https://www.phoenixcontact.com/us/products/1680539>



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors

UCT-EM (7X10) - Snap-in markers

0830765

<https://www.phoenixcontact.com/us/products/0830765>



Snap-in markers, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 7 x 10 mm, Number of individual labels: 30

AXL E IOL DO8 M12 6P - Digital module

2702659

<https://www.phoenixcontact.com/us/products/2702659>



IOL-CONF - Network management software

1083065

<https://www.phoenixcontact.com/us/products/1083065>



IOL-CONF is a browser-based configuration software tool for the easy startup of IO-Link masters and IO-Link devices

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com