
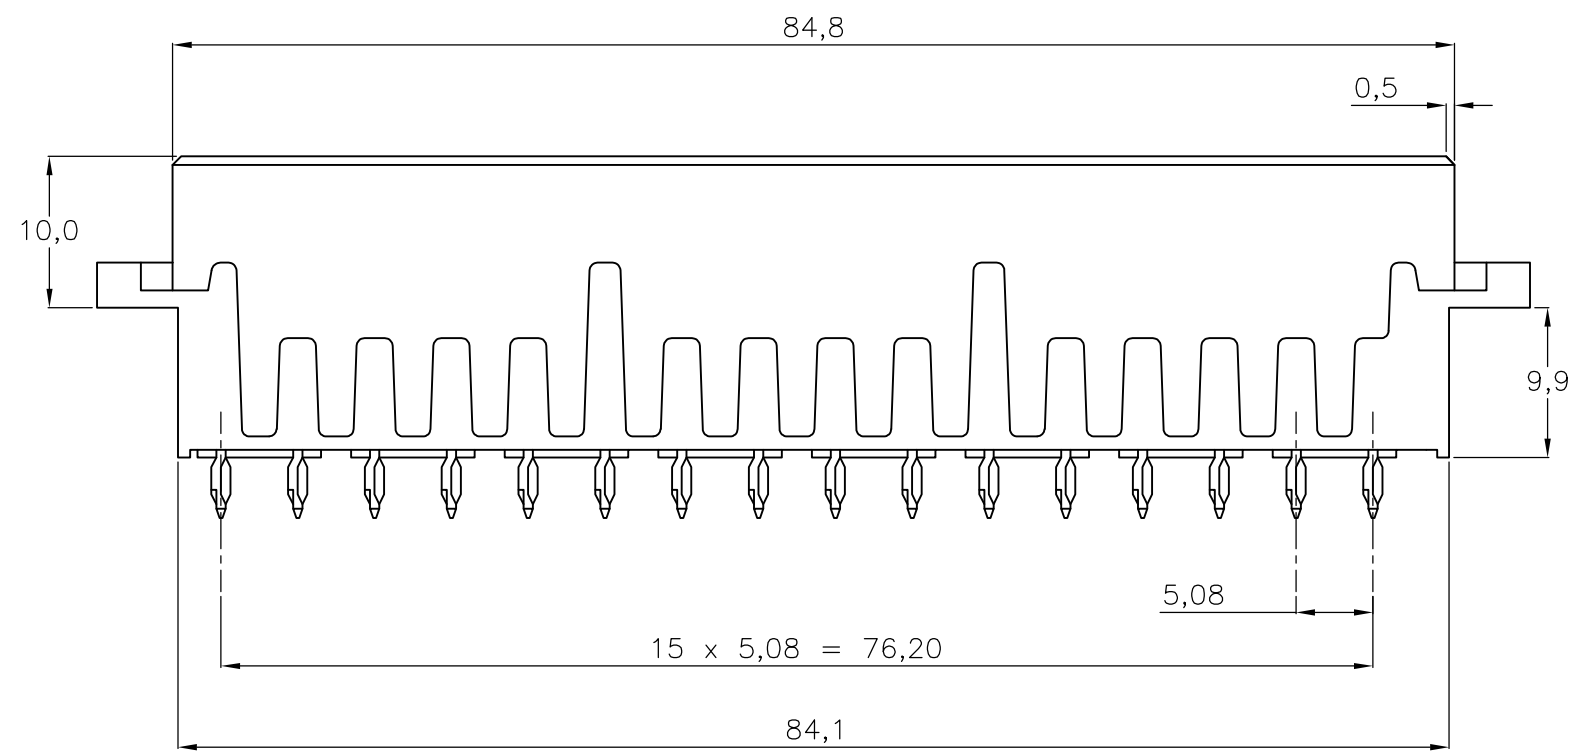
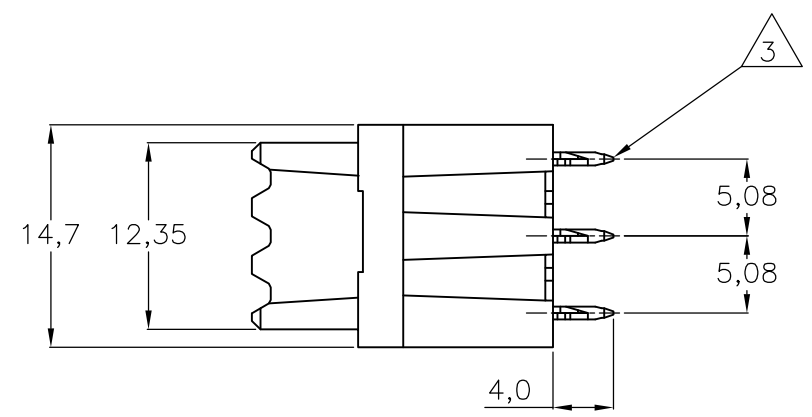


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-17-010024	13JUL2017	SY	SY

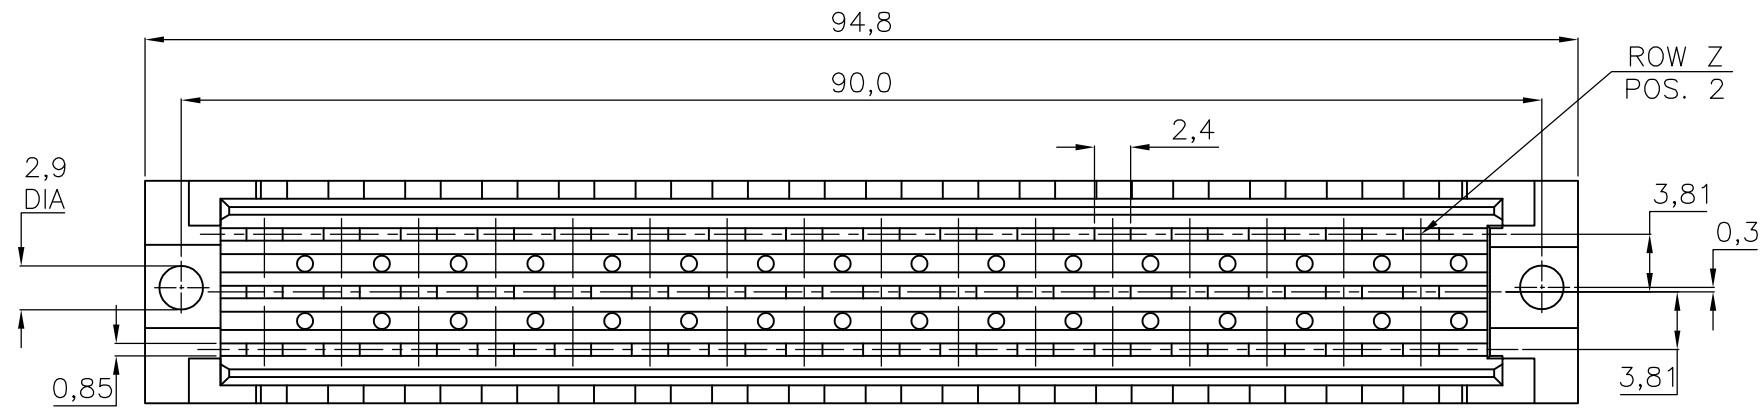

NOTES:

- 1 MATERIAL : - HOUSING : POLYESTER G.F.
COLOUR : GREY.
- CONTACTS : PHOSPHORBRONZE.
- 2 FINISH : -1 IEC 60603-2 PERFORMANCE LEVEL I OVER NICKEL IN CONTACT AREA, Sn OVER 1,25µm NI ON SOLDER POST.
-4 IEC 60603-2 PERFORMANCE LEVEL II OVER NICKEL IN CONTACT AREA, Sn OVER 1,25µm NI ON SOLDER POST.
-7 SAME AS -1 ONLY 2,0µm AU IN CONTACT AREA.
-8 SAME AS -1 ONLY 0,4µm AU IN CONTACT AREA.
- 3 FOR P.C.B.-THICKNESS 1,6-2,4

P.C.B. HOLE DIM. ACTION PIN	
DRILLED HOLE	: 1,15 ± 0,025 mm
FIN. HOLE	: 1,015 ± 0,075 mm
AFTER REFLOW	: 1,0 ± 0,09 mm
Cu-thks	: 0,05 ± 0,025 mm
SnPb-thks	: 0,007 ± 0,003 mm
Ref TE Spec.	: 106-14018/14019

ROW	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
z	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
b	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
d	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
POS	32	30	28	26	24	22	20	18	16	14	12	10	8	6	4	2

AN ASTERISK „X” DENOTES A CONTACT.

OBSOLETE	SEE NOTE	SEE NOTE	215334-8
OBSOLETE	2	1	215334-7
			215334-4
			215334-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.V.GRUNSVEN	21FEB86	STE TE Connectivity		
DIMENSIONS: mm		CHK	M.SPOOREN	21FEB86			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	L.V.SOEST	-	NAME		
0 PLC ± -		PRODUCT SPEC	-	-	3 x 16 POS. TYPE F FEMALE		
1 PLC ± -		APPLICATION SPEC	-	-	B.T.B. - A.P. CONNECTOR.		
2 PLC ± -		SIZE	A3	00779	CAGE CODE	C-215334	DRAWING NO
3 PLC ± -		WEIGHT	0.000000	-	RESTRICTED TO	-	-
4 PLC ± -		CUSTOMER DRAWING		SCALE	NTS	SHEET	1 OF 1
ANGLES ± -				REV	E		
FINISH							