


REV. 1 9/14/98

COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 20%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	16.0 VDC
MUST RELEASE	

ENVIRONMENT:	
VIBRATION	10 CPS TO 500 CPS @ 10 g's
SHOCK	30 g's 6 ± 1 MS. DURATION
TEMPERATURE	-55 °C TO +85 °C


NOTES: OPERATE & RELEASE 6 MS MAX.

CUSTOMER DATA SHEET

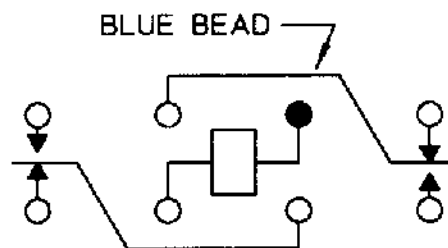

CONTACT RATING: LOW LEVEL TO 5A  
RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/26/98 CK. 9/14/98



CUST. C. I. I. STD.  
CUST. NO.

TYPE HFC5A RELAY

HFC5A1201K00