
	т	۵	<b>п</b>	m		0
--	---	---	----------	---	--	---





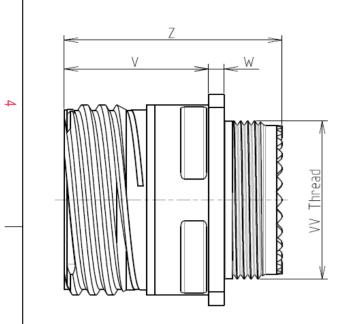

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 19.49 g ± 10%

8D 0

G

13

F

04

S

F

С

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g


ORIENTATION : C

CONTACT LAYOUT : 13-04

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

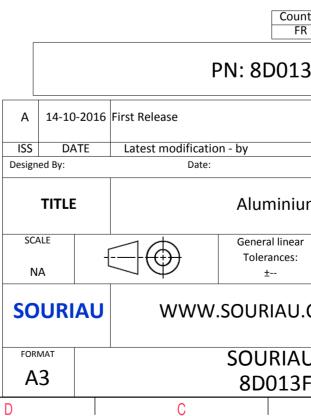

	Φ		A		
	R				4
AS EXAM	APLE				3
which er of the	does not co	by a third part	ÿ		
untry FR	Jurisd	iction & Cont Not Listed	rol List	]	2
.3F0	4SC				
		CUSTOME	R DRAWING	MOD N°	
um Receptacle 8D series					
ar			PROJECT 59		1
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
UDRG N° SHEET F04SC-C 1/2					
04	B		A	-, <del>-</del>	J

-	т	۵	н <b>т</b>	m		0	
		Contact Layout					Panel Cutout
4	-	x $( \begin{array}{c} \begin{array}{c} & & \\ & \\ & \\ & \\ \end{array} \end{array} \right) $ $( \begin{array}{c} \\ & \\ \\ \\ \end{array} \right) $ $( \begin{array}{c} \\ \\ \\ \\ \\ \end{array} \right) $ $( \begin{array}{c} \\ \\ \\ \\ \end{array} \right) $ $( \begin{array}{c} \\ \\ \\ \\ \end{array} \right) $ $( \begin{array}{c} \\ \\ \\ \\ \\ \end{array} \right) $ $( \begin{array}{c} \\ \\ \\ \\ \\ \\ \end{array} \right) $ $( \begin{array}{c} \\ \\ \\ \\ \\ \\ \\ \end{array} \right) $			ħ	SQUARE FLANGE RECEPTACLE (TYPE ( REAR MOUNTING	)
	Conta position A B C D Shell Arrangement N size no. N 13 -4	n ID         (mm)         (mm)           + .000 (0.00)         +.150 (3.81)           + .146 (3.71)         +.035 (0.89)           + .000 (0.00)         -083 (2.11)          146 (3.71)         +.036 (0.89)			22 -		ØI
ω						Ø Ø/ R	im SA AA S1 ST
	+					SOURIAU shall not be due to a use of the	e Products whi
N						the Specifications issue (professional r	
					A 14-10-20	PN:	8D013F
					ISS DATE Designed By:		/
					SCALE		eneral linear Tolerances:
-					SOURIA	U www.so	± URIAU.C
					FORMAT A3		DURIAU 3D013F0
	Н	G	F	E	D	C	

