




Elongated Thread Available Upon Request

| Hex Plugs: Nickel Plated Brass   |                                   |                                   | Thread Type & Size           | Dimensions Inches (mm) |             |               |
|----------------------------------|-----------------------------------|-----------------------------------|------------------------------|------------------------|-------------|---------------|
| Part Numbers                     |                                   |                                   |                              | H                      | F           | TL            |
| -4°F to 203°F<br>(-20°C to 95°C) | -4°F to 356°F<br>(-20°C to 180°C) | -4°F to 356°F<br>(-20°C to 180°C) |                              | Overall Height         | Wrench Flat | Thread Length |
|                                  |                                   |                                   | See page 56 for thread specs |                        |             |               |
| without O-Ring                   | w/ Buna-N O-Ring                  | w/ FKM O-Ring                     |                              |                        |             |               |
| HP-07-BR                         | HP-07-BR-B                        | HP-07-BR-V                        | PG 7 / 1/4" NPT              | .31 (8)                | .55 (14)    | .20 (5)       |
| HP-09-BR                         | HP-09-BR-B                        | HP-09-BR-V                        | PG 9                         | .35 (9)                | .67 (17)    | .24 (6)       |
| HP-11-BR                         | HP-11-BR-B                        | HP-11-BR-V                        | PG 11                        | .37 (9.5)              | .79 (20)    | .24 (6)       |
| HP-13-BR                         | HP-13-BR-B                        | HP-13-BR-V                        | PG 13 / 13.5                 | .39 (10)               | .87 (22)    | .26 (6.5)     |
| HP-16-BR                         | HP-16-BR-B                        | HP-16-BR-V                        | PG 16                        | .39 (10)               | .94 (24)    | .26 (6.5)     |
| HP-21-BR                         | HP-21-BR-B                        | HP-21-BR-V                        | PG 21                        | .41 (10.5)             | 1.18 (30)   | .28 (7)       |
| HP-29-BR                         | HP-29-BR-B                        | HP-29-BR-V                        | PG 29                        | .49 (12.5)             | 1.61 (41)   | .31 (8)       |
| HP-36-BR                         | HP-36-BR-B                        | HP-36-BR-V                        | PG 36                        | .51 (13)               | 1.97 (50)   | .31 (8)       |
| HP-42-BR                         | HP-42-BR-B                        | HP-42-BR-V                        | PG 42                        | .59 (15)               | 2.28 (58)   | .35 (9)       |
| HP-48-BR                         | HP-48-BR-B                        | HP-48-BR-V                        | PG 48                        | .65 (16.5)             | 2.56 (65)   | .39 (10)      |
| HM-12-BR                         | HM-12-BR-B                        | HM-12-BR-V                        | M12 x 1.5                    | .37 (9.5)              | .55 (14)    | .26 (6.5)     |
| HM-16-BR                         | HM-16-BR-B                        | HM-16-BR-V                        | M16 x 1.5                    | .35 (9)                | .75 (19)    | .24 (6)       |
| HM-20-BR                         | HM-20-BR-B                        | HM-20-BR-V                        | M20 x 1.5                    | .37 (9.5)              | .87 (22)    | .24 (6)       |
| HM-25-BR                         | HM-25-BR-B                        | HM-25-BR-V                        | M25 x 1.5                    | .41 (10.5)             | 1.18 (30)   | .28 (7)       |
| HM-32-BR                         | HM-32-BR-B                        | HM-32-BR-V                        | M32 x 1.5                    | .49 (12.5)             | 1.61 (41)   | .31 (8)       |
| HM-40-BR                         | HM-40-BR-B                        | HM-40-BR-V                        | M40 x 1.5                    | .51 (13)               | 1.81 (46)   | .31 (8)       |
| HM-50-BR                         | HM-50-BR-B                        | HM-50-BR-V                        | M50 x 1.5                    | .59 (15)               | 2.17 (55)   | .35 (9)       |
| HM-63-BR                         | HM-63-BR-B                        | HM-63-BR-V                        | M63 x 1.5                    | .65 (16.5)             | 2.76 (70)   | .39 (10)      |



O-Ring needed for Type NEMA 4x & 6 Rating.



**Also, all Nickel Plated Brass & Stainless Steel HM (Hex) Hole Plugs are available with Ex-d approval!**

Hex Plugs also available with the following approvals:



ATEX

www.SealconEX.com


## Accessories - (Hex) Hole Plugs (303) Stainless Steel - PG & Metric Threads

| Hex Plugs: (303) Stainless Steel - IP 68 |                                   |                                    | Thread Type & Size           | Dimensions Inches (mm) |             |               |
|--|-----------------------------------|------------------------------------|------------------------------|------------------------|-------------|---------------|
| Part Numbers                             |                                   |                                    |                              | H                      | F           | TL            |
| -4°F to 203°F<br>(-20°C to 95°C)         | -4°F to 356°F<br>(-20°C to 180°C) | -76°F to 356°F<br>(-60°C to 180°C) |                              | Overall Height         | Wrench Flat | Thread Length |
|  |                                   |                                    | See page 56 for thread specs |                        |             |               |
| w/ Buna-N O-Ring                         | w/ FKM O-Ring                     | w/ Silicone O-Ring                 |                              |                        |             |               |
| HP-07-SS-B                               | HP-07-SS-V                        | HP-07-SS-S                         | PG 7 / 1/4" NPT              | .31 (8)                | .55 (14)    | .20 (5)       |
| HP-09-SS-B                               | HP-09-SS-V                        | HP-09-SS-S                         | PG 9                         | .35 (9)                | .67 (17)    | .24 (6)       |
| HP-11-SS-B                               | HP-11-SS-V                        | HP-11-SS-S                         | PG 11                        | .37 (9.5)              | .79 (20)    | .24 (6)       |
| HP-13-SS-B                               | HP-13-SS-V                        | HP-13-SS-S                         | PG 13 / 13.5                 | .39 (10)               | .87 (22)    | .26 (6.5)     |
| HP-16-SS-B                               | HP-16-SS-V                        | HP-16-SS-S                         | PG 16                        | .39 (10)               | .94 (24)    | .26 (6.5)     |
| HP-21-SS-B                               | HP-21-SS-V                        | HP-21-SS-S                         | PG 21                        | .41 (10.5)             | 1.18 (30)   | .28 (7)       |
| HP-29-SS-B                               | HP-29-SS-V                        | HP-29-SS-S                         | PG 29                        | .49 (12.5)             | 1.61 (41)   | .31 (8)       |
| HP-36-SS-B                               | HP-36-SS-V                        | HP-36-SS-S                         | PG 36                        | .51 (13)               | 1.97 (50)   | .31 (8)       |
| HM-12-SS-B                               | HM-12-SS-V                        | HM-12-SS-S                         | M12 x 1.5                    | .37 (9.5)              | .55 (14)    | .26 (6.5)     |
| HM-16-SS-B                               | HM-16-SS-V                        | HM-16-SS-S                         | M16 x 1.5                    | .35 (9)                | .75 (19)    | .24 (6)       |
| HM-20-SS-B                               | HM-20-SS-V                        | HM-20-SS-S                         | M20 x 1.5                    | .37 (9.5)              | .87 (22)    | .24 (6)       |
| HM-25-SS-B                               | HM-25-SS-V                        | HM-25-SS-S                         | M25 x 1.5                    | .41 (10.5)             | 1.18 (30)   | .28 (7)       |
| HM-32-SS-B                               | HM-32-SS-V                        | HM-32-SS-S                         | M32 x 1.5                    | .49 (12.5)             | 1.61 (41)   | .31 (8)       |
| HM-40-SS-B                               | HM-40-SS-V                        | HM-40-SS-S                         | M40 x 1.5                    | .51 (13)               | 1.81 (46)   | .31 (8)       |



These Plugs are designed to fit and seal European PG threads per DIN 46320-FS/PA and Metric threads per DIN 46320/Ms.

They are made of Stainless Steel and are available with Buna-N, FKM or Silicone O-Ring. Also available in Nylon, Nickel Plated Brass, or 316L Stainless Steel. (Elongated Available Upon Request).

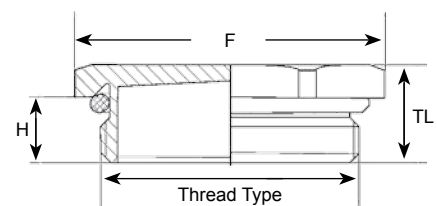

Hex Plugs also available with the following approvals:



ATEX

www.SealconEX.com



Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.

For Material Specifications and Approval Information refer to page 52.