


REV. 0
DCO 14972

| | |
|-----------------|----------------|
| COIL: @ +25 °C | |
| RESISTANCE | 520 OHMS ± 10% |
| NOMINAL VOLTAGE | 18.0 VDC |
| MUST OPERATE | 9.5VDC |
| MUST RELEASE | 0.95 VDC |

CUSTOMER DATA SHEET

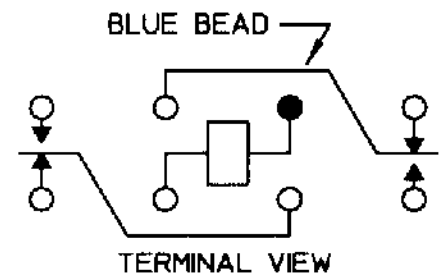

ENVIRONMENT:

| | | | | | | |
|-------------|-----|--------|------|--------------|----|-----|
| VIBRATION | 10 | CPS TO | 2000 | CPS @ | 20 | g's |
| SHOCK | 100 | g's | 6 | MS. DURATION | | |
| TEMPERATURE | -65 | °C TO | +125 | °C | | |

CONTACT RATING: LOW LEVEL TO 4A
28 VDC RESISTIVE 100,000
OPERATIONS MIN.

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

DR. R.B. 12/7/98 CK. *[Signature]* 12/7/98



CUST. C. I. I. STD.
CUST. NO.

TYPE HFW4A RELAY

HFW4A1201J00