




Specification for:  
**0P48613TC**

110 Delta Drive  
 Pittsburgh, PA 15238  
 Phone: 412/696-1333  
 Fax: 412/696-0333  
 Email:magnetics@spang.com

**DIMENSIONS**

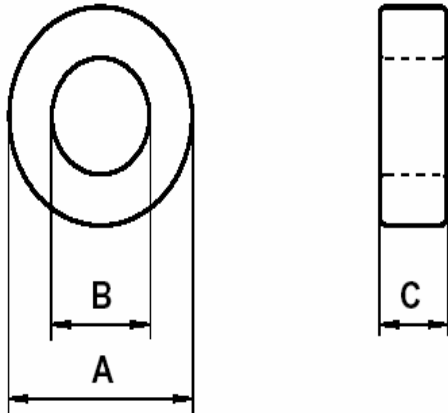

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	85.7	84.4	87.0
I.D. (B)	55.5	54.28	56.72
Ht. (C)	12.7	12.44	12.96

Eff. Parameters		
A <sub>e</sub> mm <sup>2</sup>	l <sub>e</sub> mm	V <sub>e</sub> mm <sup>3</sup>
188.8	214.9	40582

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
2726 ± 25%	10kHz, 0.5 mT (For N = 5, use 0.8 mA), 25°C

**CORE LOSSES**

P <sub>L</sub> max	Production lot limit Max avg	Test conditions
5640 mW (139 mW/cm <sup>3</sup> )	5154 mW (127 mW/cm <sup>3</sup> )	100 kHz, 100 mT, 100°C
-	-	-

**COATING**

Uncoated
----------

**NOTE**

Spec. Modifications	Previous	Revised
2006.01.11	Losses: General P material	Losses: Detail as indicated