


# RDMHP LED multifunction beacon High Performance


- 110 mm Ø large modular LED multifunctional beacon high performance
- outstanding light intensity and excellent signal effect
- up to 184 Cd luminous intensity (colour-dependent)
- strobe/flashing/rotating/pulsing/dimming and steady-light functions
- 7 light functions externally controllable
- a total of 15 different operating modes in 4 groups
- high protection class IP66 & impact resistance IK08
- base modules for all required mounting types
- can be combined with 32-tone sounder
- extensive accessories (mounting brackets, seals, cable glands)
- for industrial and general applications

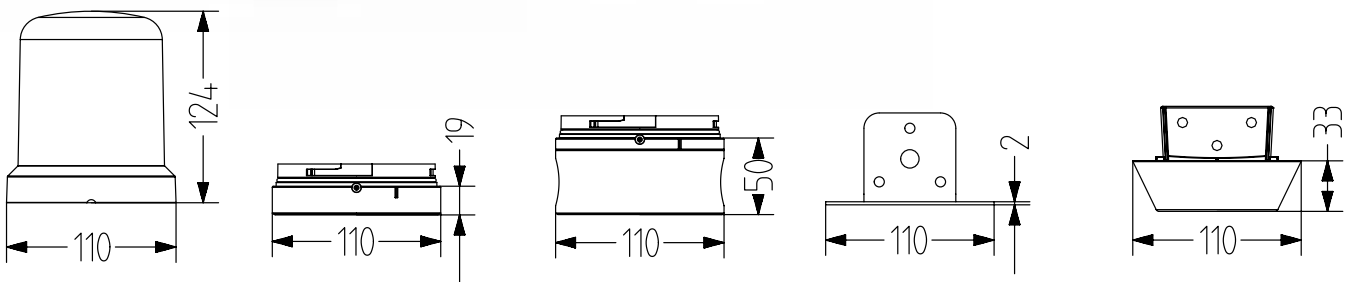

## TECHNICAL DATA

Size	110 mm
Housing	Polycarbonate
Lens	Polycarbonate, ribbed inside amber, red, clear, blue, green or yellow
Type of mounting	Any, conduit mounting
Cable entry	Depending on the base, grommet or cable gland (cable entry from below and from the side)
Connection technology	Screw terminal
Leakage current	3mA

Beacon type	Multifunction beacon
Light source	LED (12x6 LEDs)
Duty cycle	100 %
Service life	Light source > 50.000 h
Operating temperature	-30 / +60°C
Degree of protection	IP66, UL Type 4, 4X, 13
Impact resistance	IK08



# RDMHP

## ORDER DATA

Type	12 V DC	24VAC/DC	48VAC/DC	110-240VAC	Lens colour	Nominal voltage	Voltage range (V)	Nominal current	
RDMHP	850521004				amber	12VDC	+/-10%	4,18A	
	850522004				red	12VDC	+/-10%	2,6A	
	850524004				clear	12VDC	+/-10%	4,18A	
	850525004				blue	12VDC	+/-10%	4,18A	
	850526004				green	12VDC	+/-10%	4,18A	
	850527004				yellow	12VDC	+/-10%	4,18A	
		850521405				amber	24VAC/DC	+/-10%	1,8A
		850522405				red	24VAC/DC	+/-10%	1,7A
		850524405				clear	24VAC/DC	+/-10%	1,8A
		850525405				blue	24VAC/DC	+/-10%	1,8A
		850526405				green	24VAC/DC	+/-10%	1,8A
		850527405				yellow	24VAC/DC	+/-10%	1,8A
			850521408			amber	48VAC/DC	+/-10%	1,37A
			850522408			red	48VAC/DC	+/-10%	830mA
			850524408			clear	48VAC/DC	+/-10%	1,37A
			850525408			blue	48VAC/DC	+/-10%	1,37A
			850526408			green	48VAC/DC	+/-10%	1,37A
			850527408			yellow	48VAC/DC	+/-10%	1,37A
				850521313		amber	110/120/230/240VAC	+/-10%	520mA
				850522313		red	110/120/230/240VAC	+/-10%	430mA
				850524313		clear	110/120/230/240VAC	+/-10%	520mA
				850525313		blue	110/120/230/240VAC	+/-10%	520mA
				850526313		green	110/120/230/240VAC	+/-10%	520mA
				850527313		yellow	110/120/230/240VAC	+/-10%	520mA



RBA



RBL



RBH



RBNPT

## BASEN

Type	Type of product	24-48 V AC/DC	110-240 V AC
RBA	Audible base for R series beacons	850535408	850535313
RBL	Standard base for horizontal mounting		850500900
RBH	Universal base for horizontal and pole mounting		850510900
RBNPT	Universal base for NPT 1/2" conduit mounting		850515900



RWD



RWU



RWA



RG1



RG2



AKV



RKV

## ACCESSORIES

Type	Type of accessory	Order number
RWD	Design bracket for wall mounting of R-series beacons	850520900
RWU	Metal bracket for wall mounting of R-series beacons	850521900
RWA	Metal bracket for audible bases	850531900
RG1	Flat gasket for R-series bases to seal on smooth enclosures	850590900
RG2	Flat gasket for vertical mounting of RWD design bracket	850590910
AKV	Cable gland M20 for N/M/R-series, CT5, multitone sirens A and/or beacons Q	698800026
RKV	Cable gland M16 for R series bases	850590920