

Connector Location A

Connector Location B

Ha-VIS preLink terminal block AWG 24-28


X

preLink protection cover (closed)

Copper foil


a

Ø6,4

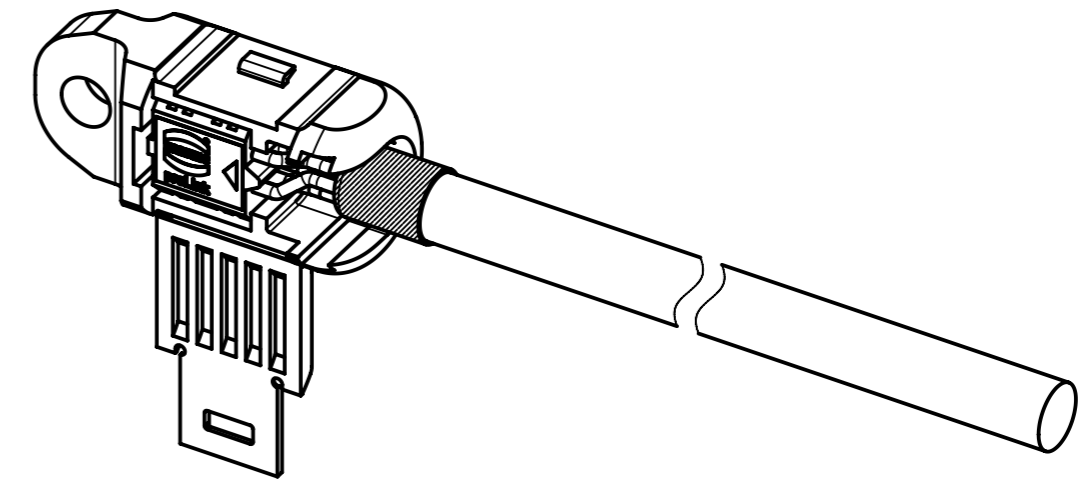


- Protection level: IP20
- Temperature range:
 - Fixed installation: -30°C ...+75°C
 - Dynamic installation: -5°C ...+50°C

X
(without preLink protection cover)



Loading Plan acc. to TIA/EIA 568B

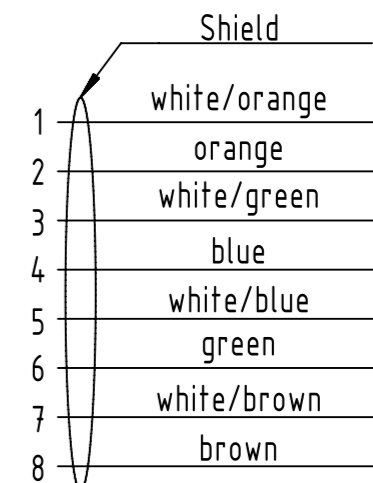

4x2xAWG 26/7, S/FTP, PUR, Cat.7, yellow

Cont. no.	Part no.	Type of cable	Dim. a[m]
10	20826001100	4x2xAWG 26/7, S/FTP, PUR, Cat.7, yellow	10
9	20826001050		5
8	20826001040		4
7	20826001030		3
6	20826001020		2
5	20826001010		1
4	20826001008		0.8
3	20826001006		0.6
2	20826001004		0.4
1	20826001002		0.2

	All rights reserved		Created by BANIUD Banciu		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean		Date 2019-11-19		State Final Release	
	Department HCS - RO		Title System cable preLink 1x terminal module				Doc-Key / ECM-Nr. 100209218/UGD/004/C 500000160481		Rev. C		Page 1/1	
HARTING Customised Solutions D-32339 Espelkamp			Type TB	Number 20826001XXX			According to production drawing					