


COLOR CODING	
1	RED
2	GREEN
3	BLUE
4	YELLOW
5	WHITE
6	GRAY
7	BROWN
8	VIOLET

DESCRIPTION: POF 8-FIBER CABLE, P980/1000, Ø10MM, PUR, BLACK, 500M

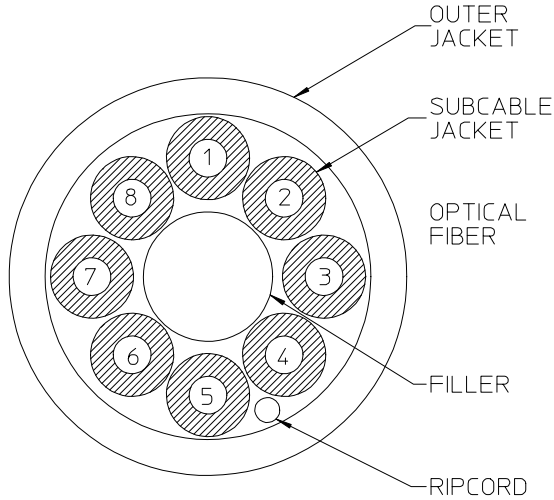

CORE MATERIAL	POLYMETHYL METHACRYLATE (PMMA)
CLADDING MATERIAL	FLUORINATED POLYMER
NUMERICAL APERTURE	0.5
REFRACTIVE INDEX PROFILE	STEP INDEX
NUMBER OF FIBERS	8
CORE DIAMETER (TYPICAL)	980±60 µm
CLADDING DIAMETER (TYPICAL)	1000±60 µm
SUBCABLE JACKET MATERIAL	POLYETHYLENE (PE)
SUBCABLE JACKET COLOR	RED, GREEN, BLUE, YELLOW, WHITE, GRAY, BROWN, VIOLET
SUBCABLE JACKET DIAMETER	2.2±0.07 mm
OUTER JACKET MATERIAL	THERMOPLASTIC POLYURETHANE (PUR), HALOGEN FREE
OUTER JACKET COLOR	BLACK
OUTER JACKET DIAMETER	10.0±0.3 mm
STRANDING	8 POF ELEMENTS STRANDED OVER CENTRAL FILLER (Ø3.5mm)
COVERING	PLASTIC TAPE WITH UNDERLYING RIPCORD
APPROXIMATE WEIGHT	81 kg/km
TRANSMISSION LOSS (20°C) @650nm	nom. 200 dB/km max. 10 dB/19.5m min. 10 MHz x 100m
BANDWIDTH	min. 10 MHz x 100m
MINIMUM BEND RADIUS (CABLE)	approx. 7.5 X cable diameter
PULLING FORCE	max. 100 N in operation
CRUSH STRENGTH	max. 100 N/cm
OIL RESISTANCE	GOOD
STORAGE TEMPERATURE	-40°C to +70°C
OPERATION TEMPERATURE	-40°C to +70°C
INSTALLATION TEMPERATURE	+5°C to +70°C
STANDARDISATION	CATEGORY A4a. acc. IEC-60793-2-40

NOTE:
1. PACKAGING: 500M REEL.

ENTER DESCRIPTION EC NO: MF2015-0582 DRWN: SBOJANIC 2015/07/07 CHKD: APPR: IGUMIN 2015/07/14 REV A	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>2 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr> <tr><td>0 PLACE</td><td>± ---</td><td>± ---</td></tr> </tbody> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± ---	± ---	1 PLACE	± ---	± ---	0 PLACE	± ---	± ---	DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH																					
	4 PLACES	± ---	± ---																					
	3 PLACES	± ---	± ---																					
	2 PLACES	± ---	± ---																					
1 PLACE	± ---	± ---																						
0 PLACE	± ---	± ---																						
		<table border="1"> <thead> <tr> <th>DRAWN BY</th> <th>DATE</th> <th>TITLE</th> </tr> </thead> <tbody> <tr> <td>SBOJANIC</td> <td>2015/07/07</td> <td>POF 8-FIBER CABLE, 10MM, PUR, BLACK, 500M</td> </tr> <tr> <th>CHECKED BY</th> <th>DATE</th> <td></td> </tr> </tbody> </table>	DRAWN BY	DATE	TITLE	SBOJANIC	2015/07/07	POF 8-FIBER CABLE, 10MM, PUR, BLACK, 500M	CHECKED BY	DATE														
DRAWN BY	DATE	TITLE																						
SBOJANIC	2015/07/07	POF 8-FIBER CABLE, 10MM, PUR, BLACK, 500M																						
CHECKED BY	DATE																							
		<table border="1"> <thead> <tr> <th>APPROVED BY</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td>IGUMIN</td> <td>2015/07/14</td> </tr> </tbody> </table>	APPROVED BY	DATE	IGUMIN	2015/07/14																		
APPROVED BY	DATE																							
IGUMIN	2015/07/14																							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. 1062083035	DOCUMENT NO. SD-106208-3035	SHEET NO. 1 OF 1																			
			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				