

# Type LPS-08-L (Left Hand Exit) “Add-On” Automotive Fuse Holder Mini Automotive Low Profile Blade Type Fuse




www.optifuse.com


(619) 593-5050

Rating: 58VDC  
 Max Combined Current - Both Circuits - 30A  
 Max Primary Circuit - 25A  
 Max Auxiliary Circuit - 15A

Body Material: Nylon PA66 UL94V-0  
 Terminals: Tin plated Brass  
 For use with Type APM Fuse (Miniature Automotive Blade Type)  
 Wire: 16 AWG Red Wire, UL1015 105°C  
 Connector: Butt-Splice Connector

### Mechanical Dimensions: Inches [mm]

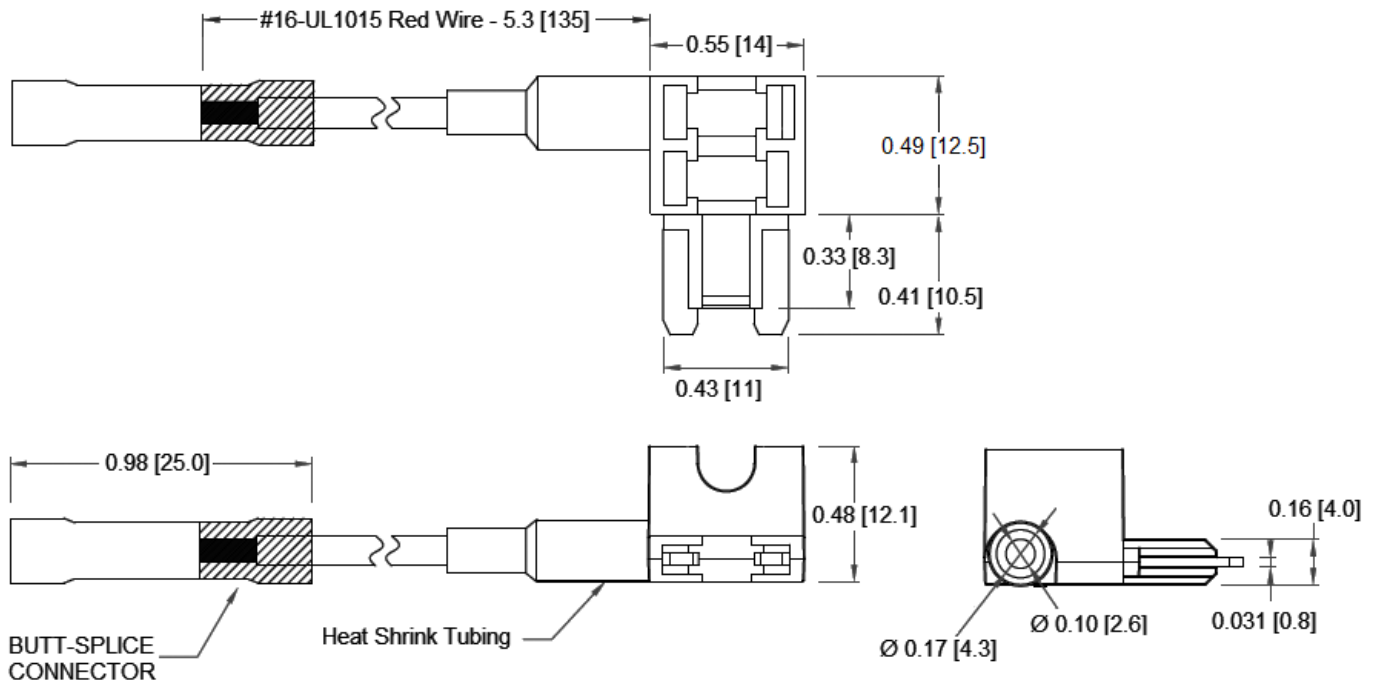

<p><b>Warning:</b></p> 	<ul style="list-style-type: none"> <li>-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</li> <li>-Device is intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.</li> <li>-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.</li> </ul>
--	--