
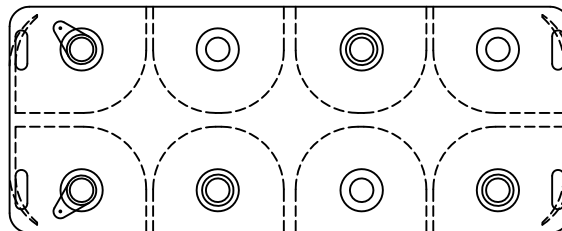
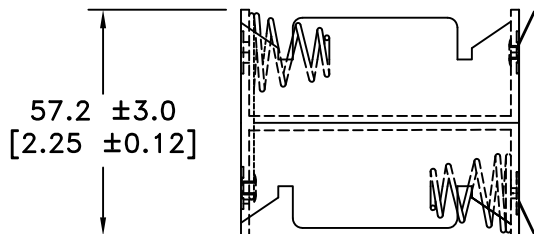


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/02/07	A	ADDED "ROHS COMPLIANT" UPDATED NOTES	T.B.	B.S.	
8/01/14	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/31/17	C	ADDED MOUNTING HOLES Ø3.50	T.B.	B.S.	

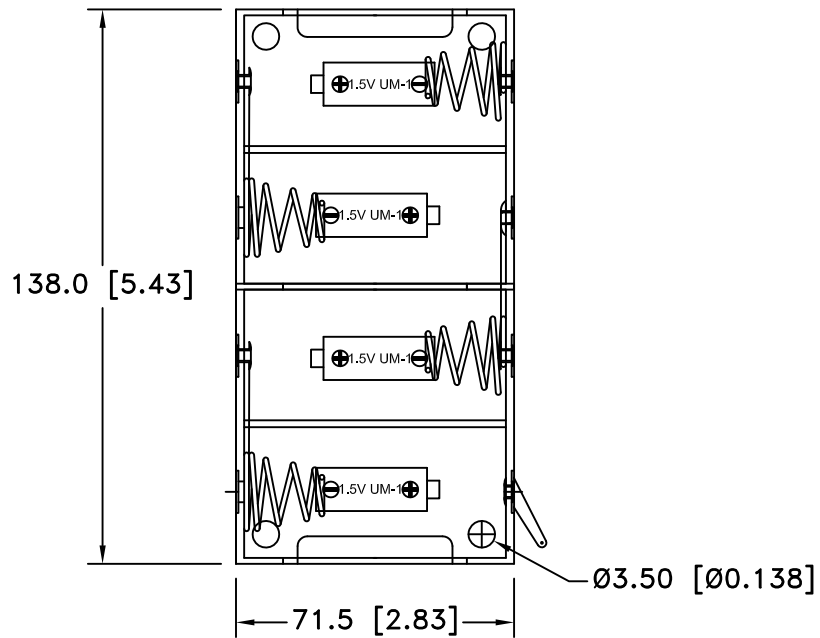


NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKLE PLATED.
 SPRING: SPRING STEEL, NICKLE PLATED.
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000

ROHS 2 COMPLIANT.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title EIGHT "D" CELL HOLDER WITH SOLDER LUGS		
Fractional ± .8 (.030)			
Angular ± 3°	Date 03/31/17	Drawing Number BH48DL	