
647676-2 - ACTIVE

### **Economy Power**

TE Internal #: 647676-2 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, 3.96 mm [.156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power

### View on TE.com >

#### Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

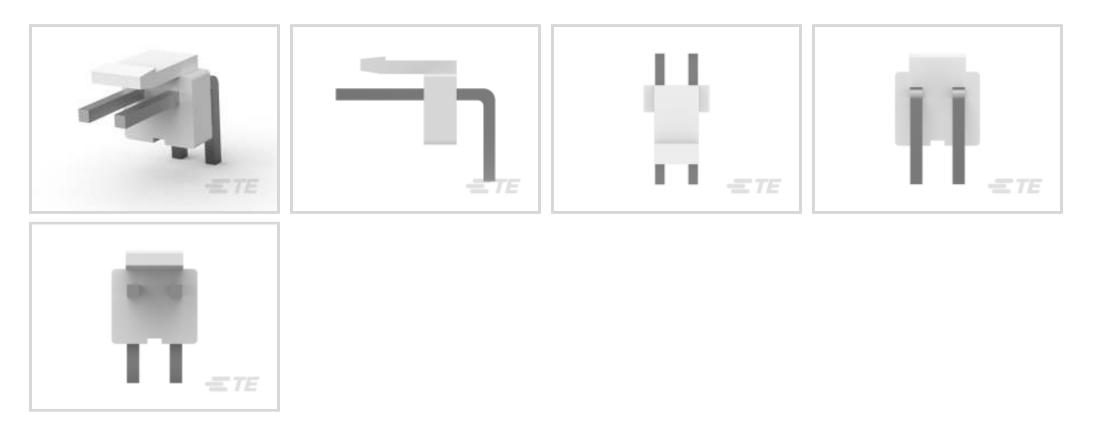

Rectangular Power Connector Type: Header

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 2

Centerline (Pitch): 3.96 mm [.156 in ]

# Features

**E** 

### Product Type Features

Header Type	Partially Shrouded Header			
Rectangular Power Connector Type				
Connector & Housing Type	Plug			
Connector System	Wire-to-Board			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
Configuration Features				
Number of Positions	2			
	Right Angle, Vertical			
PCB Mount Orientation	Right Angle, Vertical			
PCB Mount Orientation Number of Power Positions	Right Angle, Vertical 2			
Number of Power Positions				
Number of Power Positions Number of Rows				

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Connector Profile	Low		
Contact Features			
Mating Post Length	8.6 mm[.33 in]		
Contact Layout	Inline		
Contact Mating Area Plating Material	Tin		
Contact Base Material	Brass		
Contact Current Rating (Max)	7.5 A		
Contact Retention Within Housing	Without		
Contact Type	Pin		
PCB Contact Termination Area Plating Material	Tin		
Contact Mating Area Plating Material Thickness	2.03 μm[80 μin]		
Termination Features			
Termination Post & Tail Length	5.34 mm[.21 in]		
Termination Method to Printed Circuit Board	Through Hole - Solder		
Mechanical Attachment			
Mating Retention	With		
Mating Alignment	With		
PCB Mount Alignment	Without		
PCB Mount Retention	Without		
Mating Retention Type	Latch		
Connector Mounting Type	Board Mount		
Housing Features			
Centerline (Pitch)	3.96 mm[.156 in]		
Housing Color	White		
Housing Material	Nylon 66		
Dimensions			
Connector Height	9.4 mm[.37 in]		
Product Width	15.37 mm[.605 in]		
Product Length	7.92 mm[.312 in]		
Usage Conditions			
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]		
Operation/Application			

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Circuit Application	Power				
Industry Standards					
UL Flammability Rating	UL 94V-0				
Glow Wire Rating	Standard Part - Not Glow Wire				
Packaging Features					
Packaging Quantity	1000				
Packaging Method	Bag				
Product Compliance					
For compliance documentation, visit the product page on TE.com>					
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant				
For compliance documentation, visit the product page on TE.com>	Compliant Compliant				
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU					
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant				

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power






# Also in the Series Economy Power

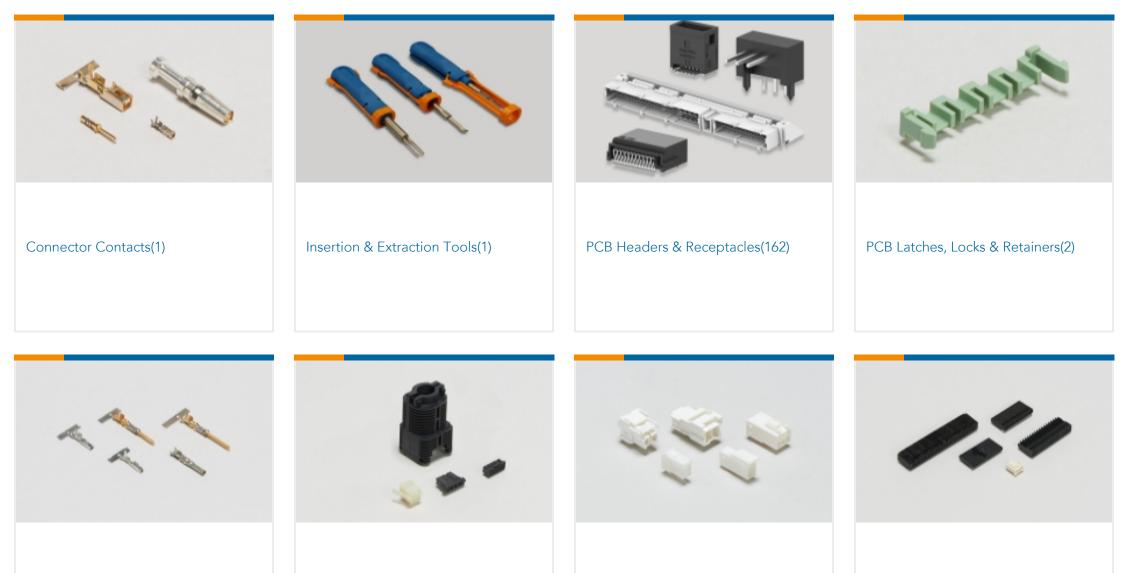

Power Contacts(8)	Rectangular Connector Housings(1)	Rectangular Power Connectors(302)	Wire-to-Board Connector Assemblies
			& Housings(142)



# Customers Also Bought



Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power





# Documents

### Product Drawings 3.96 EP HDR ASSY 2P R/A

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_647676-2\_B.2d\_dxf.zip

English

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_647676-2\_B.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_647676-2\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages 1-1773885-9 Economy Power Connectors

English

**Product Specifications** 

Application Specification

English

**Application Specification** 

Japanese

**Product Environmental Compliance** 

Product Compliance Document

English

Product Compliance Document

English

Agency Approvals UL Report

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



English