
DESCRIPTION: FEMALE - DIP SOLDER - MACHINED - ECONOMY- IP67

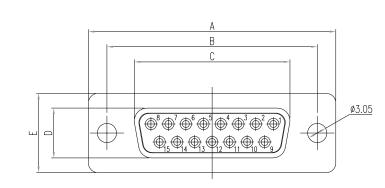

SPECIFICATIONS:

MATERIALS:

INSULATOR: PROCESS TEMP: CONTACTS: SHELL: SEALING MATERIAL: GLASS-FILLED NYLON THERMOPLASTIC, UL94 V-0 260°C GOLD PLATED BRASS NICKEL PLATED STEEL F04 FLEXIBLE ADHESIVE

ELECTRICAL:

RATED CURRENT: WORKING VOLTAGE: INSULATION RESISTANCE: CONTACT RESISTANCE: 5A 250VAC 1000 MOhms MIN. 15 mOhms MAX.

ENVIRONMENT:

15

25

GENDER 2 = FEMALE TERMINATION 1 = DIP SOLDER SHELL PLATING 3 = NICKEL HARDWARE OPTIONS – 00 = NO HARDWARE


PLATING OPTIONS 1 = GOLD FLASH 2 = 30u" GOLD 3 = 50u" GOLD


OPERATING TEMPERATURE:

-55°C TO +125°C



772-EYY-213RYY1

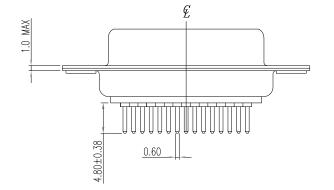



DIMENSIONS(mm)						
SIZE	A ^{+0.39}	B ^{+0.25}	C ^{+0.25}	D ^{+0.25} -0.34	E ^{+0.38}	F ^{+0.25}
9	30.81	24.99	16.33	7.90	12.55	10.80
15	39.19	33.32	24.66	7.90	12.55	10.80
25	53.04	47.04	38.38	7.90	12.55	10.80
37	69.32	63.50	54.84	7.90	12.55	10.80
50	67.00	61.10	52.20	10.90	15.40	13.30

Rohs Compliant



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOrComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: P. JENKINS DATE: 09/04/2008

UNITS = mm DO NOT SCALE FROM DRAWING NORCOMP SCALE: SHEET OF REV NTS 1 3 11 DWG NO. 772-EYY-213RYY1 12

01 = 0.065" CLINCH NUT, BOARD SIDE 05 = 0.237" 4-40 BOARD LOCK, BOARD SIDE

