


符号×数 Part	変更事項 Revision Record	担当者 Changed	日付 Date	確認 Checked	日付 Date	承認 Approved	日付 Date
--------------	-------------------------	----------------	------------	---------------	------------	----------------	------------

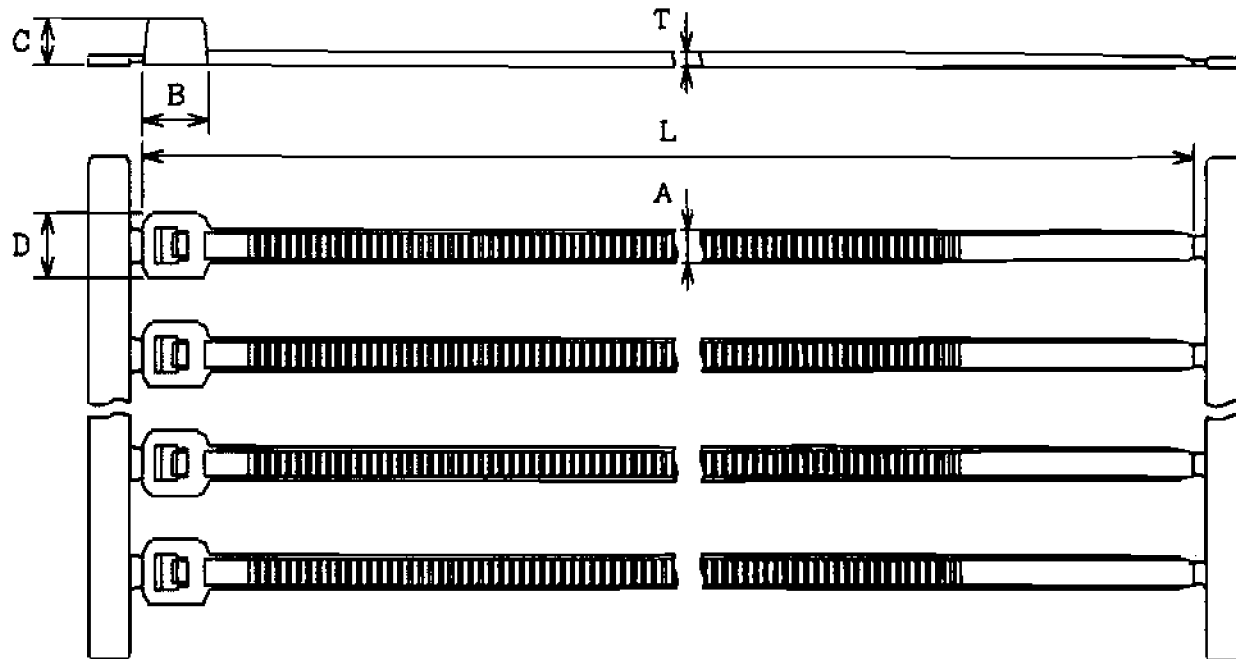

備考 / Note

自動結束機AT2000使用時
最大結束径φ20mm.
When installed with AT2000
autotool, max. bundle diameter
is φ20mm.

ループ引き裂強度(最小値)
/ Min. Loop Tensile
Strength

型番 Product Code	結束径 Cable Range (mm)	材質 Material	L	T	A	B	C	D	連結数 Quantity
T18RA5000-HSW	φ0.7~φ20	667402/P466	100.0±1.0	1.1±0.1	2.5±0.1	4.8±0.5	3.5±0.2	4.8±0.2	5000本連続 1 roll of 5000 ties

80N

2D



製図 / Drawn

19/01/2005

H. Nagai

尺度 / Scale

2/1

本製品の版権はタイトン(株)に属し本稿
の書面での許可無く第三者にもしたり
複製することを禁ずる。
The copyright of this drawing is reserved by
HELLERMANTYTON.

It is agreed as condition that it is not
reproduced, copied or disclosed to a
third party, either wholly or in part, without
the consent of HELLMERMANTYTON.

HellermannTyton

Cable Management Products

Tyton Company of Japan, Ltd.

承認 / Approved

19/01/2005

T. Kashiwa

製品名/型番 / Title

BANDOLIER TIE / T18RA5000 SERIES
FOR AT2000 AUTOTOOL

図面番号 / Drawing No.

05022-13-401

用紙
D. Size

A 4

ページ
Sheet

1/1

寸法単位 / Dimension Units

mm

性能 / Performance
仕様 / Spec.



XCT-TCJ036CST