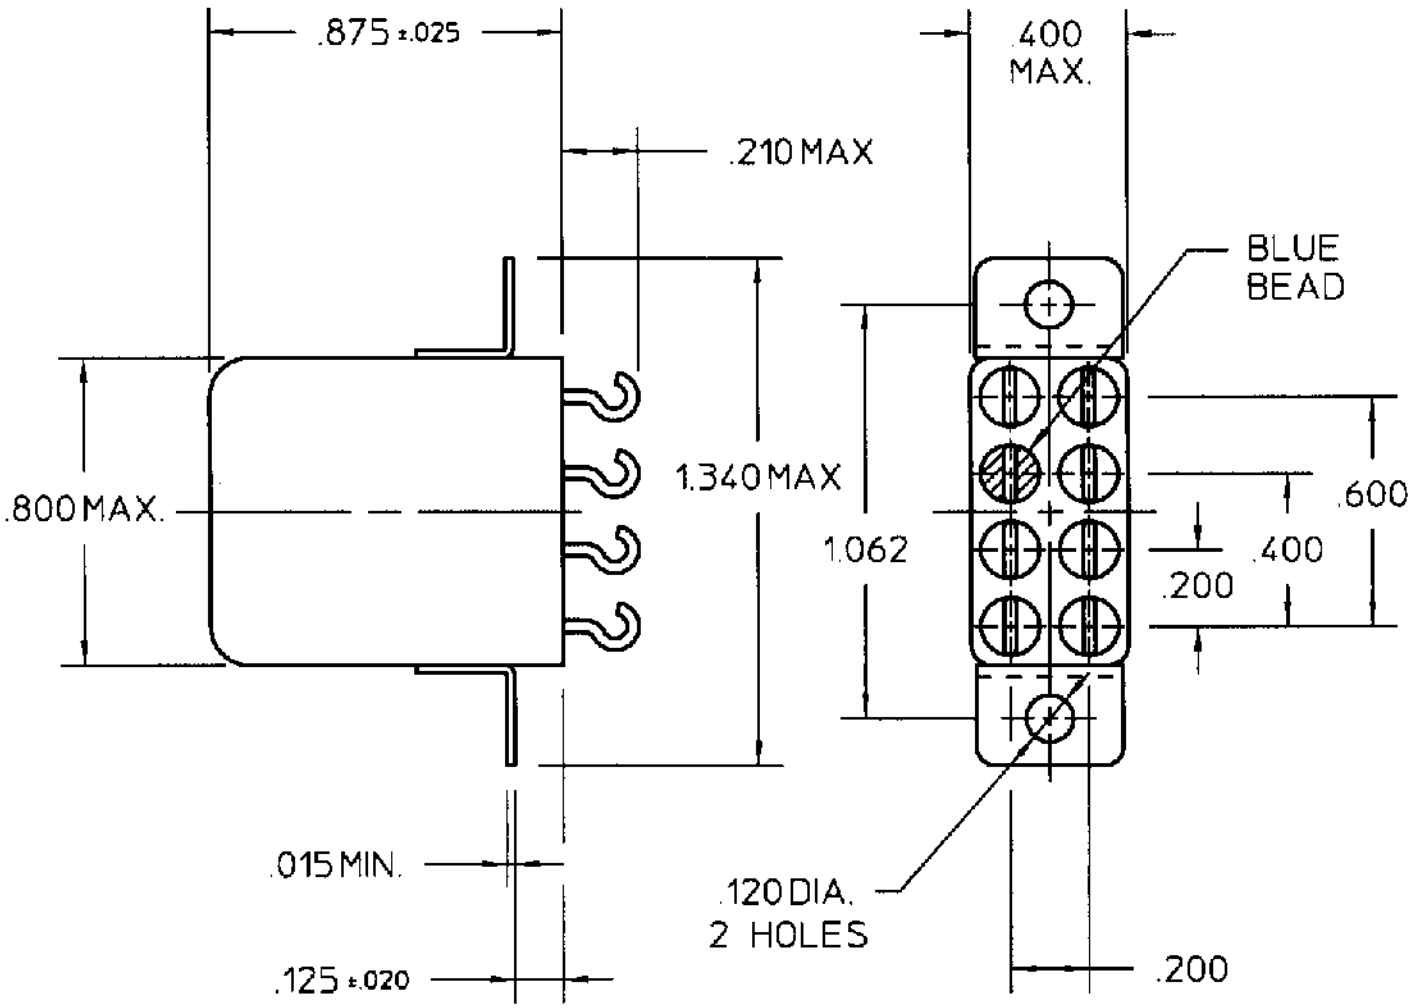

TOLERANCE ± .010

COIL: @ 25° C

RESISTANCE	540-770 OHMS
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX, 2.3 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 6 MS MAX.
* CONTACT BOUNCE 1 MS MAX.
* (MEASURED AT 100mA 28 VDC)

CUSTOMER DATA SHEET

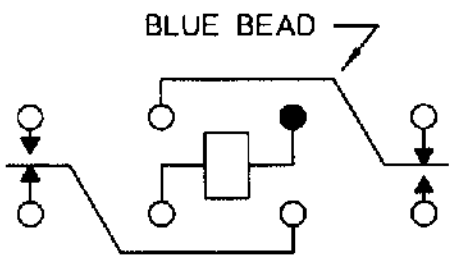

CONTACT RATING: 2 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/15/95 CK. 11/15/95 JMB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO M5757/10-039

TYPE "FW" RELAY

FW1120G01