
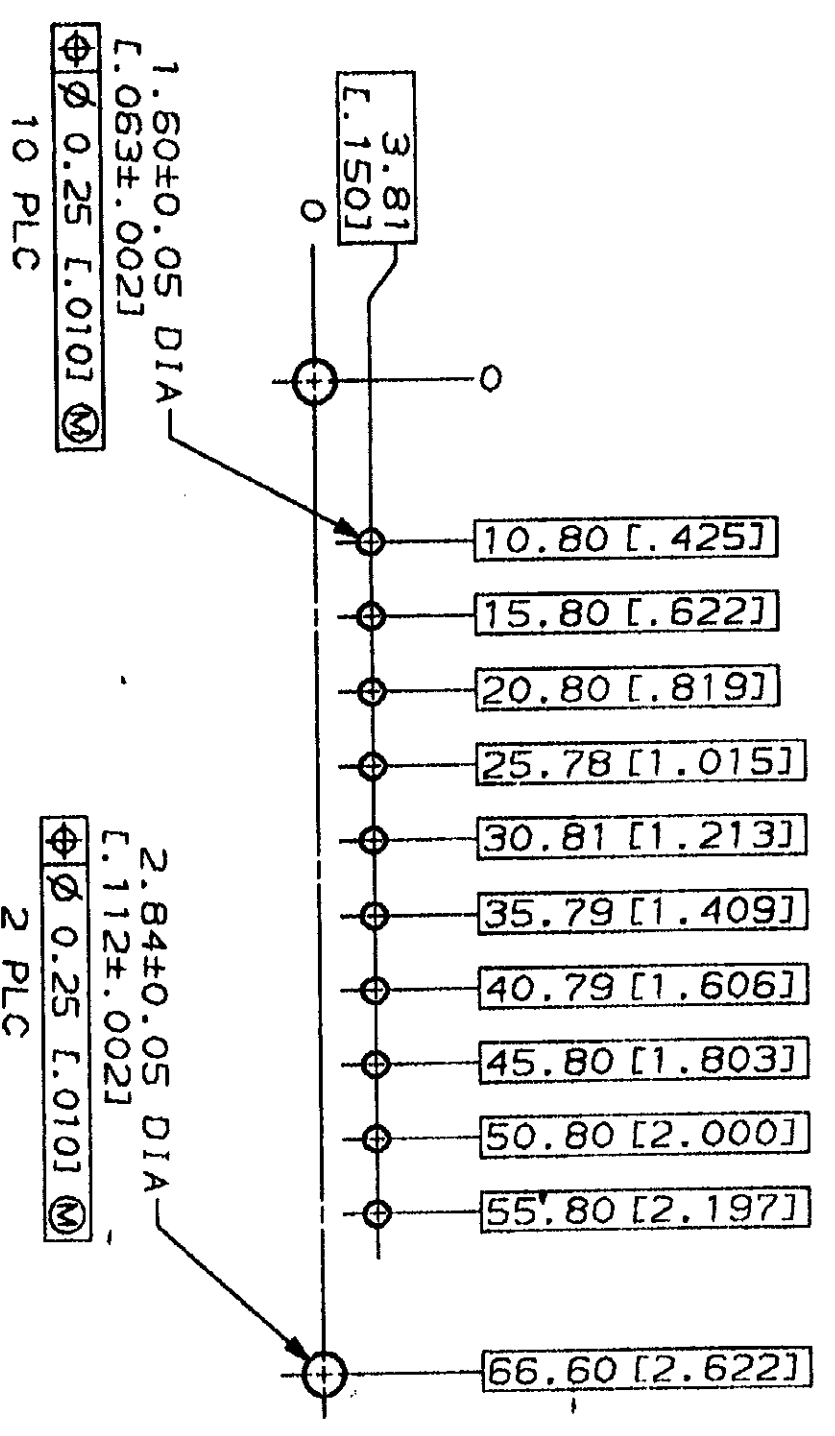
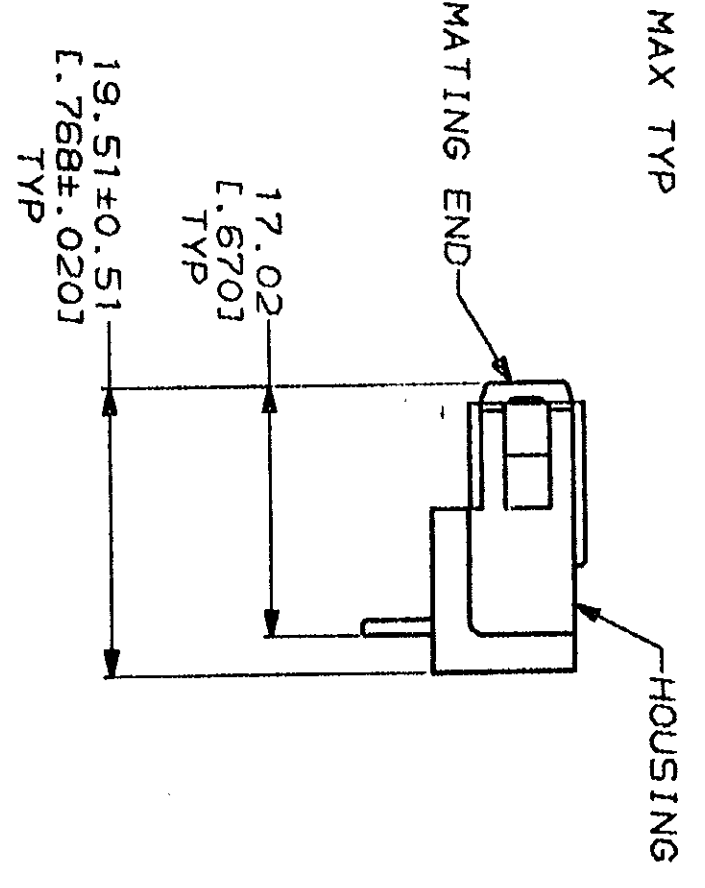
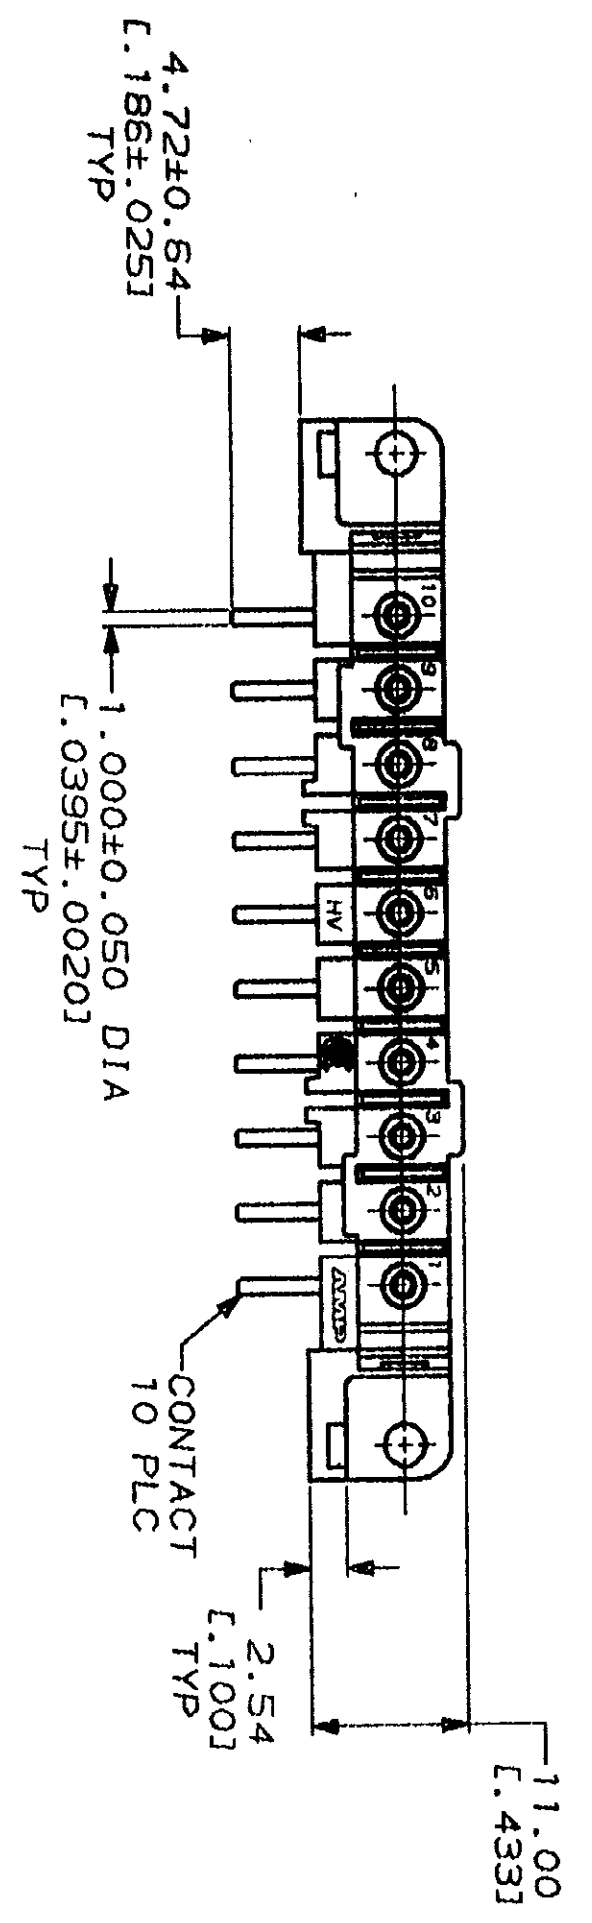


REV	DATE	APPD	DESCRIPTION
1	08/08/92		REV & REDRAWN PER ECN BD6505

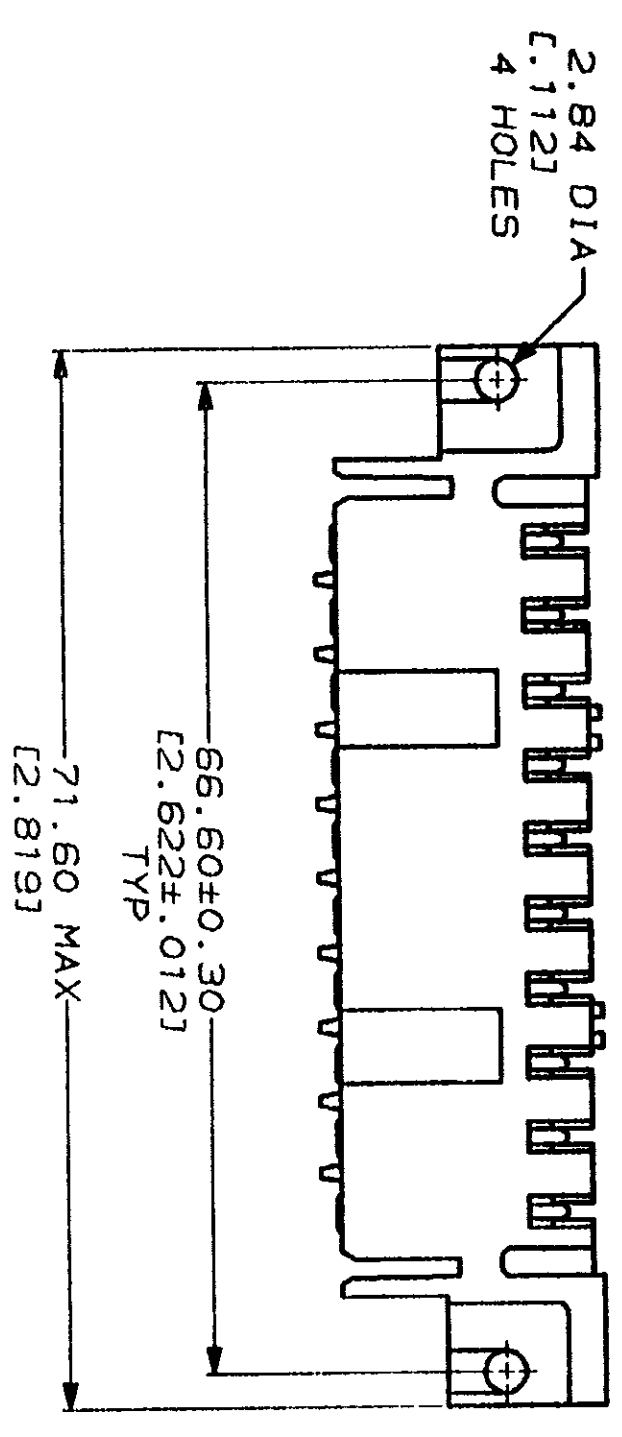

RECOMMENDED PC BOARD LAYOUT

- 1 3.81µm [0.000150] MIN TIN-LEAD OVER 0.76µm [0.000030] MIN NICKEL.
- 2 0.76µm [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [0.200] MIN FROM MATING END, 3.81µm [0.000150] MIN TIN-LEAD FOR A LENGTH OF 5.23 [0.206] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.25 [0.010] 3 PLC DEC ± 0.25 [0.010] ANGLES	DR 08/06/92 L. SIPE	AMP AMP Incorporated Harrisburg, PA 17105-3608
MATERIAL HOUSING: NYLON, RED CONTACTS: PH BRZ	CHK 8-11-92 J. McCLINTON	NAME SOCKET HEADER ASSEMBLY, 10 POSN, IN-LINE, METRIMATE
FINISH CONTACTS: SEE TABLE	APPD 8-12-92 A. TRAVIS	SIZE CAGE CODE 00779 DRAWING NO 207612
	APPD 8-12-92 C. RORDE	SCALE 2:1
	PRODUCT SPEC 108-10033	SHEET 1 OF 1
	APPLICATION SPEC	
	WEIGHT	

2	207612-3
1	207612-1
	PART NO

CUSTOMER DRAWING