



Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are In Millimeters	Revisions	Approved	Date
	Description/Approved/Date	M.H.	
		Checked	Date
		M.H.	
	Drawn	Date	
	T.J.A.	06/17/04	
	NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

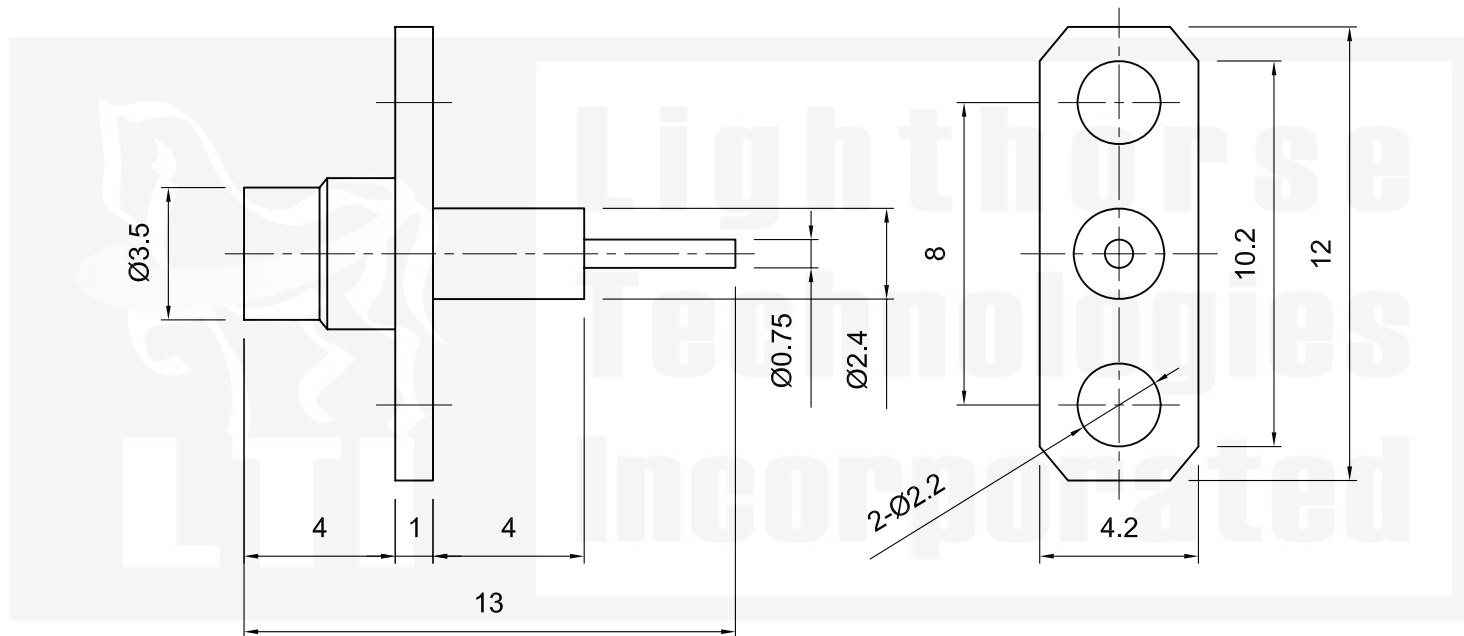

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Gold, Note 8	 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-MCSF92DNFGT	Description	
Center Contact: Female	BeCU, Note 3	Gold, Note 11		MMCX panel mount (Narrow flange) jack with extended dielectric.	
Insulation	Teflon, Note 5	None		Elongated conductor. Gold plated brass body, Teflon dielectric.	
Ferrule	--	--	Scale	Drawing No.	File Name
Gasket	--	--	5:1		MCSF92DNFGT
Hex Nut	--	--			
Lock Washer	--	--			