


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

1	2	3	4	5	6	7	8								
Item No.	Part No.	Description	IPI CHECK	EOR CHECK	APPLICABLE HOUSINGS										
1	SSUH-003T-P0.15	SUH Connector Contact			NO. OF CIRCUITS	HOUSING PART NO. WITH PROTRUSIONS	HOUSING PART NO. WITHOUT PROTRUSIONS								
2	UL1571 (0.58 OD), 28 AWG	White						2	SUHR-02V-S-B	SUHR-02V-S					
<table border="1"> <tr> <th colspan="2">Electrical Specifications</th> </tr> <tr> <td>Current:</td> <td>1.0AAC/DC</td> </tr> <tr> <td>Voltage:</td> <td>30V AC/DC</td> </tr> </table>					Electrical Specifications		Current:	1.0AAC/DC	Voltage:	30V AC/DC			3	SUHR-03V-S-B	SUHR-03V-S
Electrical Specifications															
Current:	1.0AAC/DC														
Voltage:	30V AC/DC														
					4	SUHR-04V-S-B	SUHR-04V-S								
					5	SUHR-05V-S-B	SUHR-05V-S								
					6	SUHR-06V-S-B	SUHR-06V-S								
					10	SUHR-10V-S-B	SUHR-10V-S								
					12	SUHR-12V-S-B	SUHR-12V-S								
					14	SUHR-14V-S-B	SUHR-14V-S								
					16	SUHR-16V-S-B	SUHR-16V-S								
					20	SUHR-20V-S-B	SUHR-20V-S								

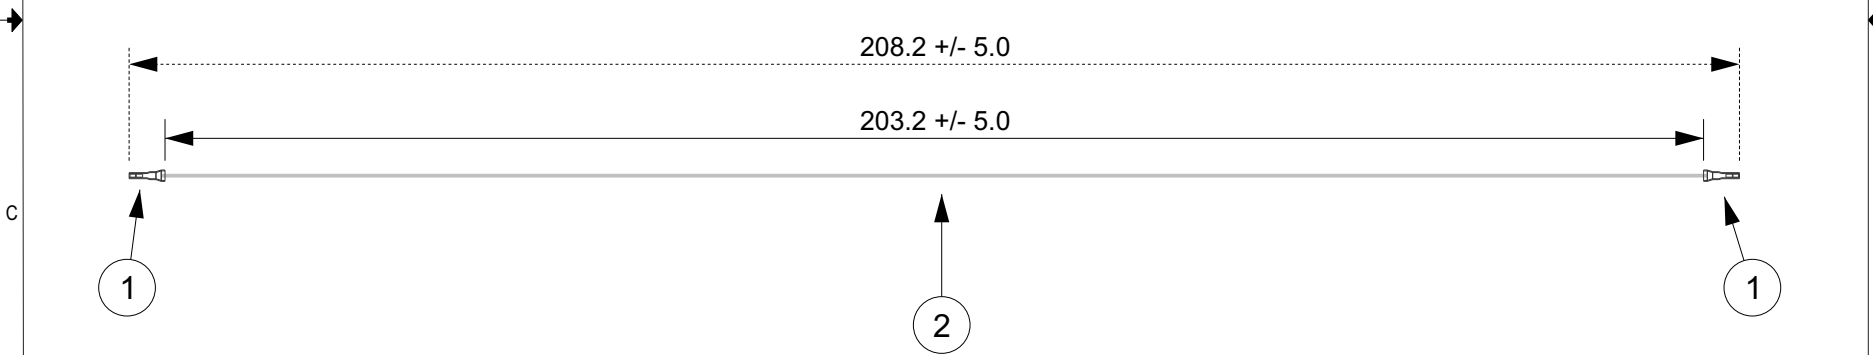

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.				CUSTOMER NAME			
				DESCRIPTION			
				0.8mm Pitch SUH Series Standard Leads - 8" Inside Length DOUBLE END LEADS			
Drawn By: Larissa Mosley		SIZE	CUSTOMER PART NO.	PART NO.	REV		
Checked By: Steven Pilkington		SCALE	ASSUHSSUH28W203				
		1:1	DRAWING NO. GAM-302		DATE		4/18/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	6/29/2018	LM

1 2 3 4 5 6 7 8