

## FCC Part 15, Supart B, Class B(sDoC)

## TEST REPORT

Shenzhen Jingzhongguang Photoelectric Co., Ltd.

portable monitor

Test Model: B1566A

Additional Model No.: B1026, B1166, B1336, B1566B, B1566C, PM15601,  
PM15602, PM15603

Prepared for : Shenzhen Jingzhongguang Photoelectric Co., Ltd.  
Address : 301, Building40, Zhutoubei village, ailian industrial zone, wulian  
community, longcheng street, long gang district, shenzhen,  
china.

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an  
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 24, 2018  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : October 24, 2018 ~ October 25, 2018  
Date of Report : November 16, 2018



**FCC TEST REPORT  
FCC Part 15, Supart B, Class B(sDoC)**

**Report Reference No.** ..... : **LCS181024013AE**

**Date Of Issue** ..... : November 16, 2018

**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

**Address** ..... : Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

**Testing Location/ Procedure** ..... : Full application of Harmonised standards   
 Partial application of Harmonised standards   
 Other standard testing method

**Applicant's Name**..... : **Shenzhen Jingzhongguang Photoelectric Co., Ltd.**

**Address** ..... : 301, Building40, Zhutoubai village, ailian industrial zone, wulian community, longcheng street, long gang district, shenzhen, china.

**Test Specification**

**Standard** ..... : FCC Part 15, Supart B, Class B(sDoC), ANSI C63.4 -2014

**Test Report Form No.** ..... : LCSEMC-1.0

**TRF Originator** ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

**Master TRF** ..... : Dated 2011-03

**SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description.** ..... : **portable monitor**

**Test Model** ..... : B1566A

**Trade Mark** ..... : BOSSTOUCH

**Ratings** ..... : Input: DC 5V, 2.0A  
 Output: DC 5V, 1A

**Result** ..... : **Positive**

**Compiled by:**

*Hana Zeng*

Hana Zeng/ File administrators

**Supervised by:**

*Davey Xu*

Davey Xu/ Technique principal

**Approved by:**



Leo Lee/ Manager

## FCC -- TEST REPORT

**Test Report No. : LCS181024013AE**
November 16, 2018

Date of issue

Test Model ..... : B1566A

EUT..... : portable monitor

**Applicant..... : Shenzhen Jingzhongguang Photoelectric Co., Ltd.**

 Address..... : 301, Building40, Zhutoubei village, ailian industrial zone,  
wulian community, longcheng street, long gang district,  
shenzhen, china.

Telephone..... : /

Fax..... : /

**Manufacturer..... : Shenzhen Jingzhongguang Photoelectric Co., Ltd.**

 Address..... : 301, Building40, Zhutoubei village, ailian industrial zone,  
wulian community, longcheng street, long gang district,  
shenzhen, china.

Telephone..... : /

Fax..... : /

**Factory..... : Shenzhen Jingzhongguang Photoelectric Co., Ltd.**

 Address..... : 301, Building40, Zhutoubei village, ailian industrial zone,  
wulian community, longcheng street, long gang district,  
shenzhen, china.

Telephone..... : /

Fax..... : /

**Test Result** according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
000	November 16, 2018	Initial Issue	Leo Lee

## TABLE OF CONTENTS

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>6</b>
1.1. Description of Standards and Results.....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. Description of Device (EUT) .....	7
2.2. Support equipment List .....	7
2.3. Description of Test Facility .....	7
2.4. Statement of the measurement uncertainty.....	7
2.5. Measurement Uncertainty .....	8
<b>3. POWER LINE CONDUCTED EMISSION MEASUREMENT .....</b>	<b>9</b>
3.1. Test Equipment.....	9
3.2. Block Diagram of Test Setup .....	9
3.3. Test Standard .....	9
3.4. EUT Configuration on Test .....	9
3.5. Operating Condition of EUT .....	10
3.6. Test Procedure .....	10
3.7. Test Results .....	10
<b>4. RADIATED EMISSION MEASUREMENT .....</b>	<b>12</b>
4.1. Test Equipment.....	12
4.2. Block Diagram of Test Setup .....	12
4.3. Radiated Emission Limit (Class B) .....	12
4.4. EUT Configuration on Measurement .....	13
4.5. Operating Condition of EUT .....	13
4.6. Test Procedure .....	13
4.7. Radiated Emission Noise Measurement Result.....	13
<b>5. PHOTOGRAPH.....</b>	<b>15</b>
5.1. Photo of Power Line Conducted Measurement.....	15
5.2. Photo of Radiated Measurement .....	15
<b>6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....</b>	<b>16</b>

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC Part 15, Supart B, Class B(sDoC), ANSI C63.4 -2014	Class B	PASS
Radiated disturbance	FCC Part 15, Supart B, Class B(sDoC), ANSI C63.4 -2014	Class B	PASS
Conducted disturbance at Antenna terminals	FCC Part 15, Supart B, Class B(sDoC), ANSI C63.4 -2014	-----	N/A

N/A is an abbreviation for Not Applicable.

Test mode:		
Mode 1	USB Model	Pre-scan
Mode 2	AV Model	Pre-scan
Mode 3	Charging Model	Record

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : portable monitor

Trade Mark : BOSSTOUCH

Test Model : B1566A

Power Supply : Input: DC 5V, 2.0A  
Output: DC 5V, 1A

EUT Clock Frequency :  $\leq 108\text{MHz}$

### 2.2. Support equipment List

Name	Manufacturers	M/N	S/N
Adapter	Lenovo	QDS751-240200-2	---

### 2.3. Description of Test Facility

Site Description  
EMC Lab. : FCC Registration Number. is 254912.  
Industry Canada Registration Number. is 9642A-1.  
ESMD Registration Number. is ARCB0108.  
UL Registration Number. is 100571-492.  
TUV SUD Registration Number. is SCN1081.  
TUV RH Registration Number. is UA 50296516-001.  
NVLAP Registration Code is 600167-0.

### 2.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 2.5. Measurement Uncertainty

Test	Parameters	Expanded uncertainty ( $U_{lab}$ )	Expanded uncertainty ( $U_{cisp}$ )
Conducted Emission	Level accuracy (9kHz to 150kHz)	$\pm 2.63$ dB	$\pm 3.8$ dB
	(150kHz to 30MHz)	$\pm 2.35$ dB	$\pm 3.4$ dB
Power disturbance	Level accuracy (30MHz to 300MHz)	$\pm 2.90$ dB	$\pm 4.5$ dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	$\pm 3.60$ dB	$\pm 3.3$ dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	$\pm 3.68$ dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	$\pm 3.48$ dB	$\pm 5.3$ dB
Radiated Emission	Level accuracy (above 1000MHz)	$\pm 3.90$ dB	$\pm 5.2$ dB
Mains Harmonic	Voltage	$\pm 0.510\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.510\%$	N/A
EMF		$\pm 21.59\%$	N/A

(1)Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2)The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.




### 3. POWER LINE CONDUCTED EMISSION MEASUREMENT

#### 3.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2018-06-16
2	10dB Attenuator	SCHWARZBECK	MTS-IMP136	261115-001-0032	2018-06-16
3	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2018-06-16
4	EMI Test Software	AUDIX	E3	N/A	N/A
5	ISN	SCHWARZBECK	NTFM 8158	NTFM 8158 0120	2017-11-17

#### 3.2. Block Diagram of Test Setup

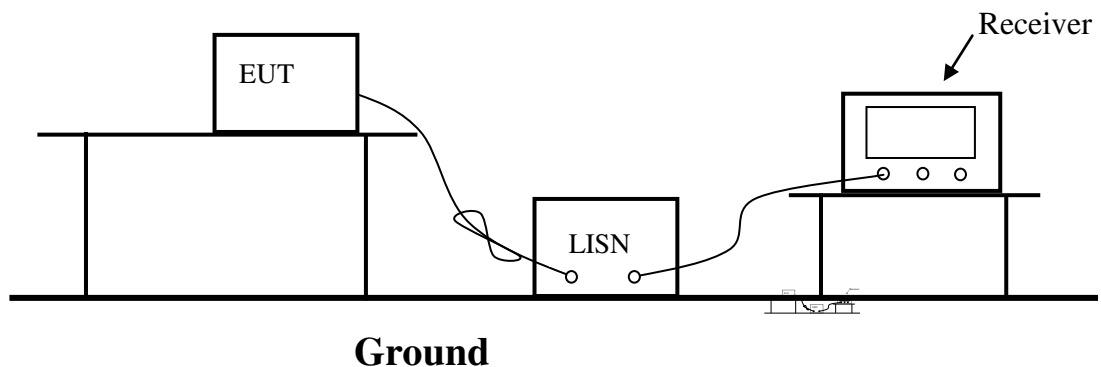

#### 3.3. Test Standard

##### Power Line Conducted Emission Limits (Class B)

Frequency (MHz)			Limit (dB $\mu$ V)	
			Quasi-peak Level	Average Level
0.15	~	0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50	~	5.00	56.0	46.0
5.00	~	30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.

NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

#### 3.4. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown on Section 3.2

3.5.2. Turn on the power of all equipments.

3.5.3. Let the EUT work in measuring mode (Mode 3) and measure it.

### 3.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.


The frequency range from 150kHz to 30MHz is investigated

### 3.7. Test Results

**PASS.**

The test result please refer to the next page.

<b>Test Model</b>	B1566A	<b>Test Mode</b>	Mode 3
<b>Environmental Conditions</b>	23.5°C, 53.1% RH	<b>Test Engineer</b>	Daiwei Dai
<b>Pol</b>	Line	<b>Test Voltage</b>	AC 120V/50Hz

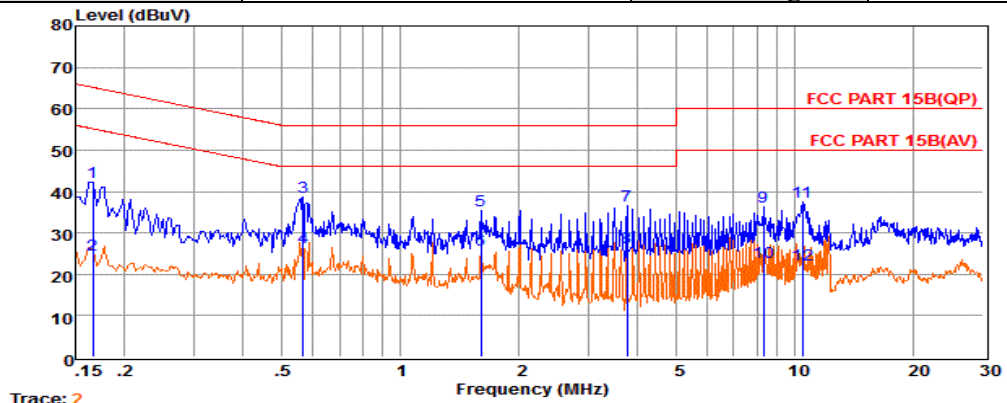


Trace: 2

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	22.66	9.59	0.02	10.00	42.27	65.16	-22.89	QP
2	0.17	5.19	9.59	0.02	10.00	24.80	55.16	-30.36	Average
3	0.57	18.94	9.63	0.04	10.00	38.61	56.00	-17.39	QP
4	0.57	6.67	9.63	0.04	10.00	26.34	46.00	-19.66	Average
5	1.60	15.56	9.64	0.05	10.00	35.25	56.00	-20.75	QP
6	1.60	6.05	9.64	0.05	10.00	25.74	46.00	-20.26	Average
7	3.76	16.96	9.65	0.06	10.00	36.67	56.00	-19.33	QP
8	3.76	6.64	9.65	0.06	10.00	26.35	46.00	-19.65	Average
9	8.32	16.58	9.68	0.07	10.00	36.33	60.00	-23.67	QP
10	8.32	3.15	9.68	0.07	10.00	22.90	50.00	-27.10	Average
11	10.45	17.61	9.69	0.08	10.00	37.38	60.00	-22.62	QP
12	10.45	2.63	9.69	0.08	10.00	22.40	50.00	-27.60	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

<b>Test Model</b>	B1566A	<b>Test Mode</b>	Mode 3
<b>Environmental Conditions</b>	23.5°C, 53.1% RH	<b>Test Engineer</b>	Daiwei Dai
<b>Pol</b>	Neutral	<b>Test Voltage</b>	AC 120V/50Hz

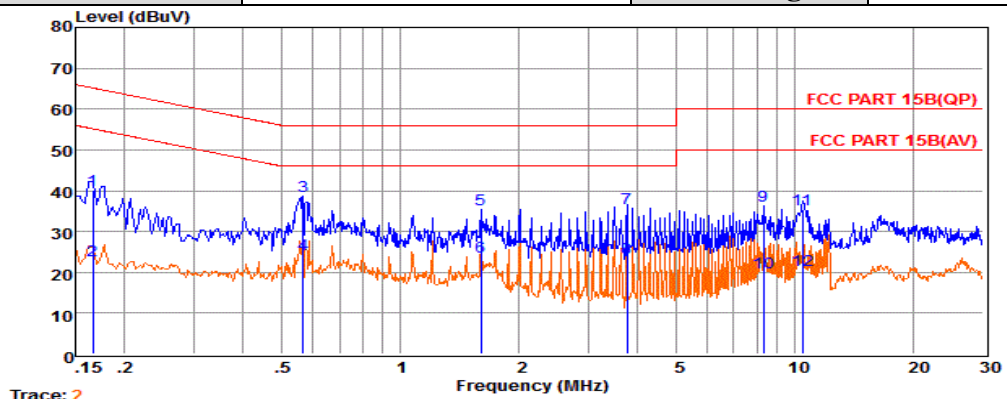

Trace: 2

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.17	20.59	9.66	0.02	10.00	40.27	65.16	-24.89	QP
2	0.17	3.12	9.66	0.02	10.00	22.80	55.16	-32.36	Average
3	0.57	18.95	9.62	0.04	10.00	38.61	56.00	-17.39	QP
4	0.57	4.68	9.62	0.04	10.00	24.34	46.00	-21.66	Average
5	1.60	15.57	9.63	0.05	10.00	35.25	56.00	-20.75	QP
6	1.60	4.06	9.63	0.05	10.00	23.74	46.00	-22.26	Average
7	3.76	15.96	9.65	0.06	10.00	35.67	56.00	-20.33	QP
8	3.76	3.64	9.65	0.06	10.00	23.35	46.00	-22.65	Average
9	8.32	16.56	9.70	0.07	10.00	36.33	60.00	-23.67	QP
10	8.32	0.13	9.70	0.07	10.00	19.90	50.00	-30.10	Average
11	10.45	15.58	9.72	0.08	10.00	35.38	60.00	-24.62	QP
12	10.45	0.60	9.72	0.08	10.00	20.40	50.00	-29.60	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-Scan all mode, Thus record worse case mode result in this report.


## 4. RADIATED EMISSION MEASUREMENT

### 4.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018-06-16
2	EMI Test Receiver	ROHDE & SCHWARZ	ESR 7	101181	2018-06-16
3	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018-05-01
4	EMI Test Software	AUDIX	E3	N/A	2018-06-16
5	Positioning Controller	MF	MF-7082	/	2018-06-16

### 4.2. Block Diagram of Test Setup

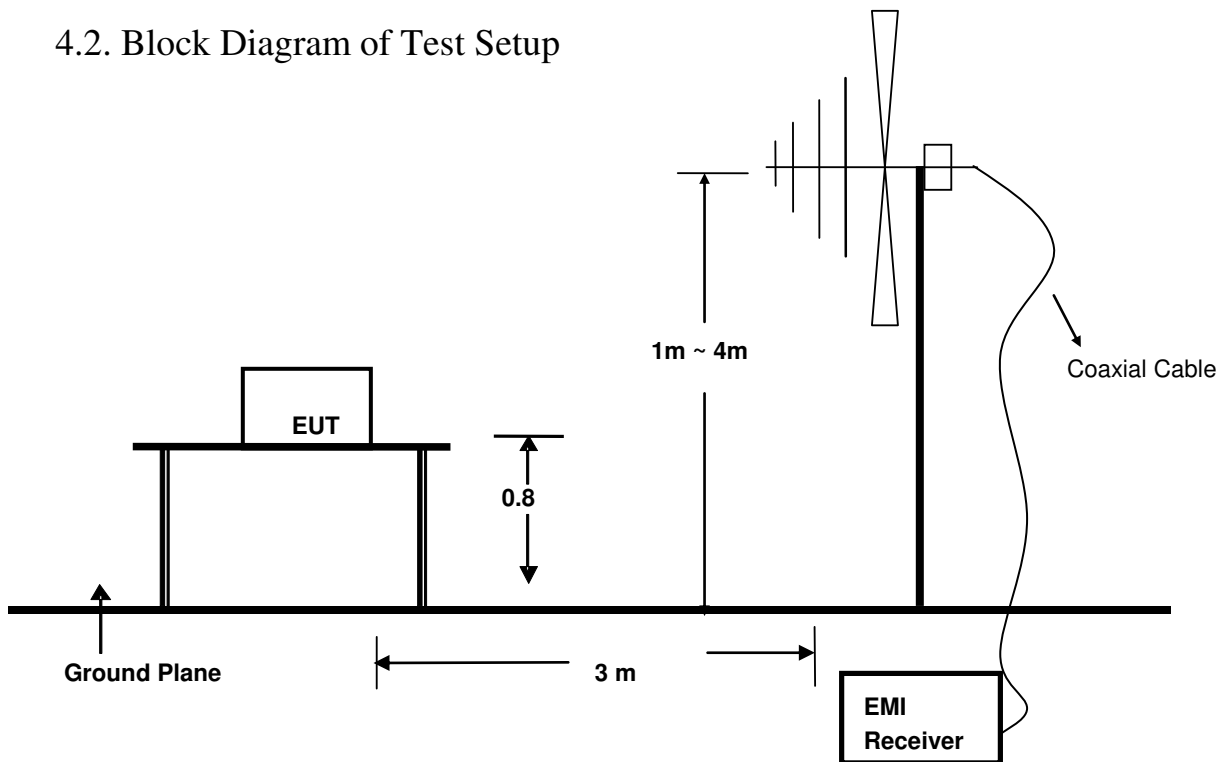

### 4.3. Radiated Emission Limit (Class B)

Limits for radiated disturbance Blow 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark : (1) Emission level  $(\text{dB})\mu\text{V} = 20 \log$  Emission level  $\mu\text{V/m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown in Section 4.2.

4.5.2. Let the EUT work in test mode (Mode 3) and measure it.

#### 4.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 1000kHz.


The frequency range from 30MHz to 1000MHz is checked.

#### 4.7. Radiated Emission Noise Measurement Result

**PASS.**

The scanning waveforms please refer to the next page.


<b>Test Model</b>	B1566A	<b>Test Mode</b>	Mode 3
<b>Environmental Conditions</b>	24.1°C, 52.6% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Vertical	<b>Distance</b>	3m
<b>Test Engineer</b>	Daiwei Dai	<b>Test Voltage</b>	AC 120V/50Hz

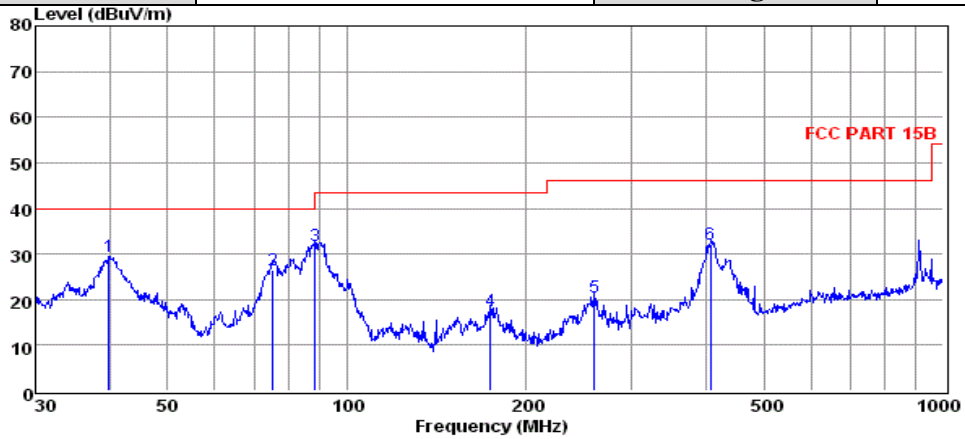

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	39.85	15.42	0.38	13.54	29.34	40.00	-10.66	QP
2	75.18	18.16	0.54	7.83	26.53	40.00	-13.47	QP
3	88.34	19.70	0.68	11.37	31.75	43.50	-11.75	QP
4	173.81	7.54	0.91	9.24	17.69	43.50	-25.81	QP
5	260.14	7.33	1.01	12.05	20.39	46.00	-25.61	QP
6	407.51	15.77	1.17	15.21	32.15	46.00	-13.85	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

<b>Test Model</b>	B1566A	<b>Test Mode</b>	Mode 3
<b>Environmental Conditions</b>	24.1°C, 52.6% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Horizontal	<b>Distance</b>	3m
<b>Test Engineer</b>	Daiwei Dai	<b>Test Voltage</b>	AC 120V/50Hz

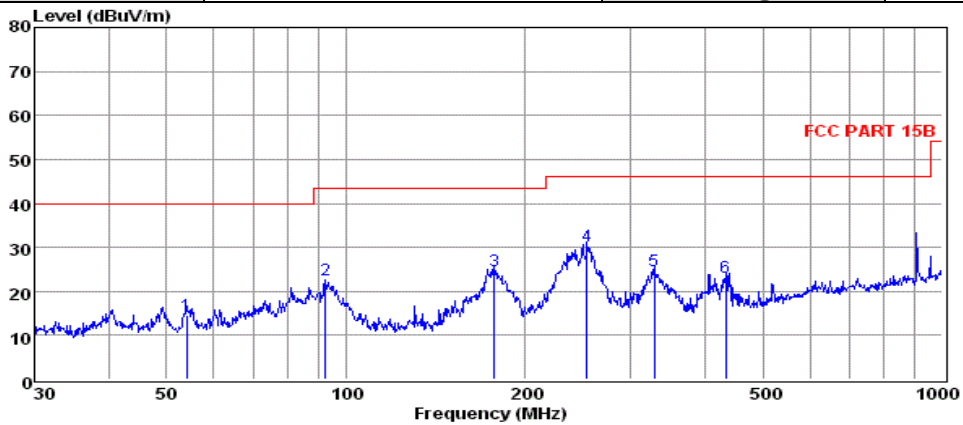

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	54.07	1.01	0.46	13.06	14.53	40.00	-25.47	QP
2	92.46	9.72	0.56	12.36	22.64	43.50	-20.86	QP
3	177.51	14.37	0.89	9.50	24.76	43.50	-18.74	QP
4	253.84	17.26	0.90	12.06	30.22	46.00	-15.78	QP
5	329.04	9.82	1.17	13.69	24.68	46.00	-21.32	QP
6	434.07	6.45	1.18	15.53	23.16	46.00	-22.84	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

## 5. PHOTOGRAPH

### 5.1. Photo of Power Line Conducted Measurement



### 5.2. Photo of Radiated Measurement





## 6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

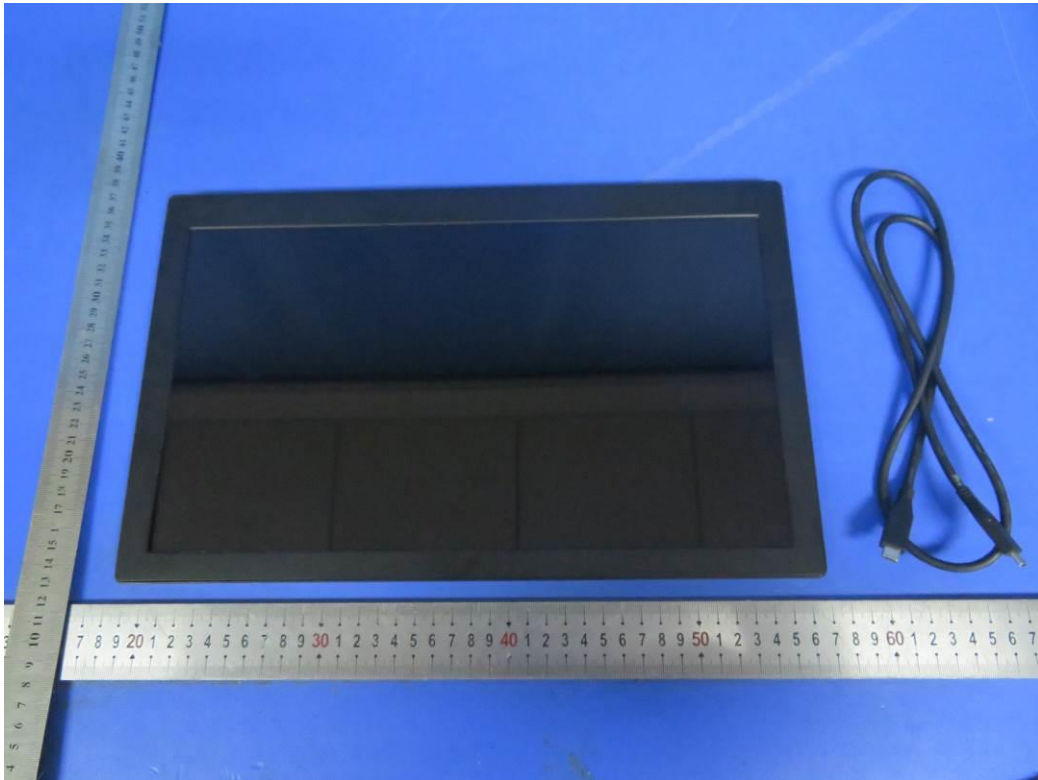


Fig.1

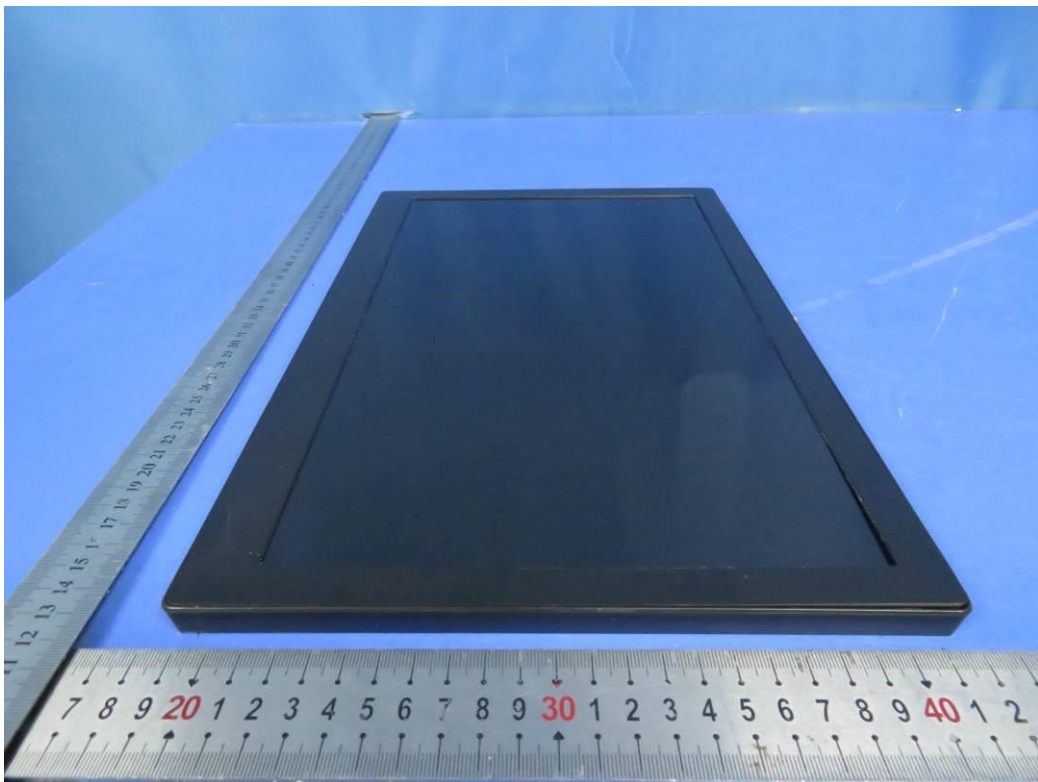


Fig.2





Fig.3



Fig.4

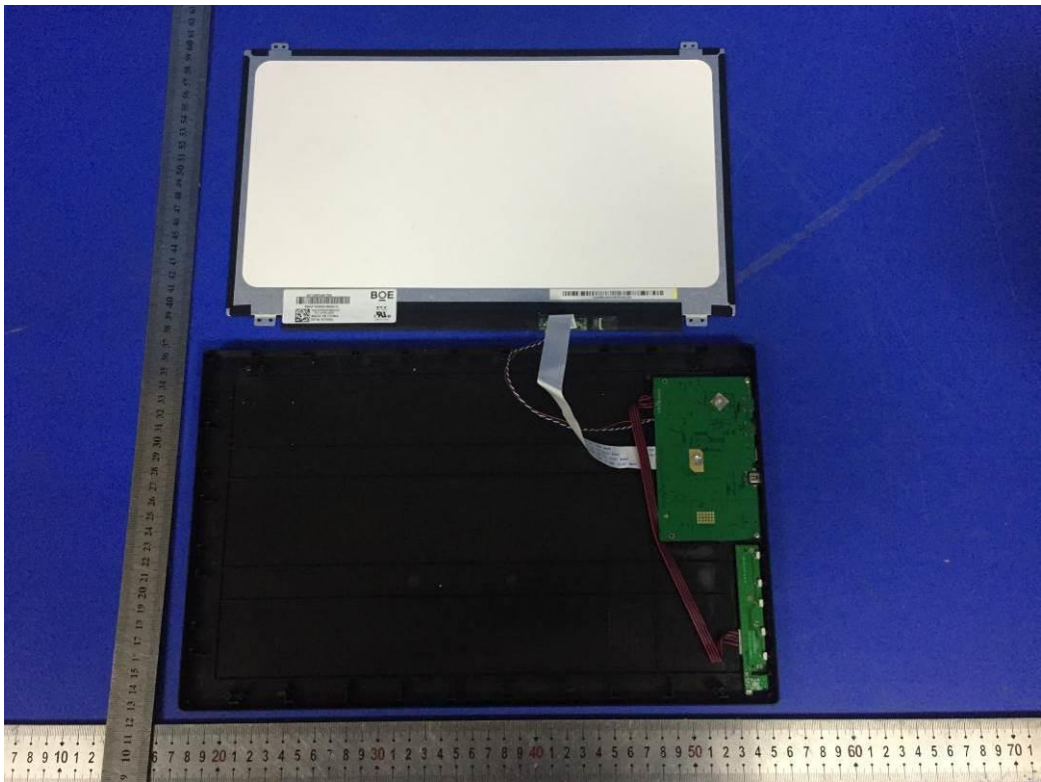


Fig.5

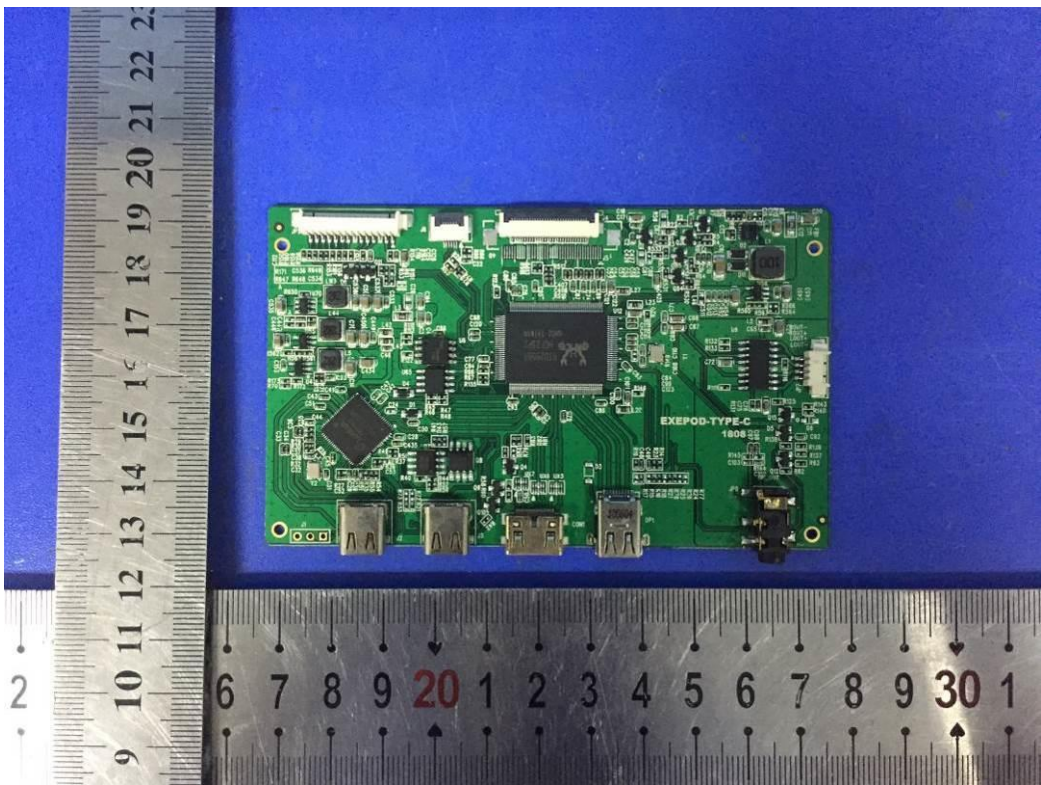


Fig.6



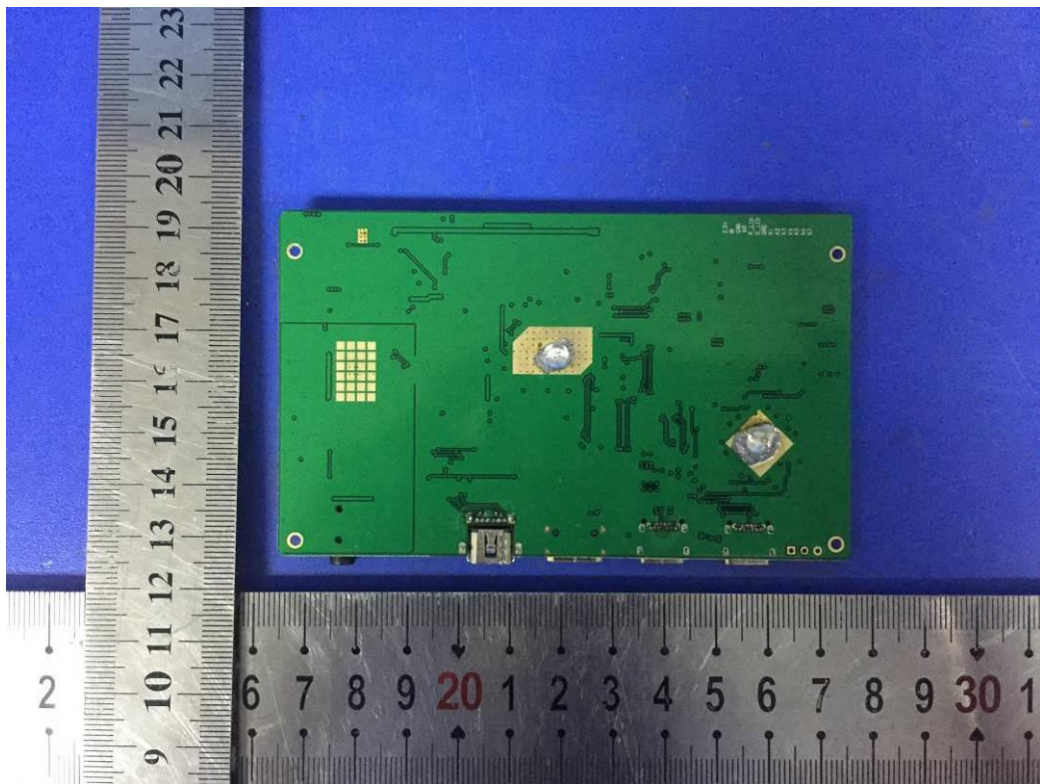


Fig.7

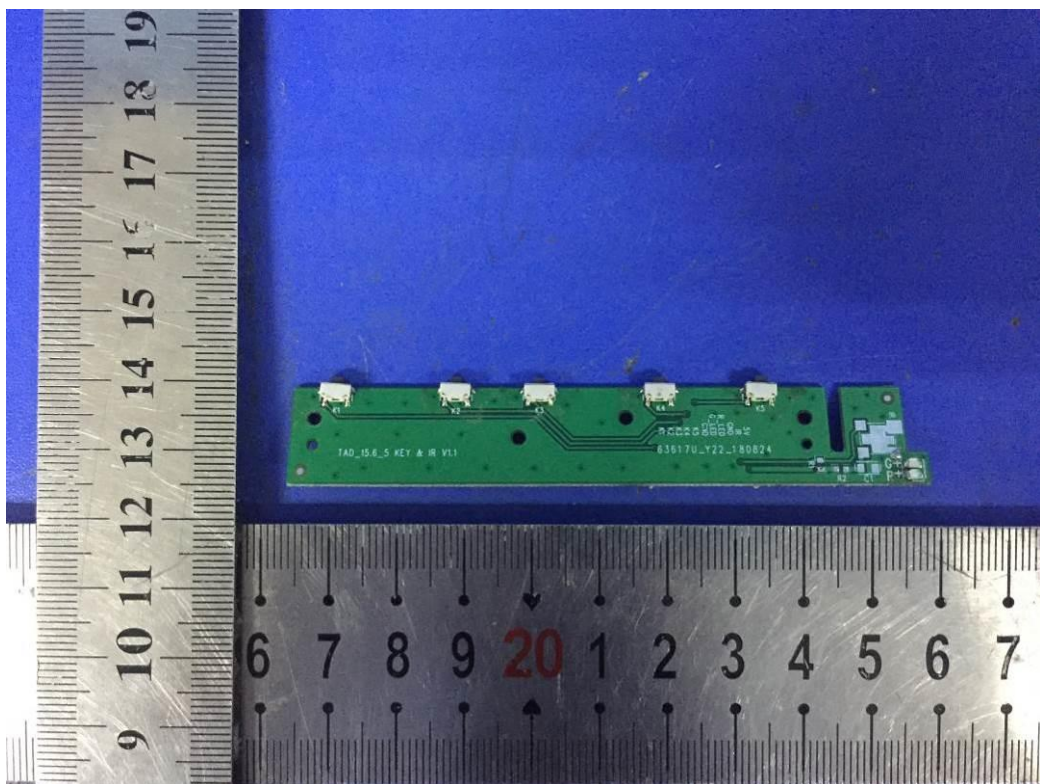


Fig.8

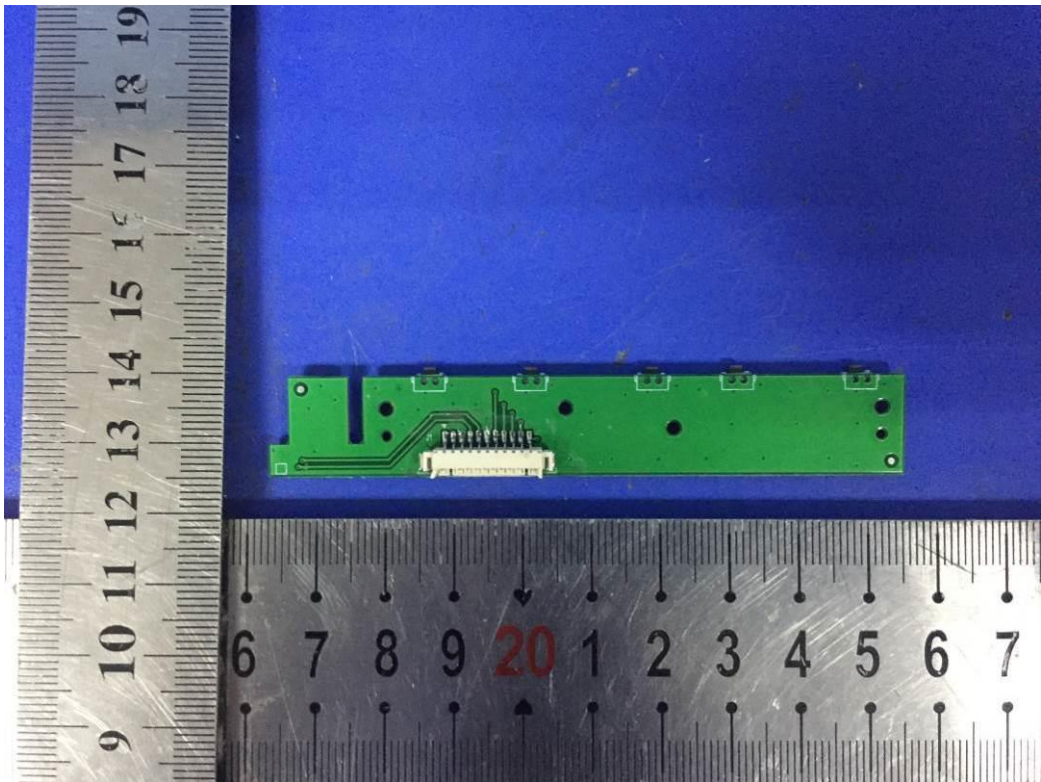


Fig.9

-----THE END OF TEST REPORT-----