
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT	STUD SIZE	DIMENSIONS in [mm]					
PART #		A ± (0,8]	$W\pm\frac{.01}{[0,3]}$	C ± .02 [0,51]	$\mathbf{M}\pm\frac{.03}{[0,8]}$	H± .01 [0,3]	
PV22-2R	#2	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.10 [2,54]	
PV22-4R	#4	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.12 [3,05]	
PV22-6R	#6	.68 [17,27]	.21 [5,33]	.18 [4,57]	.58 [14,73]	.15 [3,81]	
PV22-8R	#8	.78 [19,81]	.26 [6,60]	.26 [6,60]	.65 [16,51]	.17 [4,32]	
PV22-10R	#10	.78 [19,81]	.32 [8,13]	.24 [6,10]	.62 [15,75]	.20 [5,08]	

**INSTALLATION TOOLS** CT-520 CT-1525 (A POCKET) CT-2500 (CT-2525CH: A PKT)

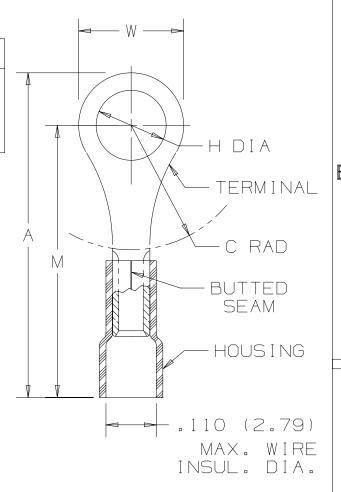

## NOTES:

- 1. RECOMMENDED FOR:
- A. #26-22 AWG SOLID OR STRANDED COPPER WIRE
- B. 221°F [105°C] MAX TEMP. RATING
- C. 600V MAX VOLTAGE RATING
- 2. MATERIAL:
  - A. STAMPING .02" [0,5] THK COPPER, TIN PLATED
  - B. HOUSING VINYL, YELLOW
- 3. SEE www.panduit.com FOR PACKAGE QUANTITIES
- 4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- 5. WIRE STRIP LENGTH:  $3/16^{\circ}$   $+1/32 \\ -0$  [4,8mm $^{+0,8}_{-0}$ ]

Panduit part numbers shown ion this drawing meet the material requirements of RoHS (European Directive 2002/95/EC on the Restriction of Hazarduos Substances) as proposed by the Technical Adaption Committee.

09	1/14	JHNU	JHNU	RGB	ADDED WIRE TO MAX. INSUL. DIA.	N41230BA-A41230
08	11/13	JHNU	JHNU	NU RGB BUTTED SEAM WAS BRAZED SEAM		N41230BA-A41230
REV	DATE	ВУ	СНК	APR	DESCRIPTION	ECN

