

Precision Fixed Attenuator

50Ω 5W 10dB DC to 18000 MHz

BW-N10W5+



Generic photo used for illustration purposes only

CASE STYLE: DC736

| | |
|-----------------|-----------|
| Connectors | Model |
| N-Female N-Male | BW-N10W5+ |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

| | |
|-----------------------|------------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 100°C** |

**With mated connectors. Unmated, 85°C max.
Permanent damage may occur if any of these limits are exceeded.


Features

- DC to 18000 MHz
- precise attenuation
- excellent VSWR, 1.20 typ
- stainless steel N male and female connectors

Applications

- matching
- instrumentation
- test set-ups

Outline Drawing

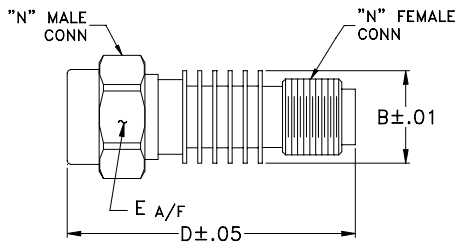

Outline Dimensions (inch/mm)

| | | | |
|-------|-------|-------|-------|
| B | D | E | wt |
| .61 | 1.90 | .812 | grams |
| 15.49 | 48.26 | 20.62 | 49.7 |

Electrical Specifications




| FREQ. RANGE (MHz) | ATTENUATION ¹ (dB) | | VSWR ² (:1) | | | MAX. INPUT POWER ³ (W) |
|-------------------------|-------------------------------|----------|------------------------|--------------|-----------------|-----------------------------------|
| | Nom. | ACCURACY | DC-4 GHz Max. | 4-8 GHz Max. | 8-12.4 GHz Max. | |
| $f_L - f_U$ DC-18000 | 10 | ±0.60 | 1.20 | 1.25 | 1.30 | 5 |

1. At 25°C, accuracy includes frequency and power variations. Temperature coefficient for attenuation: .0004dB/dB/°C typ.
2. VSWR from 12.4 to 18 GHz, 1.6:1 typ.
3. Average power at 25°C ambient, derate linearly to 2W at 100°C. Peak Power 125W max. 5µsec. pulse width, 100 Hz PRF.

Typical Performance Data

| Frequency (MHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 100 | 9.83 | 1.01 |
| 2000 | 9.88 | 1.04 |
| 4000 | 9.87 | 1.07 |
| 6000 | 9.95 | 1.12 |
| 8000 | 9.92 | 1.05 |
| 10000 | 9.92 | 1.24 |
| 12000 | 9.94 | 1.13 |
| 14000 | 9.99 | 1.13 |
| 16000 | 9.95 | 1.28 |
| 18000 | 10.14 | 1.20 |

Electrical Schematic

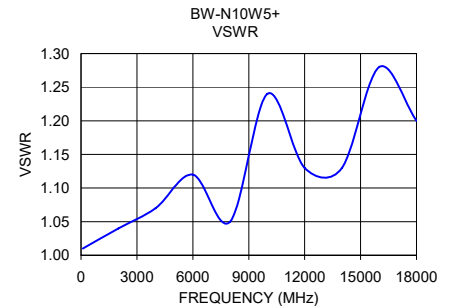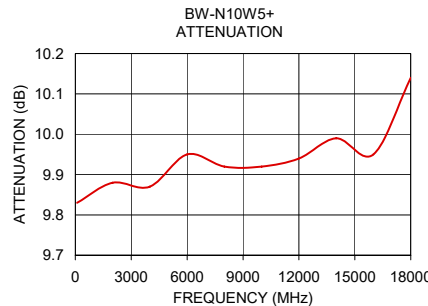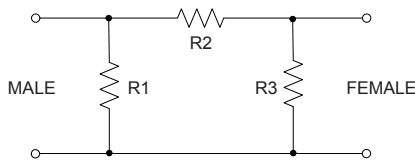

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp

