



MA 001C (DB9M/25M ADAPTOR)
 PIN OUT: 09Male 25Male

1	-----	8
2	-----	3
3	-----	2
4	-----	20
5	-----	7
6	-----	6
7	-----	4
8	-----	5
9	-----	22
G	-----	G

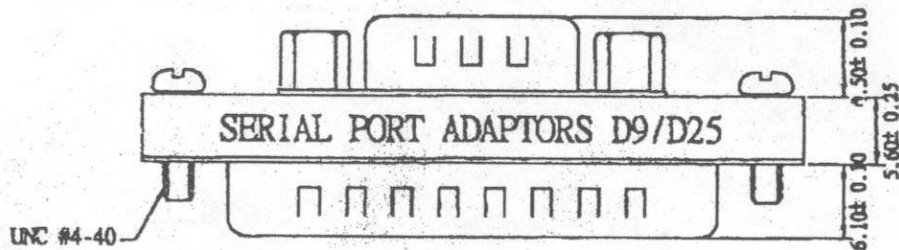

UNC #4-40

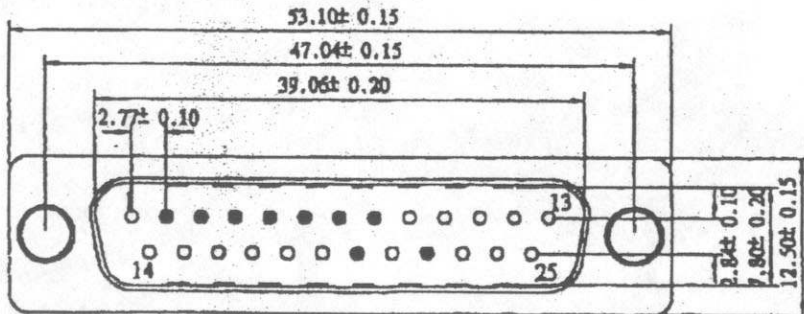

Label: orange color with white character
 One side: SERIAL PORT ADAPTORS D9/D25
 The other side: MINI ADAPTER
 SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 VO
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin plated shell
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 500V AC for one minute
 INSULATOR RESISTANCE: 500MΩ min at 500V DC
 TEMPERATURE: -25°C — +105°C


AB467

Edition A01

SCALE 2:1

UNIT mm

Page 1/1



ASSMANN

DATE 8/Dec-2001

DRAWN

Fu Hao

CHECKED

APPRD

2001/12/8

DATE

REVISION

DESCRIPTION

1

Customer