

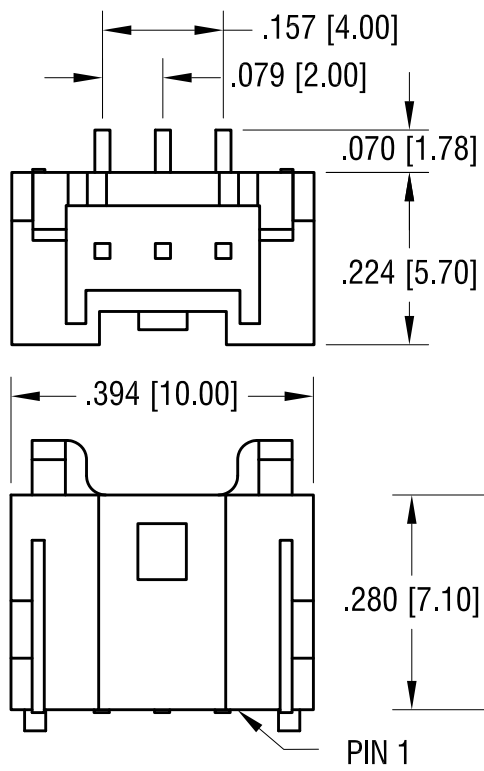


THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

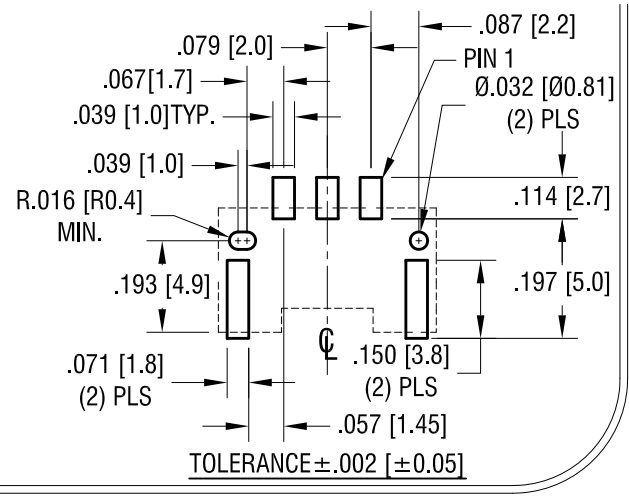


**ACTUAL SIZE**



**CONNECTOR SPECIFICATION**

1. HOUSING: MAT'L- PA66, UL94V-0
2. POST: MAT'L- COPPER ALLOY  
TIN PLATED
3. WAFER: MAT'L- GLASS FILLED PBT, UL94V-0  
COLOR- NATURAL

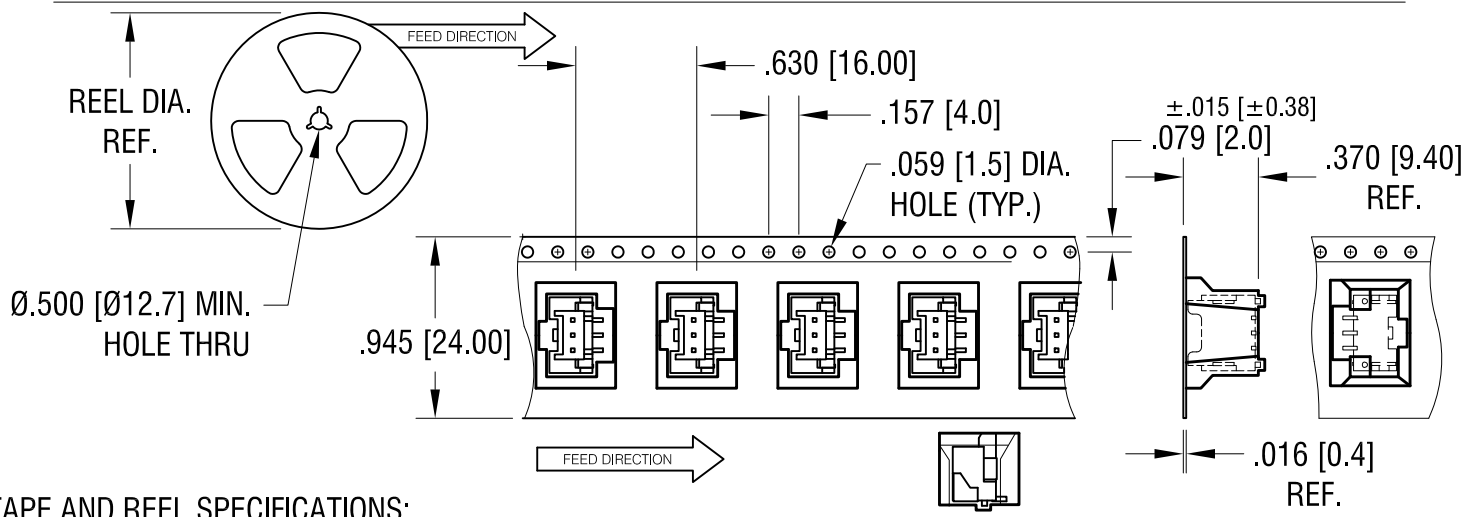

**TAPE AND REEL SPECIFICATIONS:**

4. TAPE: MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER  
ANSI/EIA-481 STANDARD
5. REEL: 15.0 [380.8] DIA. 500 PIECES PER REEL
6. KAPTON TAPE TO BE APPLIED TO TOP  
SURFACE OF EACH CONNECTOR FOR  
VACUUM PICK AND PLACE

<b>KEYSTONE ELECTRONICS CORP.</b>			
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
SM TOP ENTRY CONNECTOR (3 CIRCUITS)			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	10.07.21
		APP'D	SCALE
		RH	4X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	± .005 [± 0.13]	C	<b>964</b>
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			

DATE	DESCRIPTION	REV.
------	-------------	------