

# Type ANK80 Automotive Blade Fuse 3 Terminal (Micro3)



www.optifuse.com (619) 593-5050

## Specifications:


- Voltage: 80V DC
- Amperage: 5A, 7.5A, 10A, 15A, 20A
- Body Material: Nylon with 25% Fiberglass
- Cover Material: Nylon with 25% Fiberglass, Red
- Metal Material: Copper Alloy, gal Sn
- Element: Zinc Alloy, Sn plated
- Interrupting Rating: 1000A @ 80 VDC

Part Number	Amperage	Body Color
ANK80-5A	5A	Tan
ANK80-7.5A	7.5A	Brown
ANK80-10A	10A	Red
ANK80-15A	15A	Blue
ANK80-20A	20A	Yellow

## Time Characteristics:

% of Rated Current	Min Hold Time	Max Hold Time
110%	100h	
135%	750ms	1800s
200%	150ms	30s
350%	40ms	500ms
600%	10ms	100ms

## Mechanical Dimensions: Inches [mm]

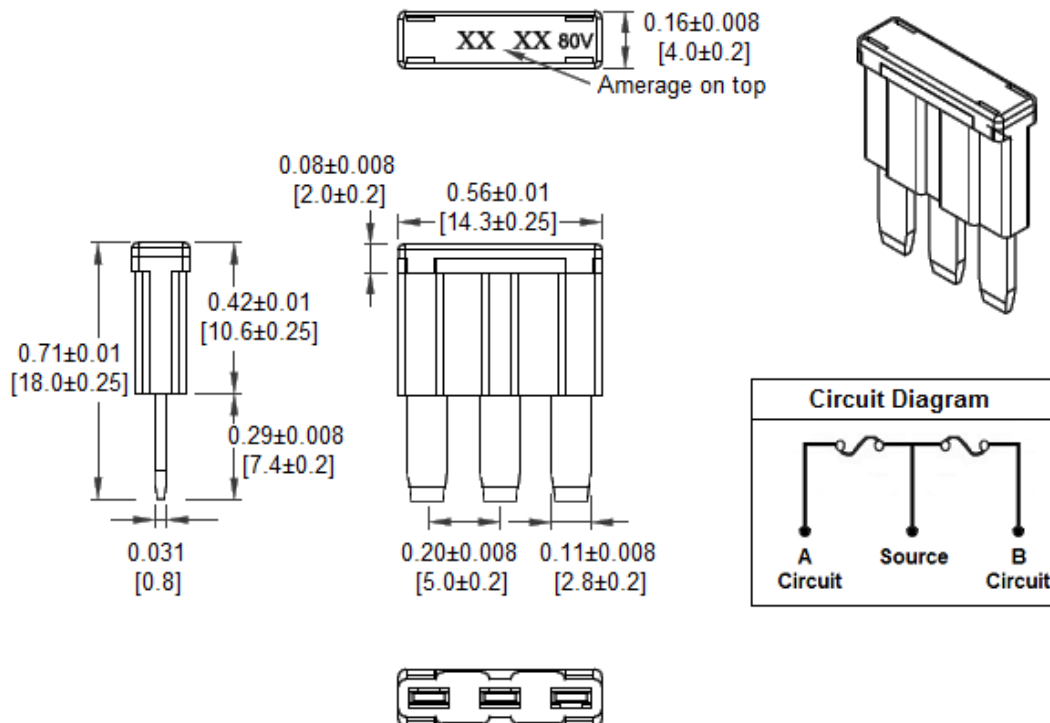

## Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.