


環保物料專用
RoHS compliant

- NOTES: UNLESS OTHERWISE SPECIFIED.
- 1、 Important Dim.: (A)
 - 2、 Crimping PullOut Force: 1.10Kg Min.
 - 3、 Electrical Character: 100% Open/ Short
 - 4、 The red and blue wires are crossed

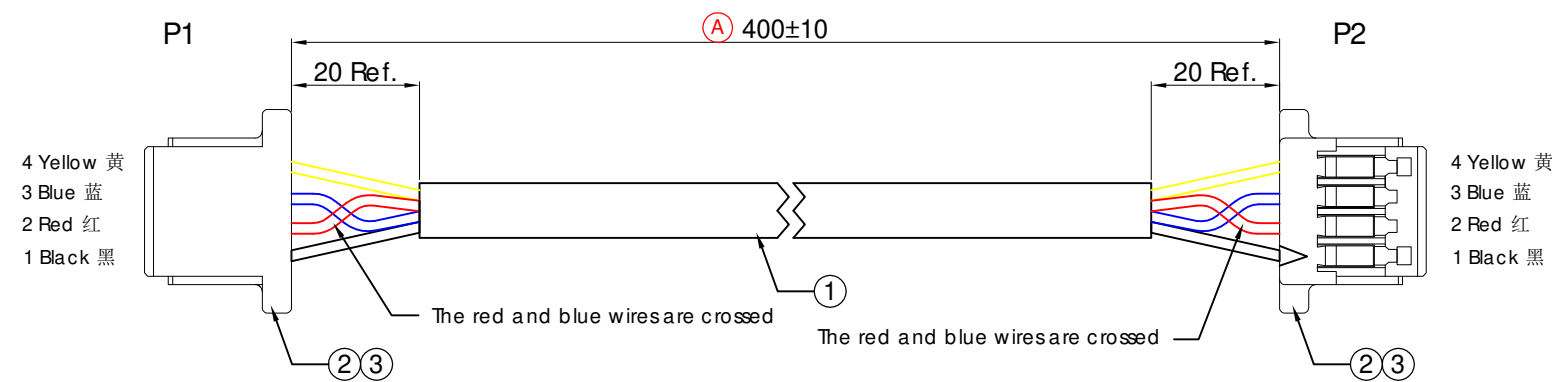

Bill Of Material

3	KWQS230	TER.	PH1.0 Phosphor Bronze, Tin Plating	PCS	8
2	KWQS230	CONN.	1.0 mm SH Housing 4P Black	PCS	2
1	KWQS248	Cable	28AWGX4C FLAT WIRE Black	mm	/
No.	Vendor	NAME	Material Name and Name	Unit	Qty

Wire Diagram		
CONN P1	CONN P2	COLOR
1	1	Black 黑
2	2	Red 红
3	3	Blue 蓝
4	4	Yellow 黄



DESCRIPTION(內容):
1.0PITCH HOUSING WIRE HARNESS

DRAWN(製圖):
Tom Liu
CHECKED(確認):
Jack Wu

GENERAL TOLERANCE	
LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

REV:	REV	DESCRIPTION	DATE
A/2	1	ORIGINAL	Jan-08-2022
	2	Change Wire sequence Flat Cable	Jan-17-2022
	3		
	4		

A4 SCALE(比例):
1:XX
THIRD ANGLE PROJECTION

PART NO:
(料號) CBH-C 16999-001
DWG NO(圖號): KWRD220108-021

APPROVAL(核准):
Kane He

UNIT: mm
SHEET: 1/1