


NOTES:

1. MATERIALS AND FINISHES:  
 BODY - BRASS, NICKEL PLATING  
 CONTACT - BRASS, GOLD PLATING  
 INSULATOR - DELRIN
2. ELECTRICAL:  
 A. IMPEDANCE: 50 OHM
3. MECHANICAL:  
 A. DURABILITY: 500 CYCLES MIN.  
 B. TEMPERATURE RANGE: -65° C TO +165° C
4. USE AMPHENOL RF CRIMP TOOL #CTL-2


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
A	OFFICIAL ENG.RELEASE TO MFG.	02-Oct-91	38063	DR
D	RE-DRAWN WITH GLOBAL FORMAT, [16.6] WAS: [15.0]	06-Sep-13	49726	RM/HP

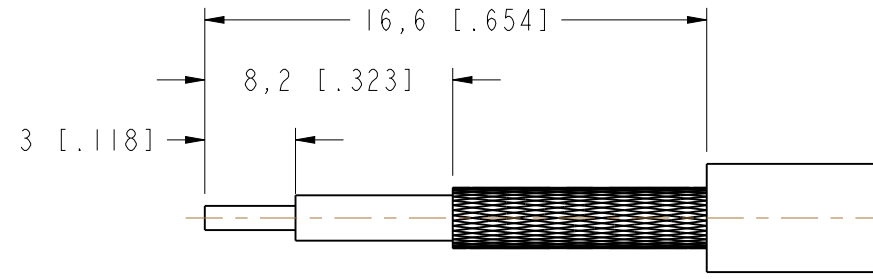

RECOMMENDED  
CABLE STRIPPING DIM'S

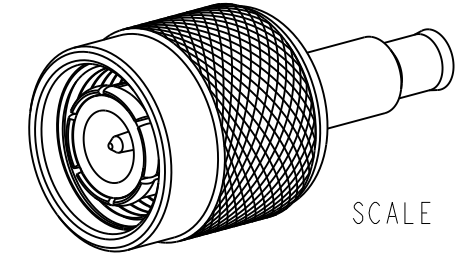

SCALE 2.000

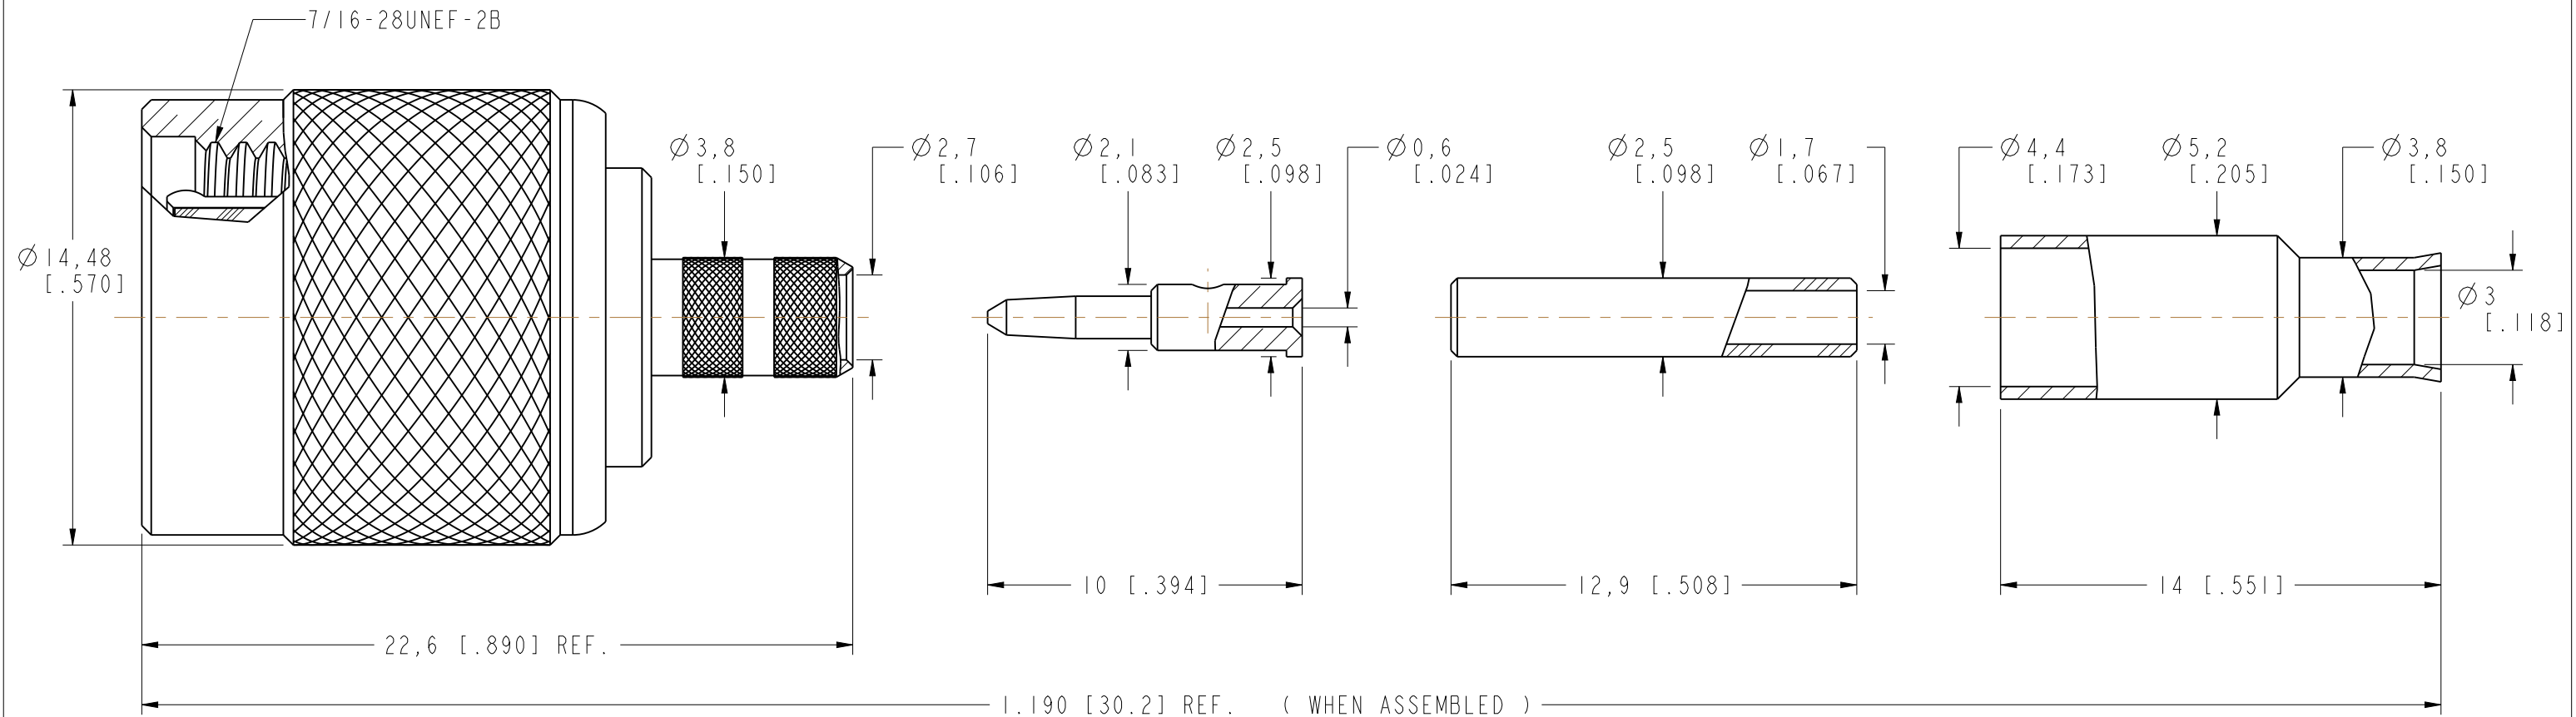

**CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  
 <0.5mm ±0.05mm    0.5 - 6mm ±0.1mm    6 - 30mm ±0.2mm    30 - 120mm ±0.3mm    ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN T. ALBERA	DATE 22-Apr-91	TITLE TNC CRIMP PLUG FOR RG-174, 188, & 316 CABLE, 50 OHM		Amphenol RF www.amphenolrf.com
REFERENCE AND CONFIGURATION LEVEL:	ENGINEER D. ROYCE	DATE 13-Sep-91	SCALE: 5.0:1.0   SHEET 2 OF 2		
FINISH	APPROVED H. PARIKH	DATE 06-Sep-13	DWG SIZE B	REV D	DRAWING NO. T1121E1-ND3G-316U-50
	CAD FILE				ITEM NO. 021121AAG36ND5F
					PART NO. 31-2315-RFX