

L204BB

EK0500-0009 Ver.C



PIN Diode


FEATURES

- Long Carrier Lifetime
- Low Distortion
- Large Dynamic Range
- RoHS Compliant

APPLICATIONS

- Filter Switches
- RF Attenuators (CATV etc)

DIMENSIONS

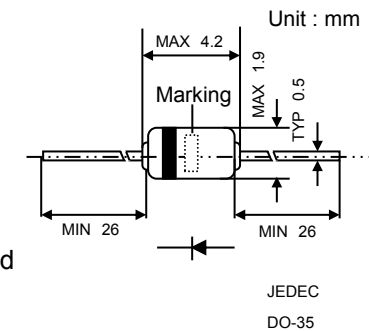

GENERAL DESCRIPTION

The L204BB is Long Carrier Life Time PIN diode designed for solid-state current control between Radio BC and 1GHz bands used in variable resistance attenuator.

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

SYMBOL	PARAMETER	RATINGS	UNITS
VRM	Repetitive Peak Reverse Voltage	30	V
VR	Reverse Voltage	28	V
P	Power Dissipation	200	mW
Tj	Junction Temperature	175	°C
Tstg	Storage Temperature Range	-55 to 175	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C)





SYMBOL	PARAMETER	CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
IR1	Reverse Current	VR = 30V	-	-	10	μA
IR2		VR = 28V	-	-	0.5	μA
VF	Forward Voltage	IF = 100mA	-	-	1.0	V
rfs1	Forward Series Resistance	IF = 10mA, f = 50MHz	-	5.5	10	Ω
rfs2		IF = 10μA, f = 50MHz	1.0	2.0	-	kΩ
Ct	Diode Capacitance	VR = 15V, f = 1MHz	-	0.7	1.2	pF
τ	Life Time	IF = 10mA	-	2.1	-	μs
ts	Storage Time	IF = 10mA, IR = 10mA	0.6	1.5	-	μs

L204BB

EK0500-0009 Ver.C

PIN Diode

TYPICAL PERFORMANCE CHARACTERISTICS

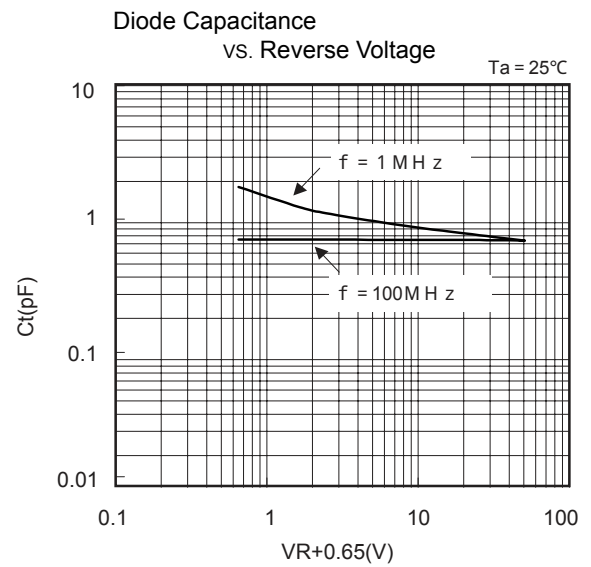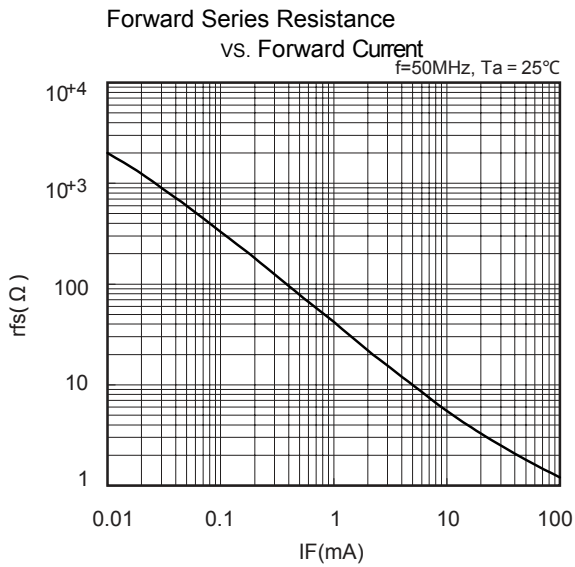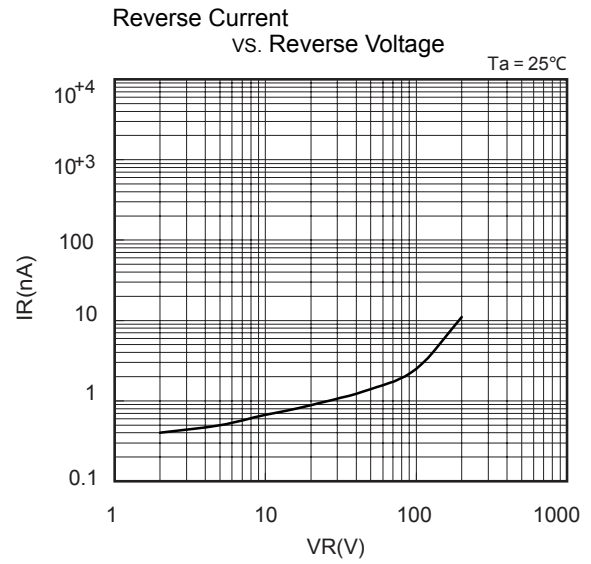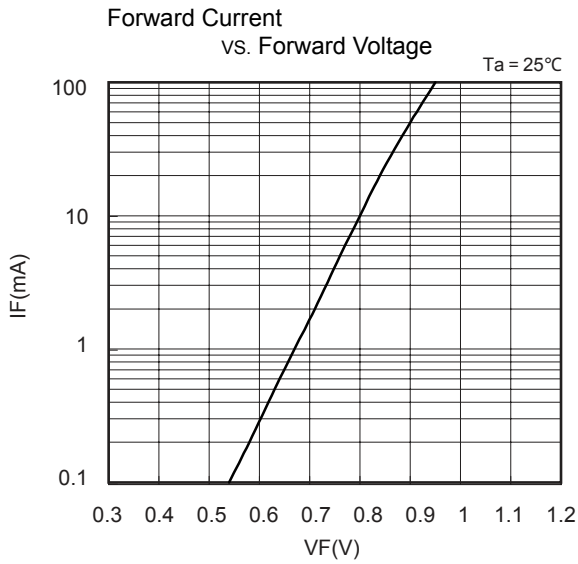



IMPORTANT NOTICE

Litec Corporation reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.

Litec Corporation does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Litec Corporation and all the companies whose products are represented on our website, harmless against all damages.

The products located on our website at www.litec-corp.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Litec Corporation.

CONTACT

CEL
4590 Patrick Henry Drive, Santa Clara, Ca 95054
TEL: (408) 919-2500
www.cel.com