

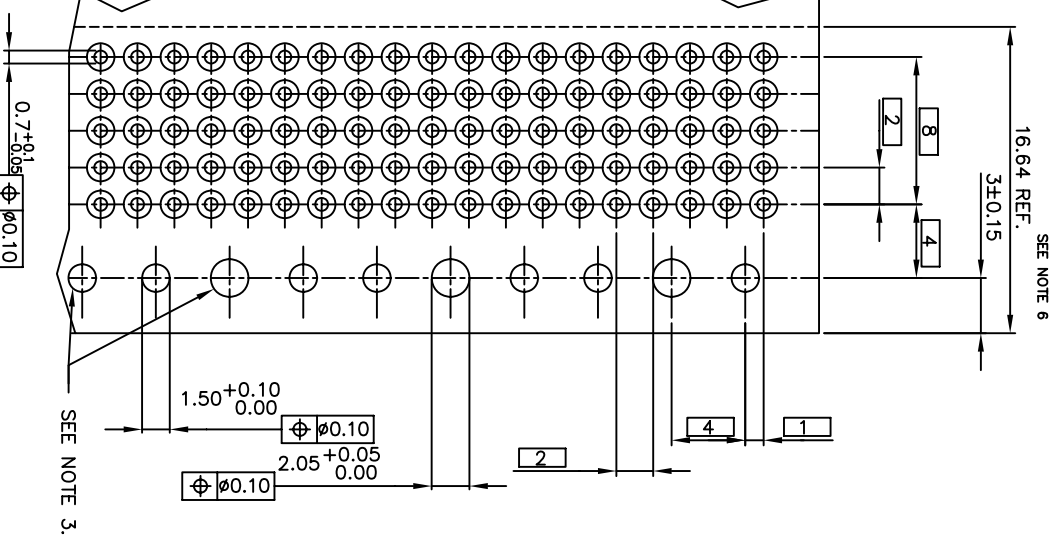


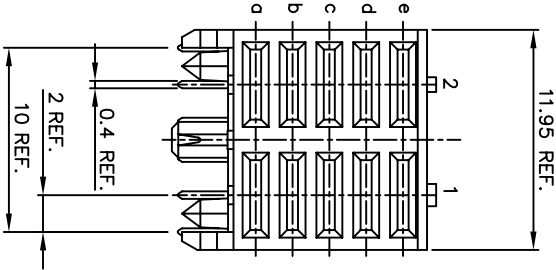
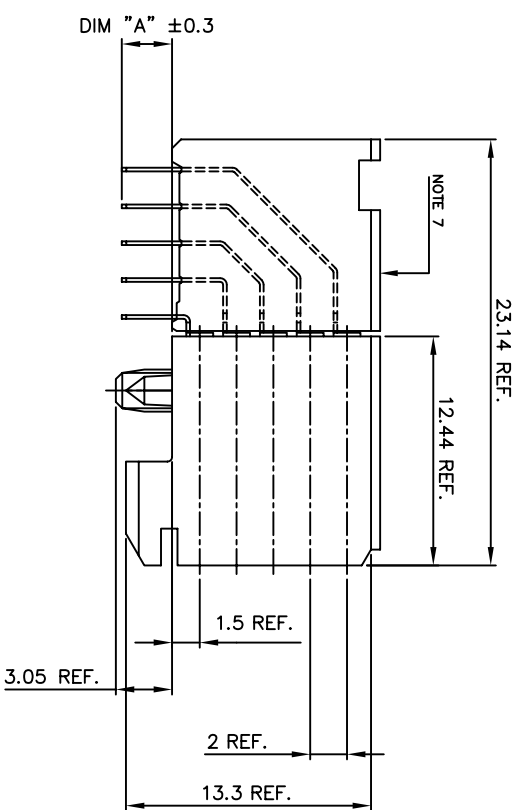


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1TY	TELCORDIA CO
-2TY	CUSTOMER SPECIAL
-3TY	CUSTOMER SPECIAL
-9TY	TELCORDIA CO
-1TYE	TELCORDIA CO
-2TYE	CUSTOMER SPECIAL
-3TYE	CUSTOMER SPECIAL
-9TYE	TELCORDIA CO

PC BOARD VERSIONS		PCB THICKNESS	DIM "A"	ROWS KIND
PRODUCT NR:	85876-X02LF	1,6	2,90	With Row a,b,c,d,e
	85876-X12LF	2,4	3,53	With Row a,b,c,d,e
	85876-X22LF	1,6	2,90	With Row a,c,d,e

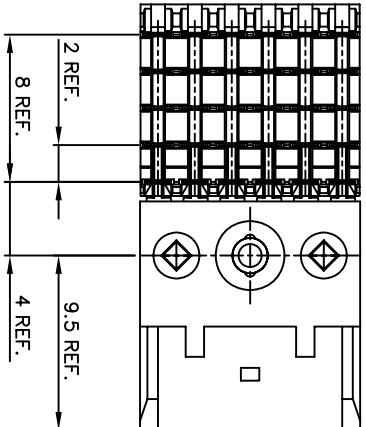

PC BOARD THICKNESS \bar{n} 0.2 (SEE TABLE)

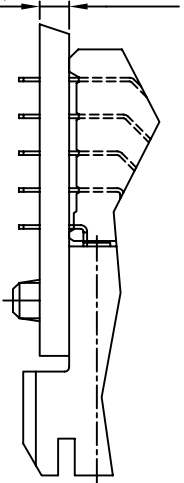

- NOTES:
- 1 BODY MATL: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 INDICATED HOLES ARE UNPLATED.
 - 4 PLATING OF COMPLIANT SECTIONS 0.5-1.5 μ m SnPb 85-97 OR 0.5-1.5 μ m PURE Sn FOR LEAD FREE.
 - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
 - 6 SET BACK FOR PRESS BLOCK
 - 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

mat'l. code	SEE NOTES	tolerances unless otherwise specified	CUSTOMER COPY	www.falcon.com
LF	ech no	dr	date	
H	int-10074H	10/29/13		
	linear	0x	0x	0x
	angles	0x	0x	0x
D	body-0107	041228	dr	fr
E	body-0406	041117	15/07/09	fr
F	body-011	18/15/08	chr	fr
G	int-0134	28/11/05	08/09/02	fr
sheet	revision	g		
index	sheet	1		



5 ROW POWER S.T.B.
RECEPTACLE 12mm MOD. P.P.
product family METRAL
size dng no 85876
code 213
sheet 1 of 1