


SRF4427
SRF4427G

* G Denotes RoHS Compliant, Pb Free Terminal Finish

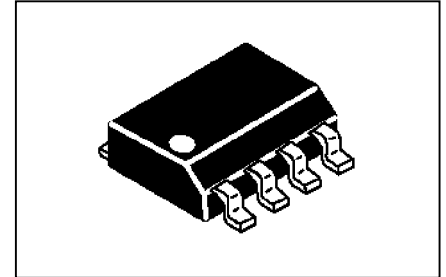

RF AND MICROWAVE DISCRETE LOW POWER TRANSISTORS GENERAL RF AMPLIFIER APPLICATIONS

Features

- **Low Cost SO-8 Plastic Surface Mount Package.**
- **S-Parameter Characterization**
- **Tape and Reel Packaging Options Available**
- **Maximum Available Gain – 20dB(typ) @ 200MHz**

DESCRIPTION:

Designed for general-purpose RF amplifier applications, such as pre-drivers and oscillators.

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
V _{CEO}	Collector-Emitter Voltage	18	Vdc
V _{CB0}	Collector-Base Voltage	36	Vdc
V _{EBO}	Emitter-Base Voltage	4.0	Vdc
I _C	Collector Current	400	mA

Thermal Data

P _D	Total Device Dissipation @ TC = 25°C	1.5	Watts
	Derate above 25°C	12.5	mW/°C
T _{STG}	Storage Temperature	-65 to + 150	°C
R _{θJA}	Thermal Resistance, Junction to Ambient	125	°C/W

ELECTRICAL SPECIFICATIONS (T_{case} = 25 °C)
STATIC (off)

Symbol	Test Conditions	Value			Units
		Min.	Typ.	Max.	
BV_{CEO}	Collector-Emitter Breakdown Voltage (I_C = 10 mA_{dc}, I_B = 0)	18	-	-	Vdc
BV_{CES}	Collector-Base Breakdown Voltage (I_C = 5 mA_{dc}, I_E = 0)	36	-	-	Vdc
BV_{EBO}	Emitter-Base Breakdown Voltage (I_E = 5 mA_{dc}, I_C = 0)	4	-	-	Vdc
I_{CBO}	Collector Cutoff Current (V_{CB} = 12.5 Vdc)	-	-	800	uA

STATIC (on)

Symbol	Test Conditions	Value			Units
		Min.	Typ.	Max.	
HFE	DC Current Gain (V_{CE} = 5 Vdc, I_C = 150 mA_{dc})	20		200	

DYNAMIC

Symbol	Test Conditions	Value			Units
		Min.	Typ.	Max.	
F_{TAU}	Current-Gain Bandwidth Product (I_C = 50 mA_{dc}, V_{CE} = 12 Vdc, f = 200 MHz)		1.3		GHz
C_{OB}	Output Capacitance (V_{CB} = 12 Vdc, I_E = 0, f = 1.0 MHz)			3.4	GHz

FUNCTIONAL

Symbol	Test Conditions	Value			Unit
		Min.	Typ.	Max.	
G_{PE}	Power Gain V_{CE} = 12 Vdc, f = 175 MHz, Pin = 15 mW	17	18	-	dB
 S₂₁ ²	Insertion Gain V_{CE} = 12 Vdc, I_C = 50 mA_{dc}, f = 200 MHz	12	14	-	dB

**SRF4427
SRF4427G**

PACKAGE MECHANICAL DATA

