

- Mini-Precision Current Transformer
- Excellent linearity over the entire range
- Ideal for Current Measurement, Monitoring & Protection Applications
- Operating Temp: -10°C to +65°C
- Storage Temp: -25°C to +85°C
- Dielectric Withstanding Voltage (Hi-pot): 4KVrms/1mA/1min
- Insulation Resistance: DC500V/100MΩ min
- Made with UL Approved Materials




Electrical Specifications	
Rated Primary Current (Amp) 50/60Hz	20nom (0.1~50A max)
Turns Ratio	Np:Ns = 1:1000
Current Ratio	20A / 20mA
Winding DC Resistance at 20°C	27~37Ω
Accuracy @ RL≤100Ω	1%

Mechanical Specifications	
CUP	PBT
Output Terminal	3 Pins Ø0.8
Approximate Unit Weight	17g

MECHANICAL

All specifications subject to change without notice.

Dimensions: $\frac{\text{inch}}{\text{mm}}$

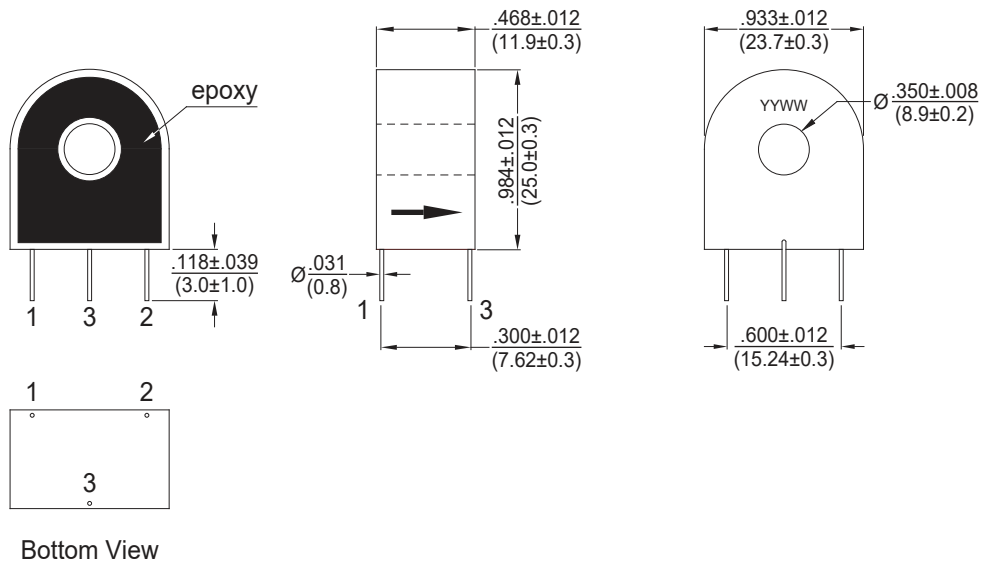

TEST CIRCUIT

