
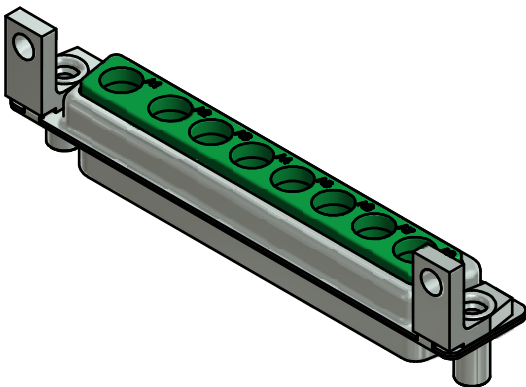
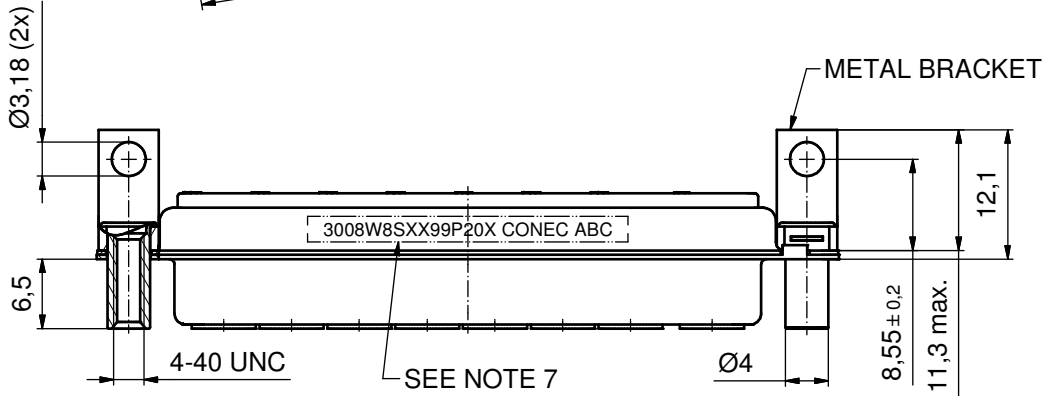
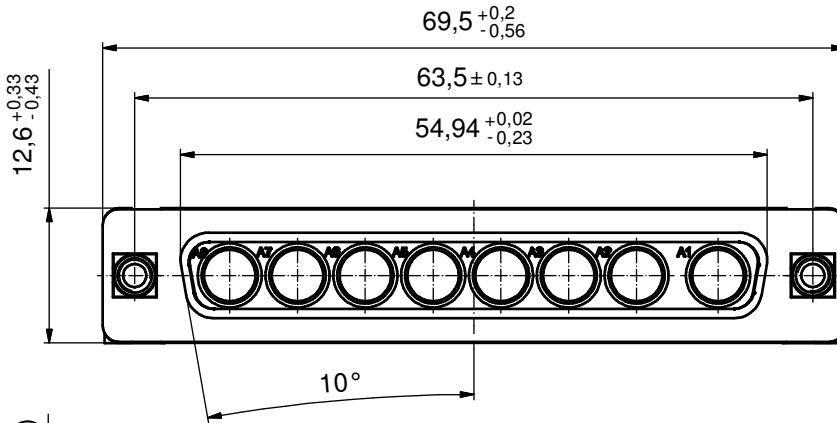
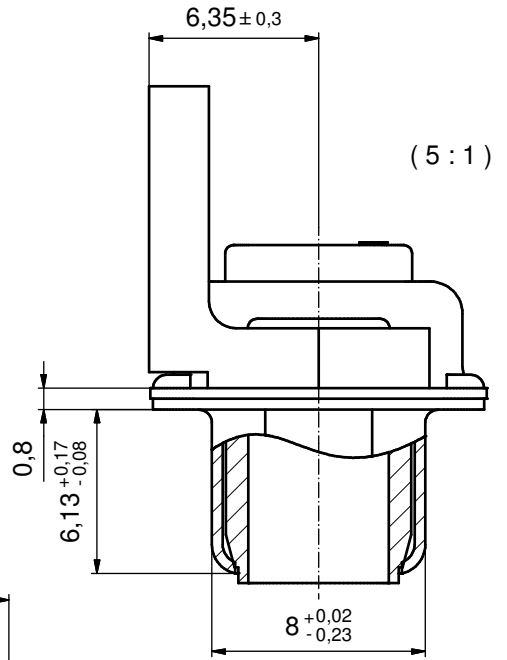


P.C.B. HOLE DRILLING
(P.C.B. TOP SIDE)

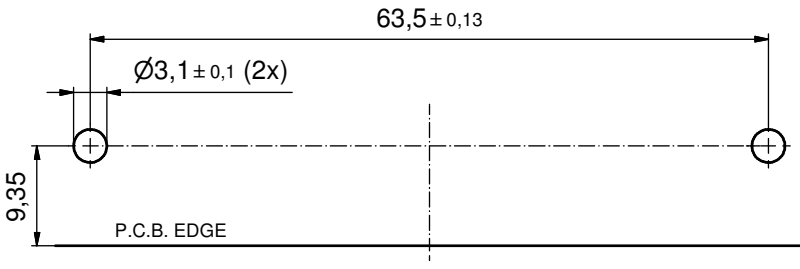

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATOR: PBT GF UL 94 V-0; GREEN
- NO CONTACTS ON POS. A1 - A8
- THREADED LOCKS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- METAL BRACKETS: ZINC DIE CAST; 300µin COPPER/ 40-120µin NICKEL/ 120-200µin TIN
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3008W8SXX99P20X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm	scale: 2:1 (5:1)		
				material: see notes		
	drawn	24.05.12	name		title:	
	appd.	24.05.12	name		D-SUB COMBINATION FEMALE	
	norm		name		8W8S	
	d-old		name		with threaded lock and metal bracket	
	a	Original	name		dwg no:	DIN-A3
rev.	description	date	name	13K1A3977	sh: 1	
CONEC				part no:	3008W8SXX99P20X	